

SPECIFICATION


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at25°C)

- | | | |
|---------------------------|---|------------------------|
| 2.1 Resonant Frequency | : | 3.8± 0.6 KHz |
| 2.2 Resonant Resistace | : | 500 Ω max |
| 2.3 Capacitance | : | 40000 pF± 30% at 100Hz |
| 2.4 Input Voltage | : | 30 Vp-p max |
| 2.5 Operating Temperature | : | -20~+60°C |
| 2.6 Storage Temperature | : | -20~+70°C |
| 3. DIMENSION | : | as per figure |

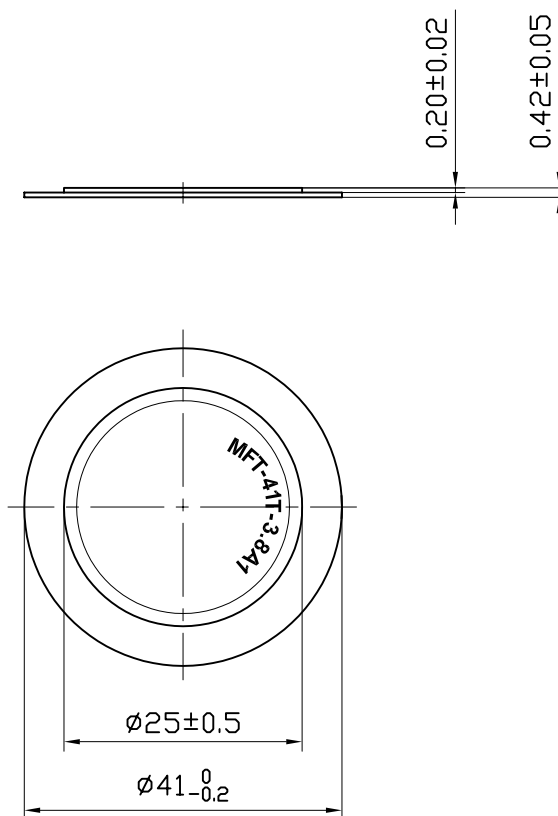


TOLERANCES UNLESS
NOTED OTHERWISE

.X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN

DESIGN

CHECKED

APPROVED

DATE

07.10.13

CONTRACT NO.

AGENCY APPROVAL

KEPO MODEL NO.

MFT-41T-3.8A1

DWG NO.

OEM2696

KEPO CO.,LTD.

CUSTOMER: QUARTZ

CUSTOMER NO.

VER

1.0

SCALE

UNIT

mm

SHEET

TEL:(+86)574-88370330

FAX:(+86)574-88370329