



actual size

JAS32P4 · AEC-Q200

4 Pad Version · 3.2 x 2.5 mm

- AEC-Q200 qualified
- recommended for automotive applications
- reflow soldering temperature: 260 °C max.
- metal/ceramic package



General Data

type	JAS32P4
frequency range	12.0 ~ 50.0 MHz (fund. AT-cut)
frequency tolerance at 25 °C	± 30 ppm, ± 50 ppm
load capacitance C_L	12 pF standard (option: 8 pF ~ 30.0 pF / series)
shunt capacitance C_0	< 5 pF
storage temperature	-40 °C ~ +150 °C
drive level max.	100 µW (10 µW recommended)
aging	< ± 3 ppm first year

ESR (series resistance R_s)

frequency in MHz	vibration mode	ESR max. in Ω	ESR typ. in Ω
12.0 ~ 15.999	fund.-AT	300	90
16.0 ~ 29.9	fund.-AT	220	70
30.0 ~ 50.0	fund.-AT	150	70

Frequency Stability vs. Temperature

		± 20 ppm	± 50 ppm	± 80 ppm		
-20 °C ~ +70 °C	STD.	○	○	○		
-40 °C ~ +85 °C	T1	○	○	○		
-40 °C ~ +105 °C	T2		○	○		
-40 °C ~ +125 °C	T3			○		

○ available

Marking


frequency with load capacitance code
company code / date code / internal code

date code: year / month

example: 9A = 2009 January

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Dimensions

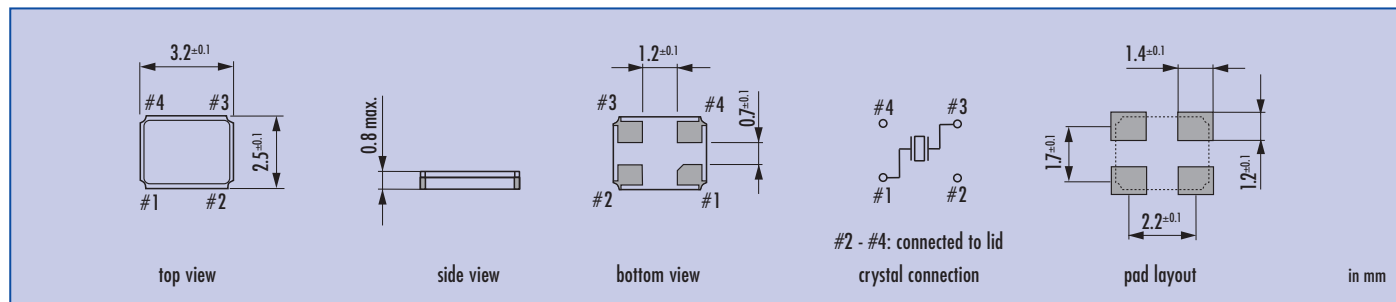

Order Information

Q	frequency	type	load capacitance	stability at 25 °C	stability vs. temp. range	option
Quartz	12.0 ~ 50.0 MHz	JAS32P4	12 pF standard 8 pF ~ 30 pF S for series	30 = ± 30 ppm 50 = ± 50 ppm	20 = ± 20 ppm 50 = ± 50 ppm 80 = ± 80 ppm	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C T3 = -40 °C ~ +125 °C

Example: Q 28.0-JAS32P4-12-30/50-LF (Suffix LF = RoHS compliant / Pb free pads)