


CRYSTAL UNIT



Pb

RoHS

Lead-free Products

CERAMIC SMD TYPE

SX-22

- Four pad ceramic surface mount package

- AT cut

- Tight tolerance/stability

- Using highly reliable seam weld method

- Taping and reel available, automatic mountable

- Pb-free and RoHS compliance

ELECTRICAL SPECIFICATIONS


Frequency Range	16.000 to 50.000MHz
Operating Temperature Range	-10 to +60℃ (STD), -20 to +70℃, -40 to 85℃, or specify
Storage Temperature Range	-40 to +85℃
Frequency Tolerance (at 25℃)	± 15, ± 30, ± 50ppm(STD), or specify
Frequency stability Over Operating Temperature Range	See Table1 in page 4
Load Capacitance(CL)	8pF(STD), Custom CL≥6pF or Series Resonant
Drive Level	10μW(100μW max.)
Shunt Capacitance(Co)	5.0pF max.
Aging (at 25℃)	± 3.0ppm/year max.
Insulation Resistance	500MΩ min. at 100VDC

EQUIVALENT SERIES RESISTANCE(ESR)

Frequency Range(MHz)	ESR(Ω MAX.)	Mode of Oscillation
16.000 ~ 19.999	120	Fundamental
20.000 ~ 29.999	80	Fundamental
30.000 ~ 50.000	50	Fundamental

MECHANICAL DIMENSIONS

(mm)

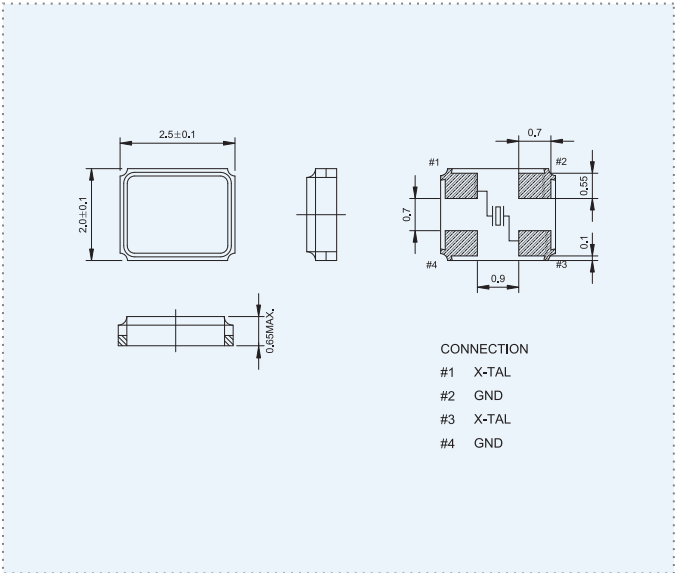

LAND PATTERN

(mm)

