

Thick Film Chip Resistor (RC Series)

Scope

— This specification applies to all sizes of rectangular-type fixed chip resistors with Ruthenium-base as material.

Features


- Small size and light weight
- Highly reliable multilayer electrode construction
- Compatible with all soldering process



Applications

- Telecommunication Equipments
- Radio and Tape Recorders, TV Tuners
- Video Cameras, Watches, Pocket Calculators
- Automotive Industry
- Computers, Instruments
- Medical and Military Equipment

Construction

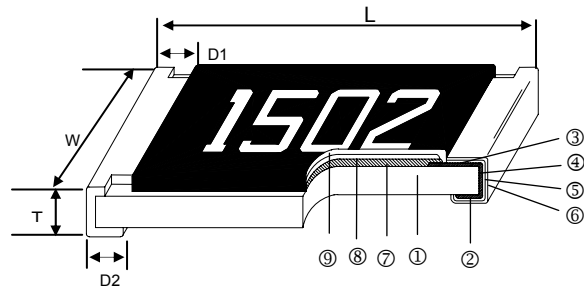

①	Alumina Substrate	④	Edge Electrode (NiCr)	⑦	Resistor Layer (RuO ₂ /Ag)
②	Bottom Electrode (Ag)	⑤	Barrier Layer (Ni)	⑧	Primary Overcoat (Glass)
③	Top Electrode (Ag-Pd)	⑥	External Electrode (Sn)	⑨	Secondary Overcoat (Epoxy)

Dimensions


Unit: mm

Type	Size (Inch)	L	W	T	D1	D2	Weight (g) (1000pcs)
RC0201	0201	0.60±0.03	0.30±0.03	0.23±0.03	0.15±0.05	0.15±0.05	0.150
RC0402	0402	1.00±0.05	0.50±0.05	0.35±0.05	0.20±0.10	0.20±0.10	0.620
RC0603	0603	1.60±0.10	0.80±0.10	0.45±0.10	0.30±0.20	0.30±0.20	2.042
RC0805	0805	2.00±0.10	1.25±0.10	0.50±0.10	0.35±0.20	0.40±0.20	4.368
RC1206	1206	3.10±0.10	1.55±0.10	0.55±0.10	0.50±0.25	0.50±0.20	8.947
RC1210	1210	3.20±0.20	2.60±0.15	0.55±0.10	0.50±0.25	0.50±0.20	15.959
RC2010	2010	5.00±0.20	2.50±0.15	0.55±0.10	0.60±0.25	0.50±0.20	24.241
RC2512	2512	6.35±0.20	3.20±0.15	0.55±0.10	0.60±0.25	0.50±0.20	39.448

Part Numbering

RC	0603	T	R	-	07	100R	L
Product Type	Size	Resistance Tolerance	Packaging Type	Temperature Coefficient of resistance	Taping Reel	Resistance	Marking Code
	0201 0402 0603 0805 1206 1210 2010 2512	F: $\pm 1\%$ J: $\pm 5\%$	R: Paper/PE taping reel K: Embossed taping reel	-: Base on spec	07: 7 inch dia. reel 10: 10 inch dia. reel 13: 13 inch dia. Reel 7W: 7 inch Dia. Reel and 2 x standard power type.	1R : 1Ω 4R7: 4.7Ω 1K: $1K\Omega$ 1M: $1M\Omega$	Latter L is system default code for order only.

Derating Curve

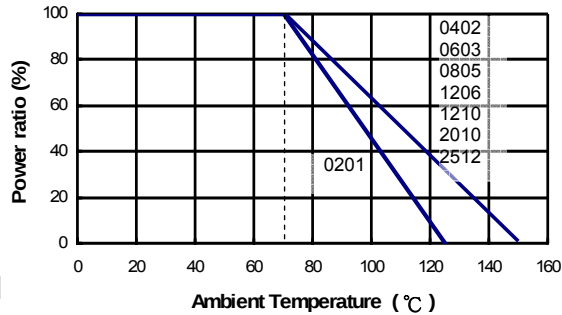

Standard Electrical

Item Type	Power Rating at 70°C Jumper Rated Current	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range		TCR (PPM/°C)
					$\pm 1\%$	$\pm 5\%$	
RC0201	1/20W	-55 ~ +125°C	25V	50V	1Ω - 10MΩ		± 200
Jumper	1A				0Ω (<50mΩ)		-
RC0402	1/16W	-55 ~ +155°C	50V	100V	1Ω - 9.76Ω 10Ω - 1MΩ 1.02MΩ - 10MΩ		± 200 ± 100 ± 200
Jumper	1A				10.2MΩ - 20MΩ 20.5MΩ - 100MΩ 0Ω (<50mΩ)		± 200 ± 400 -
RC0603	1/10W	-55 ~ +155°C	75V	150V	1Ω - 9.76Ω 10Ω - 1MΩ 1.02MΩ - 20MΩ 20.5MΩ - 100MΩ		± 200 ± 100 ± 200 ± 400
Jumper	1A				0Ω (<50mΩ)		-
RC0805	1/8W	-55 ~ +155°C	150V	300V	1Ω - 9.76Ω 10Ω - 1MΩ 1.02MΩ - 20MΩ 20.5MΩ - 100MΩ		± 200 ± 100 ± 200 ± 400
RC1206	1/4W		200V	400V	0Ω (<50mΩ)		-
Jumper	2A	-55 ~ +155°C	200V	400V	1Ω - 9.76Ω 10Ω - 1MΩ 1.02MΩ - 20MΩ 20.5MΩ - 39MΩ		± 200 ± 100 ± 200 ± 400
RC1210	1/3W				0Ω (<50mΩ)		-
Jumper	2.5A	-55 ~ +155°C	200V	400V	1Ω - 9.76Ω 10Ω - 1MΩ 1.02MΩ - 20MΩ 20.5MΩ - 100MΩ		± 200 ± 100 ± 200 ± 400
RC2010	3/4W				0Ω (<50mΩ)		-
Jumper	3.5A	-55 ~ +155°C	250V	500V	1Ω - 9.76Ω 10Ω - 1MΩ 1.02MΩ - 20MΩ 20.5MΩ - 100MΩ		± 200 ± 100 ± 200 ± 400
RC2512	1W				0Ω (<50mΩ)		-
Jumper	4A						

High Power & Ultra High Power Rating Electrical Specifications


Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range		TCR (PPM/°C)
					±1%	±5%	
RC0402	1/10W	-55 ~ +155°C	50V	100V	1Ω - 9.76Ω 10Ω - 1MΩ 1.02MΩ - 10MΩ		±200 ±100 ±200
RC0603	1/8W		50V	100V			
RC0805	1/4W		150V	300V			
RC1206	1/3 *1/2W		200V	400V			
RC1210	1/2 *3/4W		200V	400V			
RC2010	1W		200V	400V			
RC2512	2W		250V	500V			

*: Ultra High Power


Operating Voltage= $\sqrt{P \cdot R}$ or Max. operating voltage listed above, whichever is lower.

Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$ or Max. overload voltage listed above, whichever is lower.

Soldering Condition

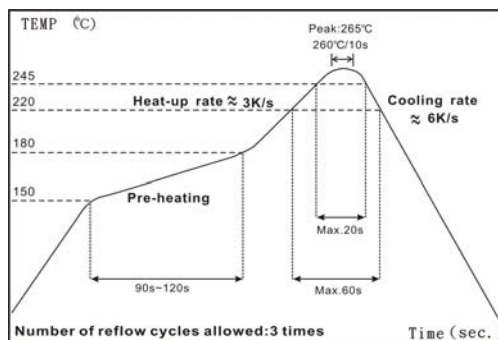

IR Reflow Soldering

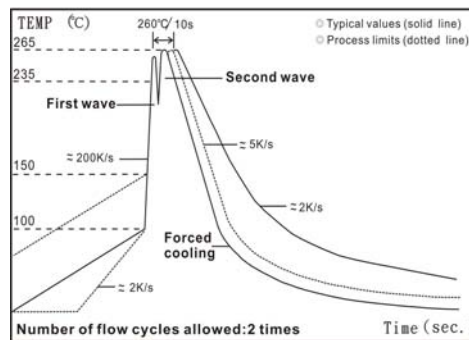

Wave Soldering (Flow Soldering)

- (1) Time of IR reflow soldering at maximum temperature point 260°C : 10s
- (2) Time of wave soldering at maximum temperature point 260°C : 10s
- (3) Time of soldering iron at maximum temperature point 410°C : 5s

Environmental Characteristics

Item	Requirement			Test Method
	±1% and Below	±5%	Jumper	
Temperature Coefficient of Resistance (T.C.R.)	As Spec.			JIS-C-5201-1 4.8 IEC-60115-1 4.8 -55°C~+125°C, 25°C is the reference temperature
Short Time Overload	±(1.0%+0.05Ω)	±(2.0%+0.05Ω)	<50mΩ	JIS-C-5201-1 4.13 IEC-60115-1 4.13 RCWV*2.5 or Max. overload voltage for 5 seconds, 2 seconds for high power series
Insulation Resistance	≥10G			JIS-C-5201-1 4.6 IEC-60115-1 4.6 Max. overload voltage for 1 minute
Endurance	±(2.0%+0.10Ω)	±(3.0%+0.10Ω)	<100mΩ	JIS-C-5201-1 4.25 IEC-60115-1 4.25.1 70±2°C, Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	±(2.0%+0.10Ω)	±(3.0%+0.10Ω)	<100mΩ	JIS-C-5201-1 4.24 40±2°C, 90~95% R.H. Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Dry Heat	±(1.0%+0.05Ω)	±(1.5%+0.10Ω)	<50mΩ	JIS-C-5201-1 4.23 IEC-60115-1 2.23.2 at +125/+155°C for 1000 hrs
Bending Strength	±(1.0%+0.05Ω)	±(1.0%+0.05Ω)	<50mΩ	JIS-C-5201-1 4.33 IEC-60115-1 4.33 Bending once for 5 seconds

				2010, 2512 sizes: 2mm Other sizes: 3mm
Solderability	95% min. coverage			JIS-C-5201-1 4.17 IEC-60115-1 4.17 245±5°C for 3 seconds
Resistance to Soldering Heat	±(0.5%+0.05Ω)	±(1.0%+0.05Ω)	<50mΩ	JIS-C-5201-1 4.18 IEC-60115-1 4.18 260±5°C for 10 seconds
Voltage Proof	No breakdown or flashover			JIS-C-5201-1 4.7 IEC-60115-1 4.7 1.42 times RCWV (RMS) for 1 minute
Leaching	Individual leaching area ≤ 5% Total leaching area ≤ 10%			JIS-C-5201-1 4.18 IEC-60068-2-58 8.2.1 260±5°C for 30 seconds
Rapid Change of Temperature	±(0.5%+0.05Ω)	±(1.0%+0.05Ω)	<50mΩ	JIS-C-5201-1 4.18 IEC-60115-1 4.18 -55°C to +125/+155°C, 5 cycles

■ **Storage Temperature: 25±3°C; Humidity < 80%RH**