

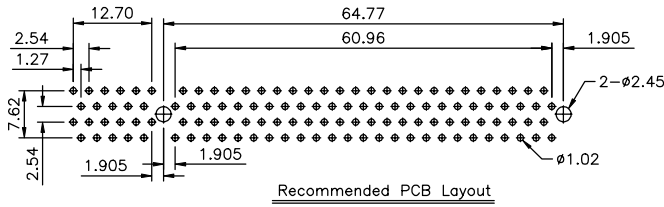





△SPECIFICATION
Voltage Rating:250V
Current Rating:1A
Contact Resistance Terminal:30 Milliohms Max.
Dielectric Withstanding Voltage:500V AC/Min
Insulation Resistance:1000 Megaohms Min.
Housing:Nylon66, UL94V-0
Contact:Brass
Plating:Mating Area:Selective Gold Over Nickel
Solder Area:Tin Over Nickel
RoHS Compliant

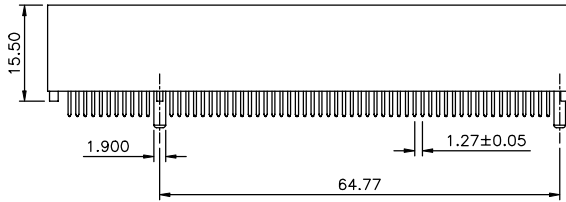

Recommended PCB Layout

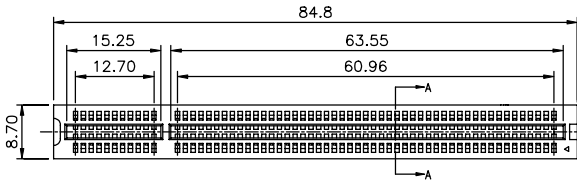

△ AUK P/N	Plated
PCI120D-H	Gold Flash
PCI120D-S15-H	15u"
PCI120D-S30-H	30u"

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
PART No.		CHECKED BY		X.±0.20		B3		Modify Dim.	
DRAWING No.		DRAWING BY		.X±0.15		B2		Modify P/N:PCI120D-H → PCI120D-SXX-H	
SCALE		REV.		.XX±0.10		B1		Modify Specifications	
NONE		B3		.XXX±0.05		B0		NEW RELEASE	
						NO. REV.		REVISIONS	
								CHK	
								DATE	

04/14/2009	HZF	Modify Dim.	B3	△
04/13/2009	HZF	Modify P/N:PCI120D-H → PCI120D-SXX-H	B2	△
10/15/2008	HZF	Modify Specifications	B1	△
06/27/2007	HZF	NEW RELEASE	B0	△