


标记 △	日期	姓名	变更内容
---------	----	----	------


NO.	名称 NAME	数量/Q'TY
1	基座 Housing	1
2	按钮 Rocker	1
3	中角 Terminal	1
4	边角 Terminal	1
5	内套 endotheca	1
6	跷板 rocker	1
7	扭簧 Torsional spring	1
8	圆铁套 Round iron set	1

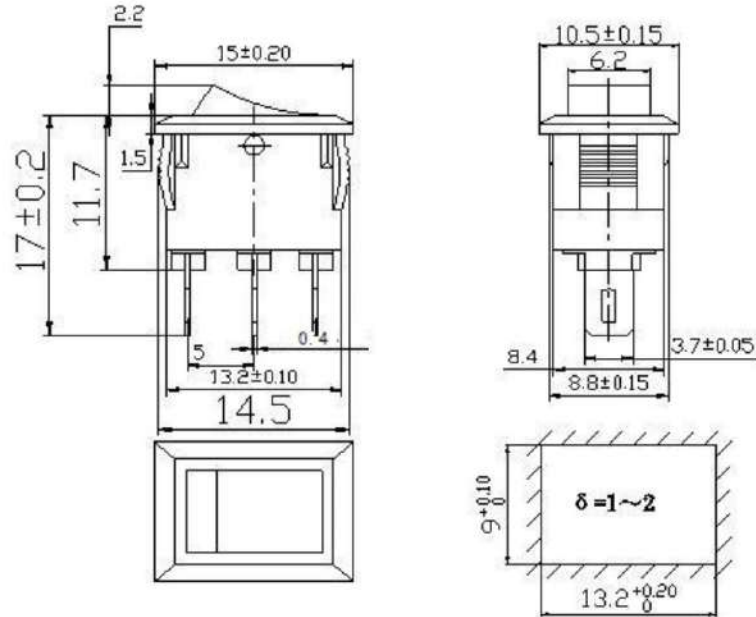

序列号

KCD5-102

电路图



说明:

- 额定值/Rating: CQC, CE:3A 250VAC T85
6A 125VAC T85
- 动作力/Operation force:3~10N;
- 手感: 应顺畅, 换位可靠, 无异常阻滞;
Hand feel: smoothly, release free ,no abnormal
- 接触电阻≤50mΩ
Contact resistance≤50m
- 耐高压:端子与操动件间:1500VAC 5S
端与端:1000VAC 5S;
Dielectric withstand: Terminal to Actuator:1500VAC 5S
Terminal to Terminal:1000VAC 5S
- 绝缘电阻≥100MΩ 500V DC 1min;
Insulation Resistance≥100M 500V DC 1min
- 电气寿命≥1E4
Endurance life≥5E4

未注公差尺寸 Note the tolerance size	一般公差 Tolerance	>0~6	±0.05	名称 name	型号Model: KCD5-102			
		>6~20	±0.1		料号Material code:			
		>20~50	±0.2					
		>50~100	±0.4					
		>100	±0.8					
角度尺寸 Angle:		±2°		跷板开关 Rocker switch	单位Unit: MM		比例Scale: 1: 1	
绘图: Drawing By:					版次Version: A1		视角: 	
审 核: Check By:					第 1 页 共 1 页			
核 准: Approval By:								
				 乐清市戴尔电子有限公司 YUEQING DAIER ELECTRON CO.,LTD				