

Tact Switch Series


KLS7-TS3603 3x6 Tact Switch Series

ELECTRICAL



1. Rating: 50mA 12VDC
2. Contact Resistance : 50mΩ max(initial)
3. Insulation Resistance: 100MΩ(minDC 250V)
4. Dielectric Strength : AC250V(50/60Hz for 1minute)
5. Electrically Life: 100000cycles
6. Environment temperature: -30°C~+120°C
7. Operating Force: 180/250(±30gf)
8. Seal temperature: 260°C~ 280°C



Dimension (unit: mm)

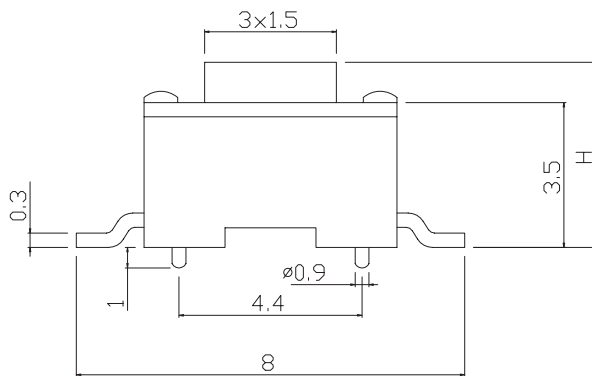

H
4.3
5.0

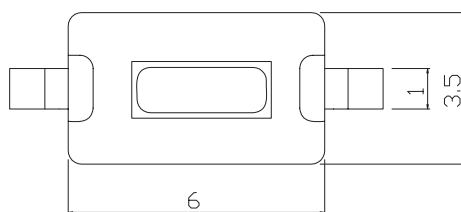

PCB LAYOUT

ORDER INFORMATION

KLS7-TS3603 -4.3-180 -B

Series No. _____ Packing: B=Bulk T=Tape
 Height: 4.3mm/5.0mm _____ Operating Force :180~250gf

Switch

Tact Switch Series

KLS7-TS3603B 3x6 Tact Switch Series


ELECTRICAL

- 1. Rating: 50mA 12VDC
- 2. Contact Resistance : 50mΩ max(initial)
- 3. Insulation Resistance: 100MΩ(minDC 250V)
- 4. Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5. Electrically Life: 100000cycles
- 6. Environment temperature: -30°C~+120°C
- 7. Operating Force: 180/250(±30gf)
- 8. Seal temperature: 260°C~ 280°C



VII



Dimension (unit: mm)

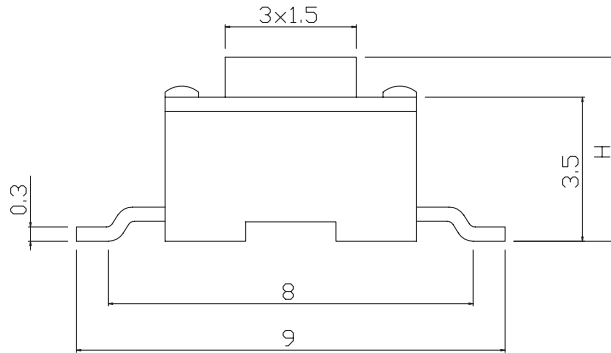

H
4.3
5.0

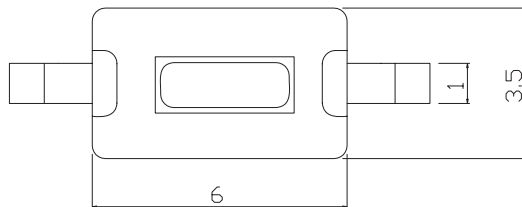

PCB LAYOUT

ORDER INFORMATION

KLS7-TS3603B -4.3-180 -B
 Series No. Packing: B=Bulk T=Tape
 Height: 4.3mm/5.0mm Operating Force :180~250gf