


# SPECIFICATION

- 1. Rated Voltage .....10Vp-p
- 2. Max. Rated Input Voltage .....30Vp-p
- 3. Rated Frequency Range .....2.5-60KHz
- 4. Rated Sensitivity .....92±3dB/w.10cm
- 5. Case Material .....PBT
- 6. Operating Temperature .....-20~+70 °C
- 7. Store Temperature .....-30~+80 °C
- 8. Weight .....10g

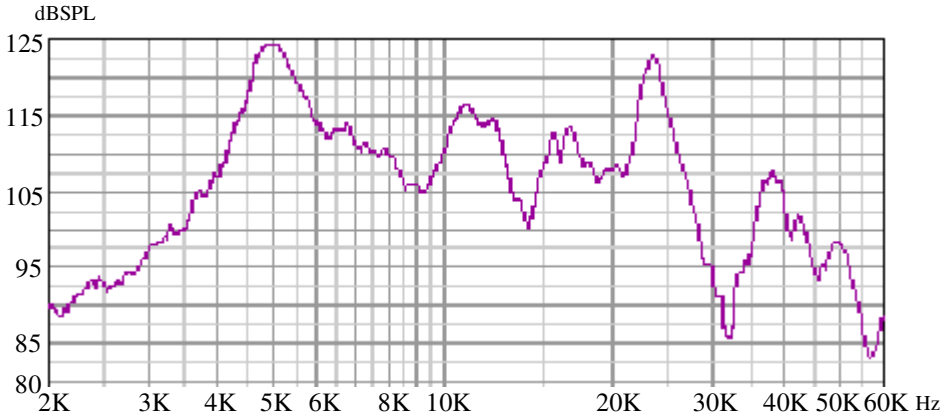

				<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
				<b>Ultra Sonic Transducer</b>	
				<b>PCT-5100</b>	
No.	DESCRIPTION	APPROVED	DATE	UNIT	
<small>           TOLERANCES UNLESS NOTED OTHERWISE:            .X . *            .XX . *            .XXX . *            90° FORMED ±2°            ANGLES ±1°            FIRST ANGLE PROJECTION         </small>		APPROVALS		DATE	mm
		DRAWN			DWG NO.
		CHECKED		SCALE	NOT TO SCALE
		APPROVED	05.03.19	SHEET	VER 1.3