
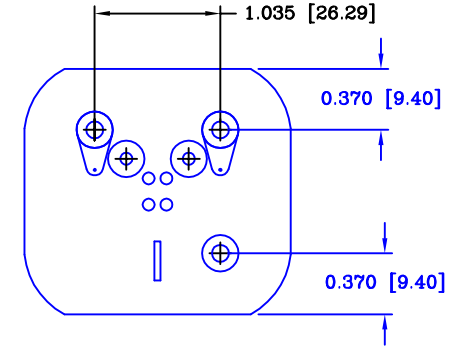
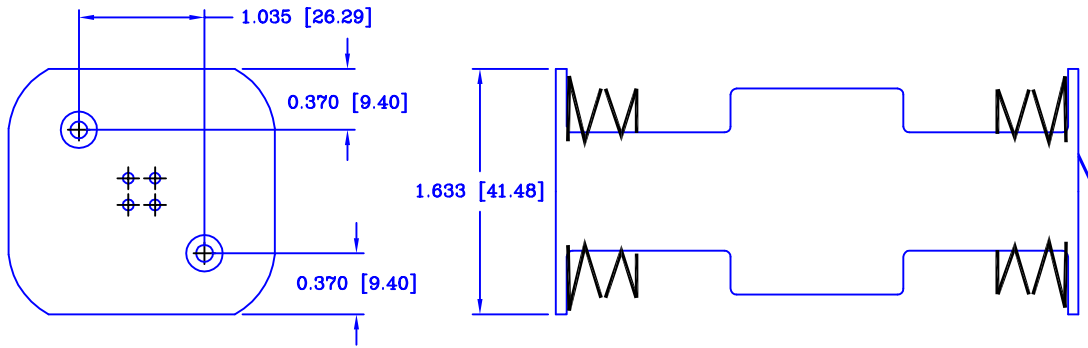


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|---------|-----|--|------|------|-----|
| 4/14/07 | A | ADDED "ROHS COMPLIANT" UPDATED MATERIAL SPEC. | T.B. | B.S. | |
| 5/05/07 | B | UPDATED TOLERANCE AND TITLE BLOCK | T.B. | B.S. | |
| | | | | | |

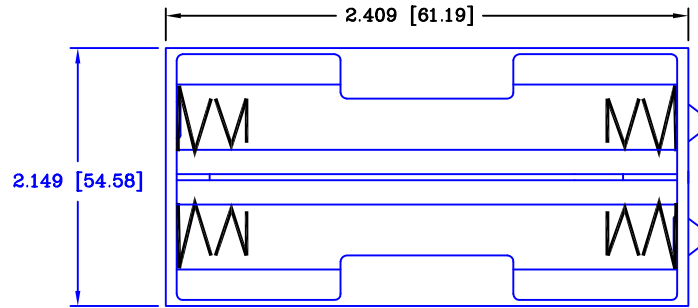

SPECIFICATIONS

Plastic material - Polypropylene, PP-1040
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA
 Rivets - Brass, Nickel Plated
 9Volt Snaps - Brass, Nickel Plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J00
 ROHS COMPLIANT

ORDERING CODE BH22C 

L- Solder Lugs
 W-(6") Wire Leads
 SF-9Volt type snaps
 B- Bump plates

| | | | | |
|--------------------------------|-------------------------------|--------------------------|--|------------------|
| Tolerance (Except as noted) | decimal ±.5 (.020) | Scale 1=1 | Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | Drawn By T.S. |
| | | | | Approved By T.B. |
| Fractional ± .8 (.030) | Title FOUR "C" CELL HOLDER | | | |
| Angular ± 3° | Date 5/05/07 | Drawing Number BH22CL | | |