
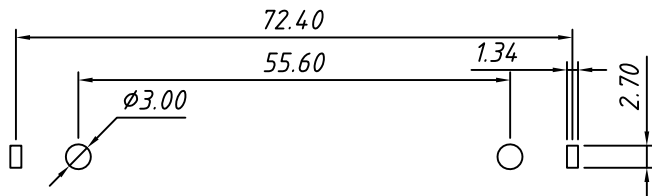

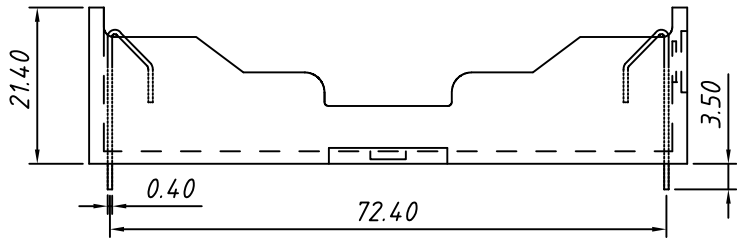


1
RoHS Compliant

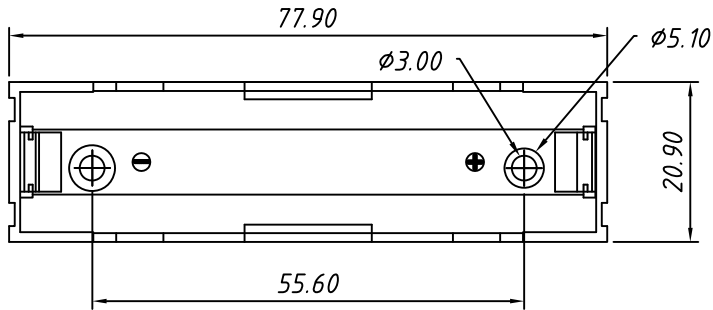

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

MATERIAL

Insulator: ABS, Black, UL 94HB

Contact: 304 Stainless Steel Spring
Temper, Nickel plated

ORDER INFORMATION:

L - KLS5 - 18650 - 006 - D
RoHS
1 Li-ion 18650 Battery Holder
D: with PC Pin

GENERAL TOLERANCE	±0.50	PROJECTION		Description:	1 Li-ion 18650 Battery Holder, with PC Pin
		UNITS	mm		
Angle TOLERANCE	±3°	SHEET SIZE	A4	L-KLS5-18650-006-D	
		KLS P/N:			
Draw:	Daniel		NingBo KLS ELECTRONIC CO.,L TD.		
Check:	Daniel				
Date:	2019-03-08				