



Model No.: GP164

Type	: Alkaline High Drain Button Cell		
Chemical System	: Alkaline Manganese Dioxide		
Nominal Voltage	: 1.5Volts		
Nominal Dimensions	: Ø6.80mm×2.15mm		
Application	: Analog Watch		
Average Weight	: 0.3g		
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.		
Shelf Life	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 20 ± 2 °C45-75%RH		
Close Circuit Voltage	: 1.40 Volts (min.)(load resistor 2kΩ at 20 ± 2 °C for 0.1 to 2 seconds)		
Nominal Service Life(to 1.0V at 20 ±2 °C)	: 300 hrs (at 50 kΩ load) 126 days (at 500 kΩ load)		
Average Service Capacity (to 1.0V at 20 ±2 °C)	: 8mAh(at 50 kΩ load)		
Cross References:			
IEC	JIS	Duracell	Others
LR621	-	LR620	SG1

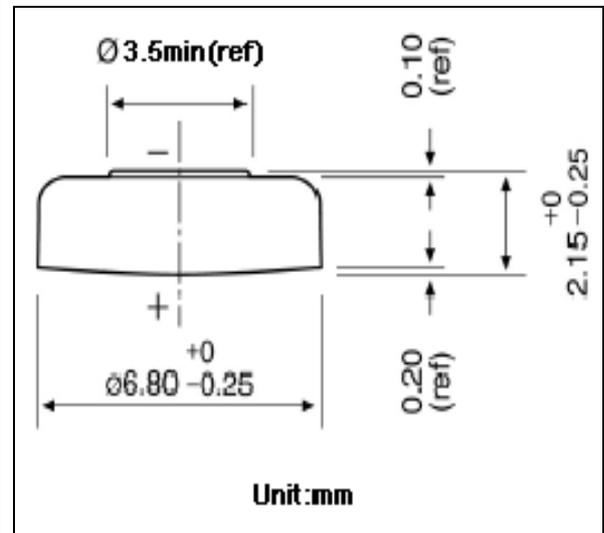

Typical Discharge characteristics at 20 ± 2 °C

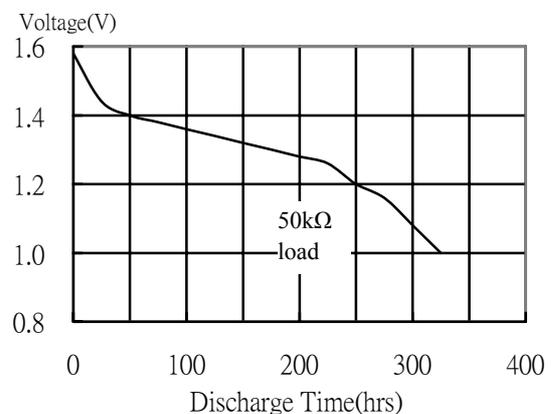

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.