


RADIAL TYPE

TH Series

High Ripple Current, High Reliability

JAMICON®

- High ripple current, low E.S.R. and long life
- Suitable for electronic ballast, adaptor and switching power




SPECIFICATION

Item	Characteristic											
Operation Temperature Range	-40 ~ +105°C				-25 ~ +105°C							
Rated Working Voltage	160 ~ 400VDC				450VDC							
Capacitance Tolerance (120Hz 20°C)	±20%(M)											
Leakage Current (20°C)	$I \leq 0.06CV + 10 (\mu A)$ Whichever is greater after 2 minutes				I : Leakage Current (μA)							
					C : Rated Capacitance (μF)							
Surge Voltage (20°C)	W.V.		160	200	250	400						
	S.V.		200	250	300	450						
Dissipation Factor (tan δ) (120Hz 20 °C)	W.V.		160	200	250	400						
	tan δ		0.15	0.15	0.15	0.24						
Low Temperature Stability	Impedance ratio at 120Hz											
	Rated Voltage (V)			160 ~ 250		400						
	-25°C / +20°C			3		6						
	-40°C / +20°C			4		—						
Load Life	After hours ($\phi D \leq 8\text{mm}$ 2000 hours, $\phi D \geq 10\text{mm}$ 3000 hours) application of W.V. and +105°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage \leq rate working voltage)											
	Capacitance Change		$\leq \pm 20\%$ of initial value									
	Dissipation Factor		$\leq 200\%$ of initial specified value									
Shelf Life	Leakage current \leq initial specified value											
	At +105°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (With voltage treatment)											

DIMENSIONS (mm)

ϕD	10	12.5	16	18
F	5.0	5.0	7.5	7.5
d	0.6	0.6	0.8	0.8
α	1.5	1.5	1.5	1.5

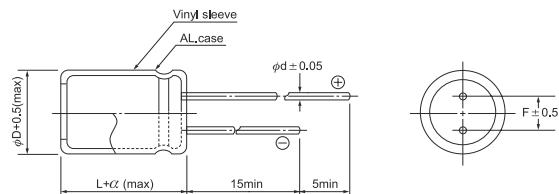

RIPPLE CURRENT COEFFICIENTS

Temperature(°C)	65	75	85	95	105
Multiplier	1.80	1.65	1.50	1.25	1.00

Frequency (Hz)	120	1k	10k	100k
W.V.	Multiplier			
160~450	0.50	0.80	0.90	1.00

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
 Max impedance : Ω 20°C 100kHz
 Max ripple current : mA(rms) 105°C 100kHz

μF	V(Code)	160 (2C)			200 (2D)			250 (2E)				
		Code	Item	DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.	R.C.
4.7	4R7									10x16	3.45	150
10	100	10x16	1.47	220	10x16	1.47	220	10x20	2.70	240		
22	220	10x20	0.80	350	10x20	0.80	350	12.5x20	1.47	380		
33	330	10x20	0.62	430	12.5x20	0.62	460	12.5x25	1.15	510		
47	470	12.5x20	0.50	550	12.5x25	0.50	610	16x25	0.92	610		
68	680	12.5x20	0.39	660	12.5x25	0.39	730	16x31.5	0.71	810		
100	101	16x25	0.32	890	16x31.5	0.32	980	18x35.5	0.59	1110		
220	221	16x35.5	0.17	1540	18x35.5	0.17	1640	18x40	0.31	1730		

μF	V(Code)	400 (2G)			450 (2W)				
		Code	Item	DxL	IMP.	R.C.	DxL	IMP.	R.C.
2.2	2R2						10x16	4.94	110
3.3	3R3	10x20	2.60	170	10x20	4.11	150		
4.7	4R7	10x25	2.20	220	12.5x20	3.47	190		
10	100	12.5x25	1.72	340	12.5x25	2.72	300		
22	220	16x25	0.94	510	16x31.5	1.48	500		
33	330	16x31.5	0.73	690	16x31.5	1.15	620		
47	470	16x31.5	0.59	820	18x31.5	0.92	780		
68	680	16x31.5	0.46	990					
100	101	18x31.5	0.38	1280					
120	121	18x35.5	0.32	1480					
150	151	18x40	0.26	1740					
180	181	18x40	0.23	1910					