
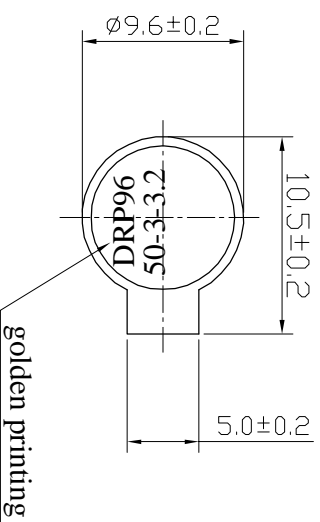
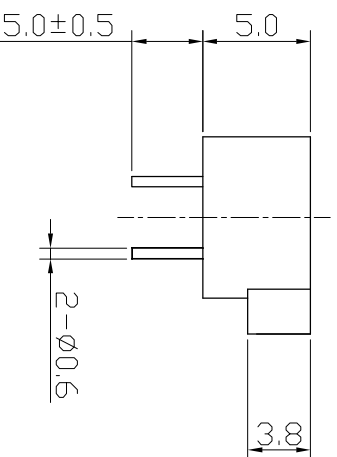


SPECIFICATION

- 1. Rated Voltage 3.6V
- 2. Operating Voltage 2~5V
- 3. Max. Rated Current 80mA
- 4. Coil Resistance 25±1Ω
- 5. Coil Impedance 40Ω
- 6. Min. Sound Pressure Level 87dB/10cm
- 7. Resonant Frequency 3200Hz
- 8. Case Material PBT
- 9. Operating Temperature -20~+70℃
- 10. Store Temperature -30~+80℃
- 11. Weight 1g



	add "Lettering"	LHU	07.11.15	KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com Magnetic Buzzer DRP9650-1616		
No.	DESCRIPTION	MENDER	DATE			
GOLD PRINTING NO. OF TERMINALS X X X 99 FORWARD ±2 99° ANGLE POSITION		APPROVALS	DATE			
		DRAWN				
		CHECKED		UNIT	DRAWING	
		APPROVED	05.05.28	SCALE	NOT TO SCALE	SHEET
				OEM1616		VER
				mm		1.1