

SPECIFICATION

受 控


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at 25°C)

- | | | |
|---------------------------|---|---------------------------|
| 2.1 Resonant Frequency | : | 2.4 ± 0.5 KHz |
| 2.2 Resonant Resistace | : | 100 Ω max |
| 2.3 Capacitance | : | 170000~273000 pF at 100Hz |
| 2.4 Operating Temperature | : | -20~+60°C |
| 2.5 Storage Temperature | : | -20~+70°C |
| 3. DIMENSION | : | as per figure |

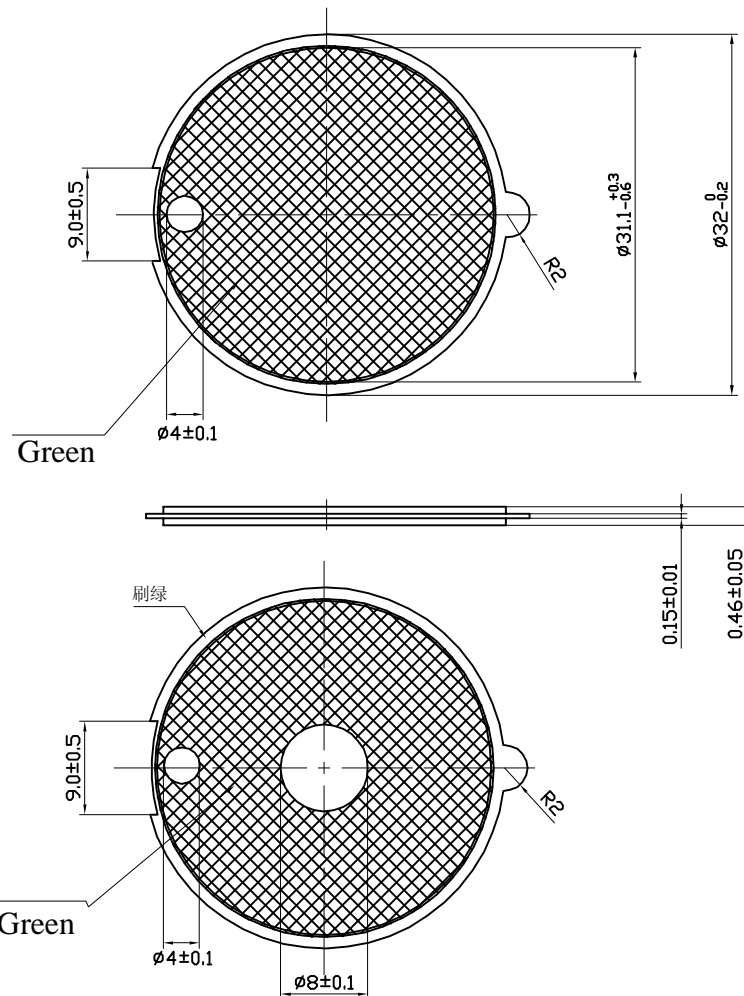

注:


- 1、不锈钢基片材质: SUS304
- 2、硬度: 3/4 hard
- 3、每批次蜂鸣片进料需附不锈钢的材质报告, 如钢带厂家变更, 需通知 KEPO

TOLERANCES UNLESS NOTED OTHERWISE

.X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN	汪逸	KEPO MODEL NO.	CUSTOMER		
DESIGN		FT-32G-2.4AS2	CUSTOMER NO.		
CHECKED					
APPROVED	徐锦生	DWG NO.	VER 1.2 SCALE		
DATE	2012.06.07	KP3.841.824.02			
CONTRACT NO.		KEPO CO.,LTD.	TEL:(+86)574-88370330 FAX:(+86)574-88370329		
AGENCY APPROVAL					

1

2

3

4