

规格书编号

SPEC NO :

产品规格书

SPECIFICATION

CUSTOMER 客户: _____
PRODUCT 产品: _____ SAW FILTER _____
MODEL NO 型号: _____ HDQSF389A2Dc SIP5Dc _____
PREPARED 编制: _____ CHECKED 审核: _____
APPROVED 批准: _____ D A T E 日期: _____ 2011-3-6 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

1.SCOPE



SHOULDER’s SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal. piezoelectrical chip. they are used in electronic equipments such as TV and so on.

2.Construction

2.1 Dimension and materials


Manufacturer’s name : HAODA ELECTRONICS Co. LTD(CHINA)

Type : QSF389A2Dc

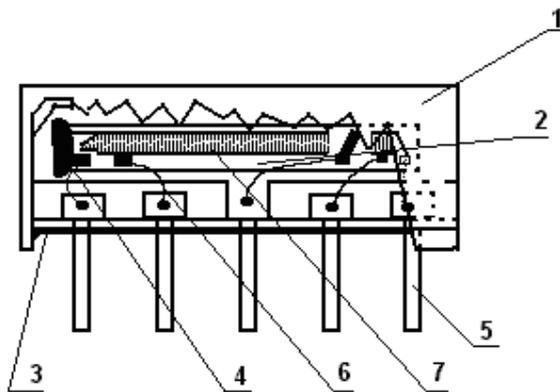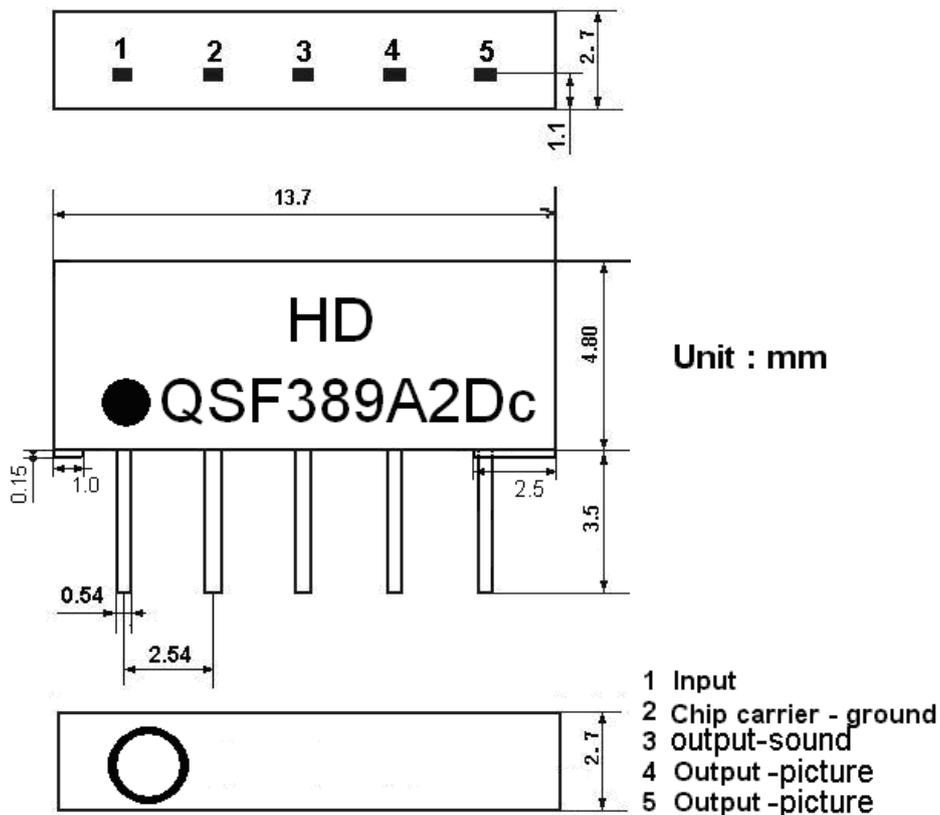

Components	Materials
1.Outer casing	PPS
2.Substrate	Lithium niobate
3.Base	Epoxy resin
4.Absorber	Epoxy resin
5.Lead	Cu alloy+ Ni plate+ Sn enameled
6.Bonding wire	AlSi alloy
7.Electrode	Al

2.2. Circuit construction, measurement circuit

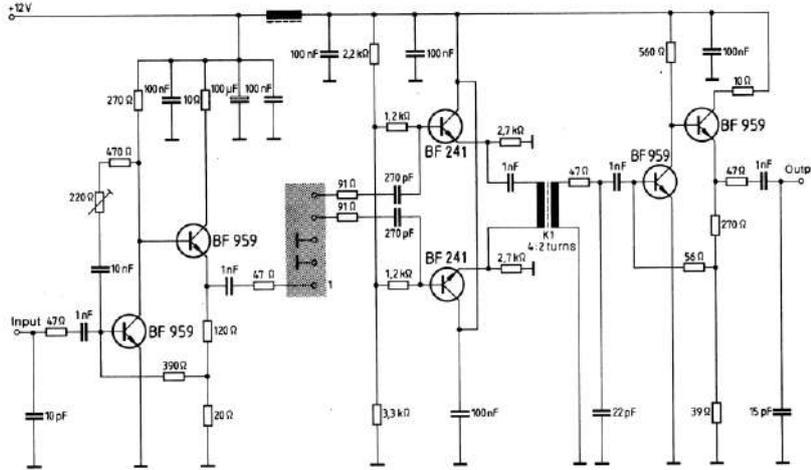

Test circuit for SIP-5 filter
Input impedance of the symmetrical post-amplifier: 2 kΩ in parallel with 3 pF

3.Characteristics

Items	Conditions	Specifications
Standard atmospheric conditions	Unless otherwise specified , the standard rang of atmospheric conditions for making measurements and tests is as follows; Ambient temperature : 15°C to 35°C Relative humidity : 25% to 85% Air pressure : 86kPa to 106kPa	There shall be no damage.
Operating temperature rang	Operating temperature rang is the rang of ambient temperatures in which the filter can be operated continuously. -20°C ~ +60°C	
Storage temperature rang	Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage. Conditions are as specified elsewhere in these specifications. -40°C ~ +70°C	
Reference temperature	+25°C	

3.1 Maximum Rating

DC voltage	VDC	12	V	Between any terminals
AC voltage	Vpp	10	V	Between any terminals

3.2 Electrical Characteristics

Characteristics of picture channel

Source impedance

$Z_s=50\Omega$

Load impedance

$Z_L=2k\Omega //3pF$

$T_A=25^\circ C$

Item	Freq	min	typ	max	
Insertion attenuation Reference level	37.40MHz	14.6	16.6	18.6	dB
Relative attenuation	38.90MHz	3.5	4.5	5.5	dB
	34.47MHz	-1.0	0.5	2.0	dB
	32.40MHz	28.0	38.0	-	dB
	33.40MHz	33.0	44.0	-	dB
	30.90MHz	34.0	45.0	-	dB
	31.90MHz	29.0	33.0	-	dB
	40.40MHz	38.0	53.0	-	dB
Sidelobe	25.00~30.90MHz	31.0	38.0		dB
	41.40~45.00MHz	33.0	42.0		dB
Reflected wave signal suppression 1.2 us ... 6.0 us after main pulse (test pulse 250 ns , carrier frequency 37.40 MHz)		40.0	52.0		dB
Feedthrough signal suppression 1.2 us ... 6.0 us after main pulse (test pulse 250 ns , carrier frequency 37.40 MHz)		45.0	55.0		dB
Group delay predistortion (reference frequency 37.4 MHz)					
	35.90 MHz	-	-40	-	ns
	34.47 MHz	-	50	-	ns
Impedance at 37.40 MHz:					
Input: $Z_{in} = R_{in} // C_{in}$		-	1.9//20.1	-	k Ω //pF
Output $Z_{out}=R_{out} // C_{out}$		-	2.8 //3.2	-	k Ω //pF
Temperature coefficient			-72		ppm/k

Characteristics of sound channel

Source impedance

 $Z_s=50\Omega$


Load impedance

 $Z_L=2k\Omega //3pF$
 $T_A=25^\circ C$

		Freq	min	typ	max	
Insertion attenuation		33.40MHz	-	16.6	-	dB
	Reference level					
Relative attenuation		32.40MHz	-3.2	-1.7	-0.2	dB
		38.90MHz	32.0	42.0	-	dB
		34.47MHz	20.0	36.0	-	dB
		30.90MHz	32.0	42.0	-	dB
		31.90MHz	-	0.0	-	dB
		40.40MHz	35.0	45.0	-	dB
		41.40MHz	35.0	45.0	-	dB
Sidelobe	25.00~30.90MHz		30.0	40.0		dB
	38.90~45.00MHz		32.0	42.0		dB
Impedance at 33.40 MHz:						
	Output	$Z_{out}=R_{out} // C_{out}$	-	4.5 //2.6	-	k Ω //pF
Temperature coefficient						ppm/K

3.3 Environmental Performance Characteristics


Item	Condition	Specifications									
High temperature	The specimen shall be store at a temperature of $80\pm 2^\circ C$ for $96\pm 4h$. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.	Mechanical characteristics and specifications in electrical characteristics shall be satisfied. There shall be no excessive change in appearance.									
Low temperature	The specimen shall be store at a temperature of $-20\pm 3^\circ C$ for $96\pm 4h$. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.										
Humidity	The specimen shall be store at a temperature of $40\pm 2^\circ C$ with relative humidity of 90% to 96% for $96\pm 4h$. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.										
Thermal shock	The specimen shall be subjected to 8 continuous cycles each as shown below. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.										
	<table border="1"> <thead> <tr> <th></th> <th>Temperature</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>$+25^\circ C \Rightarrow -40^\circ C$</td> <td>0.5h</td> </tr> <tr> <td>2</td> <td>$-40^\circ C$</td> <td>4h</td> </tr> </tbody> </table>		Temperature	Duration	1	$+25^\circ C \Rightarrow -40^\circ C$	0.5h	2	$-40^\circ C$	4h	
	Temperature	Duration									
1	$+25^\circ C \Rightarrow -40^\circ C$	0.5h									
2	$-40^\circ C$	4h									

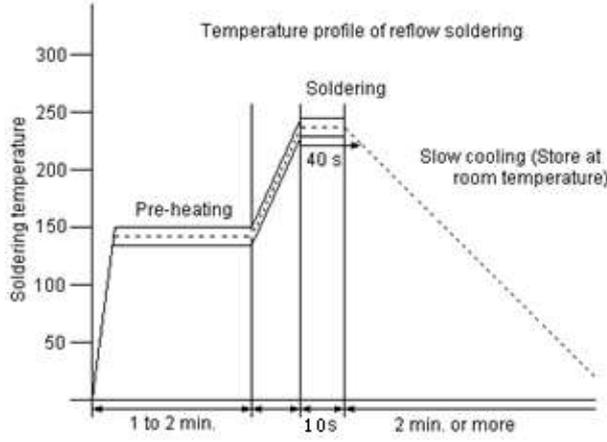	3	-40 °C=>+85 °C	2h	
	4	+85 °C	4h	
	5	+85 °C=>+25 °C	0.5h	
	6	+25 °C	1h	
Resistance to Soldering heat	<p>Reflow soldering method Peak: 255 ±5 °C, 220 ±5 °C, 40s At electrode temperature of the specimen.</p>  <p>The specimen shall be passed through the reflow furnace with the condition shown in the above profile for 1 time. The specimen shall be stored at standard atmospheric conditions for 1h, after which the measurement shall be made. Test board shall be 1.6 mm thick. Base material shall be glass fabric base epoxy resin.</p>			
Solder ability	Immerse the pins melt solder at 260°C+5/-0°C for 5 sec.		More then 95% of total area of the pins should be covered with solder	

3.4 Mechanical Test

Items	Conditions	Specifications
Vibration	600-3300rpm amplitude 1.5mm 3 directions 2 H each	There shall be no damage.
Drop	On maple plate from 1 m high 3 times	
Lead pull	Pull with 1 kg force for 30 seconds	
Lead bend	90° bending with 500g weigh 2 times	


3.5 Voltage Discharge Test

Item	Condition	Specifications
Surge	Between any two electrode 	There shall be no damage

3.6 Frequency response

Frequency response of picture channel


▶1: Transmission /M Log Mag 10.0 dB/ Ref -56.08 dB C
 ▷2: Transmission /M Log Mag 1.0 dB/ Ref -18.26 dB C

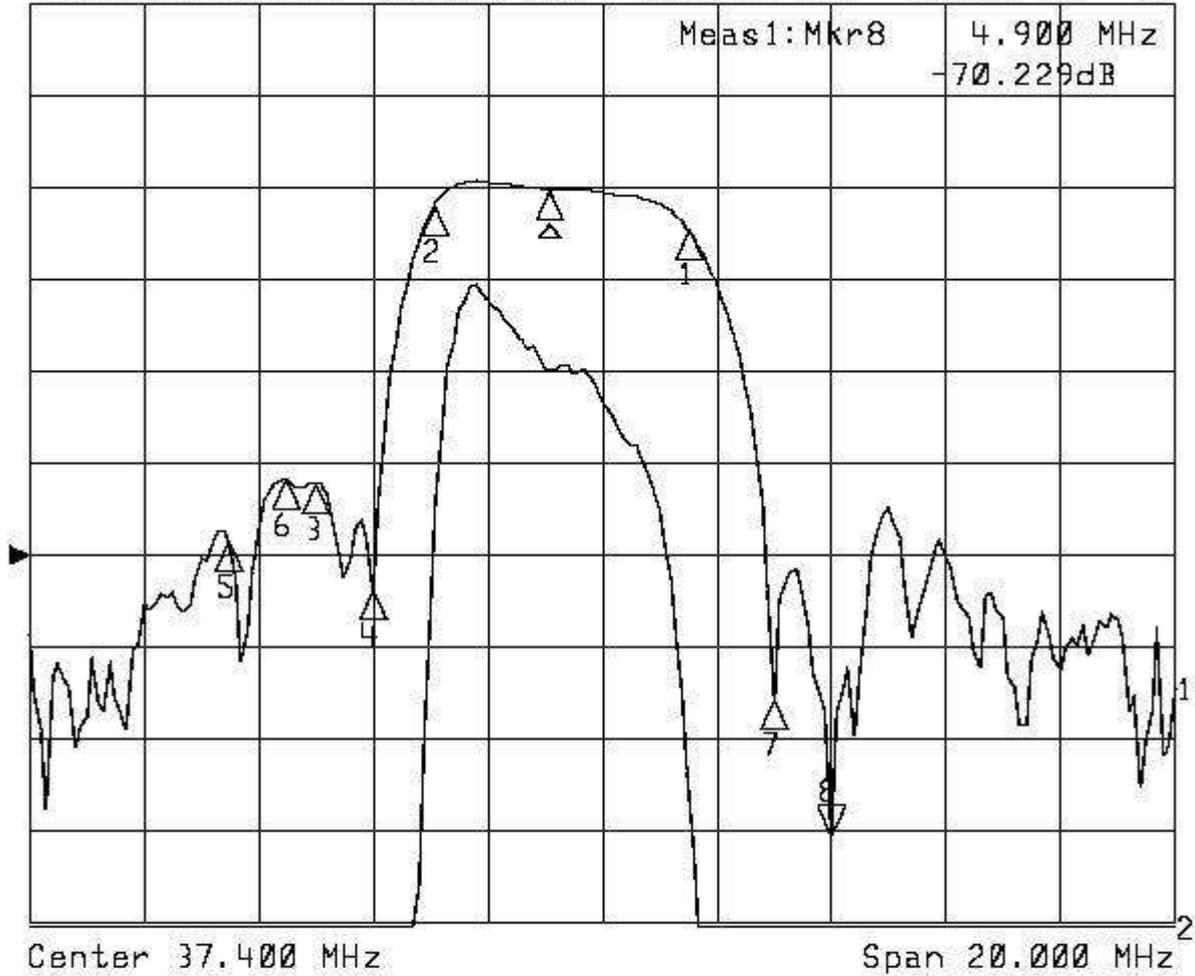

1: Mkr Δ(MHz)	dB	2: Mkr (MHz)	dB
1:	2.4000	-4.330	
2:	-2.0300	-1.742	
3:	-4.1000	-32.016	
4:	-3.1000	-43.693	
5:	-5.6000	-38.304	
6:	-4.6000	-31.529	
7:	3.9000	-55.564	
8>	4.9000	-70.229	

Frequency response of sound channel

►1: Transmission /M Log Mag 10.0 dB/ Ref -55.40 dB
 ►2: Transmission /M Log Mag 2.0 dB/ Ref -18.37 dB

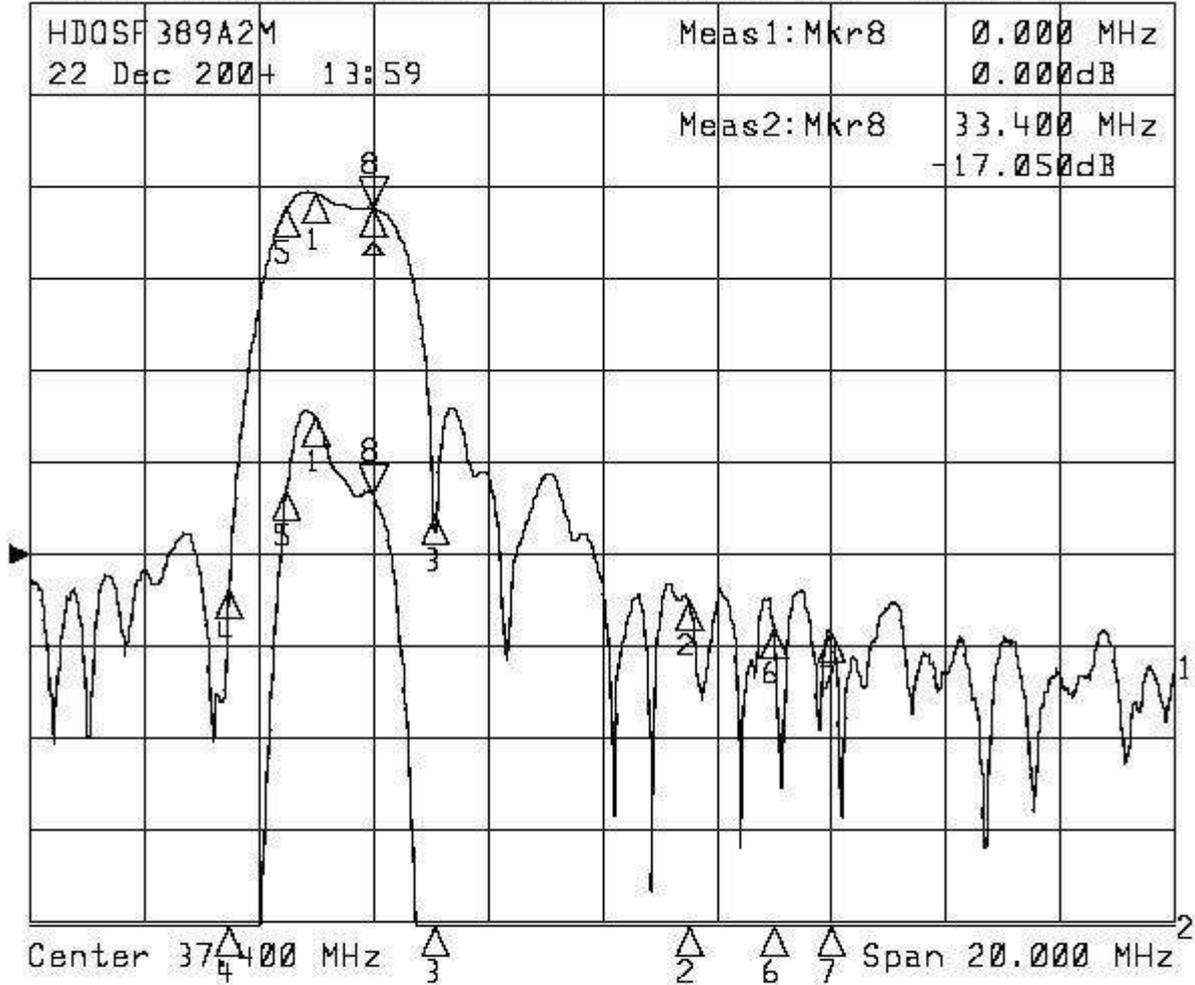

1: Mkr (MHz)	dB	2: Mkr (MHz)	dB
1: -1.0000	1.700	1: 32.4000	-15.360
2: 5.5000	-42.774	2: 38.9000	-59.596
3: 1.0700	-33.458	3: 34.4700	-50.508
4: -2.5000	-41.431	4: 30.9000	-58.420
5: -1.5000	0.094	5: 31.9000	-16.950
6: 7.0000	-45.594	6: 40.4000	-62.702
7: 8.0000	-46.050	7: 41.4000	-63.156
8> 0.0000	0.000	8> 33.4000	-17.050