



1      2      3      4      5      6      7      8

## SPECIFICATION

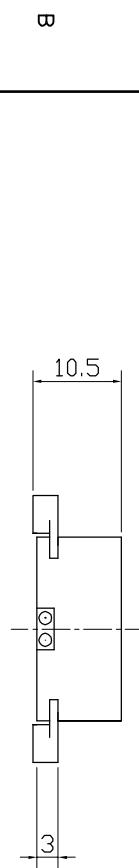

A	
B	
C	
D	
E	
F	

- 1.Rated Voltage ..... 6VDC
  - 2.Operating Voltage ..... 4~8VDC
  - 3.Max.Rated Current ..... 15mA at 6VDC
  - 4.Resonant Frequency ..... 4.8±0.5KHz
  - 5.Min.Sound Pressure Level..... 85dB at 6VDC/30cm
  - 6.Tone Nature ..... Continuous
  - 7.Shell Material ..... ABS
  - 8.Operating Temperature ..... -20~+60°C
  - 9.Store Temperature ..... -30~+70°C
  - 10.Weight ..... 6g
- Red(红).....Positive(+)  
Black(黑).....Negative(-)

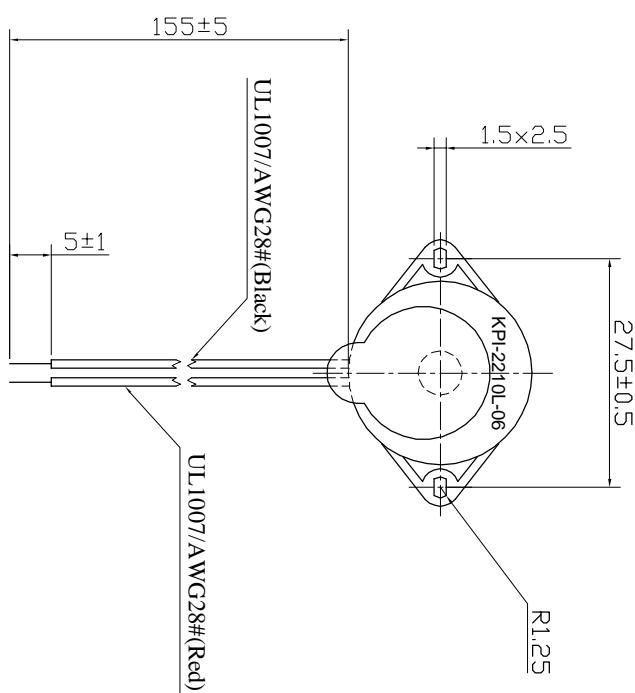

KEPO NINGBO KEPO ELECTRONIC CO.,LTD	
<a href="http://www.chinacoustic.com">http://www.chinacoustic.com</a>	
No.	DESCRIPTION
	APPROVALS
VOLANTENUNGEN XX = XXX = WGT. 2.0 g NOTES: -1°	DRAWN
TEST ANGLE REDUCTION	CHECKED
APPROVED	060123
SCALE	1.1
SHEET	
VER	

Piezo Buzzer QUARTZ-1 LTD  
KPI-2210L-06-1872

F