

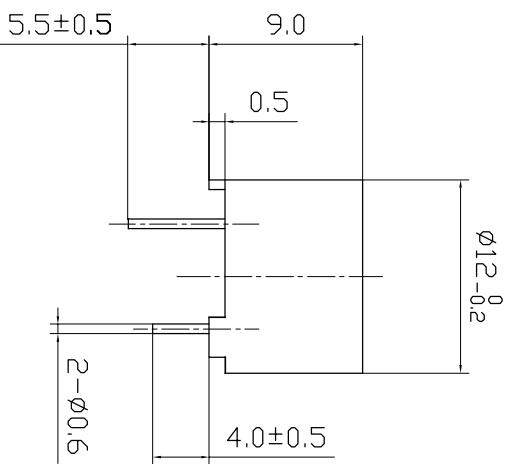


# SPECIFICATION

- 1. Rated Voltage ..... 1.5V
- 2. Operating Voltage ..... 1~2V
- 3. Max. Rated Current ..... 30mA
- 4. Coil Resistance ..... 16±2Ω
- 5. Coil Impedance ..... 40Ω
- 6. Min. Sound Pressure Level ..... 75dB/10cm
- 7. Resonant Frequency ..... 2600Hz
- 8. Case Material ..... PBT
- 9. Operating Temperature ..... -20~+70℃
- 10. Store Temperature ..... -30~+80℃
- 11. Weight ..... 2g



No.	DESCRIPTION	APPROVED	DATE	<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a> <b>Magnetic Buzzer</b> <b>KPM-1201A3</b>		
FORMING INSTRUCTIONS		APPROVALS	DATE			
X	DRAWN	CHECKED	UNIT	mm		
X	90° FORMER		SCALE	NOT TO SCALE		
X	TEST INSTRUCTIONS	APPROVED	05.08.01	KP3,8,40,679		
				SHEET	VER 1.0	