



SPECIFICATION

- 1. Rated Voltage 1.5 VDC
- 2. Operating Voltage 1~2 VDC
- 3. Max. Rated Current 20mA/1.5VDC
- 4. Min. Sound Pressure Level 75dB/10cm
- 5. Resonant Frequency 2300Hz±300
- 6. Response Time 50ms
- 6. Case Material PBT
- 7. Operating Temperature -20~+70°C
- 8. Store Temperature -30~+80°C
- 9. Weight 2g

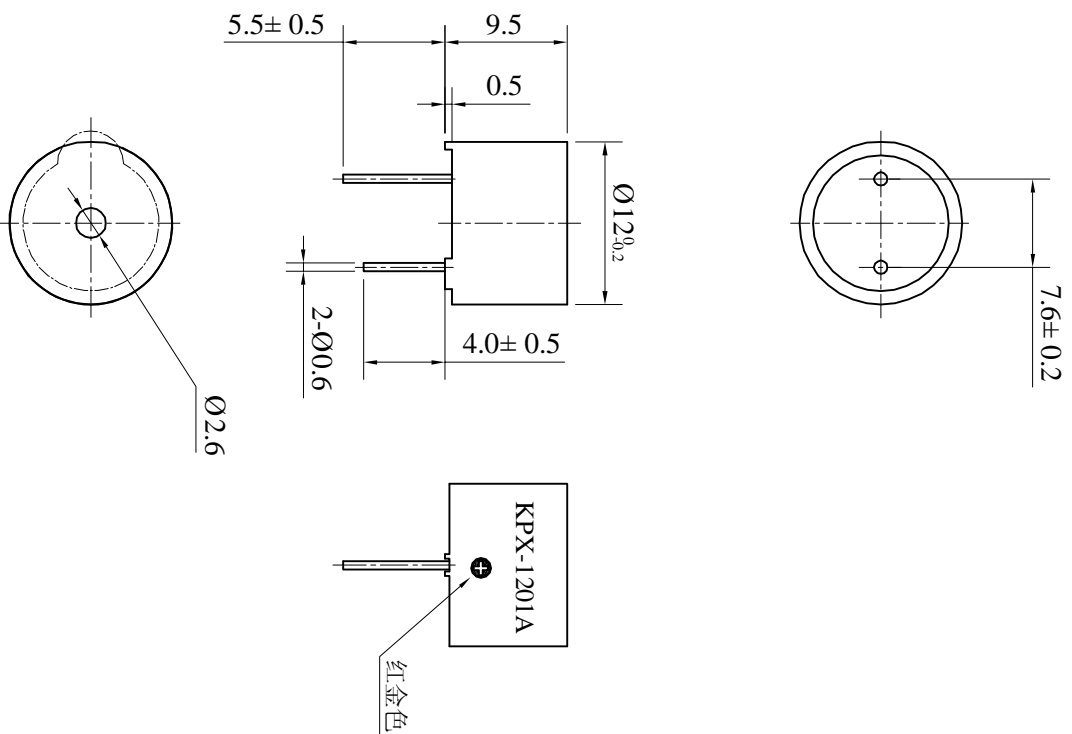

No.	DESCRIPTION	APPROVED	DATE	KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com Magnetic Buzzer KPX-1201A			
FORMING INSTRUCTIONS		APPROVALS	DATE				
X	DATE	DRAWN		UNIT	DRAWING		
X		CHECKED		mm	KP3,840,686		
X		APPROVED		SCALE	SHEET		
FIRST ANGLE ISOMETRIC			05.02.26	NOT TO SCALE	VER 1.1		