


# SPECIFICATION

- 1. Rated Voltage ..... 9 VDC
- 2. Operating Voltage ..... 7~12 VDC
- 3. Max. Rated Current ..... 30mA/9VDC
- 4. Min. Sound Pressure Level ..... 85dB/10cm
- 5. Resonant Frequency ..... 2300±300HZ
- 6. Response Time ..... 50ms
- 6. Case Material ..... PBT
- 7. Operating Temperature ..... -20~+70°C
- 8. Store Temperature ..... -30~+80°C
- 9. Weight ..... 2g

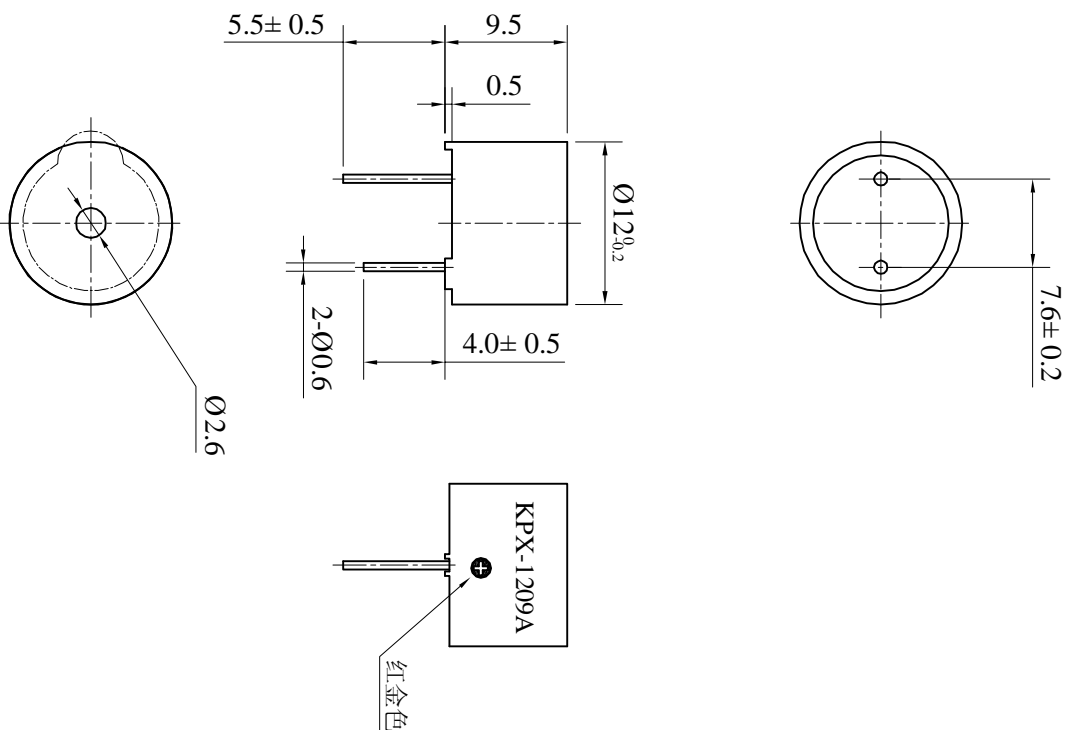

No.	DESCRIPTION	APPROVED	DATE	<div style="text-align: center;"> <b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD  <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a> </div> <div style="text-align: center;"> <b>Magnetic Buzzer</b>  <b>KPX-1209A</b> </div> <div style="display: flex; justify-content: space-between;"> <span>UNIT: mm</span> <span>DWGNO: KP3.8.40.690</span> </div>		
<small>FORMING PRECISION X X X X 90° FORMER ±.2° TAPER ANGLES: 100/100/100</small>		APPROVALS	DATE			
		CHECKED				
		APPROVED				
			05.02.26	SCALE: NOT TO SCALE	SHEET	VER: 1.1