


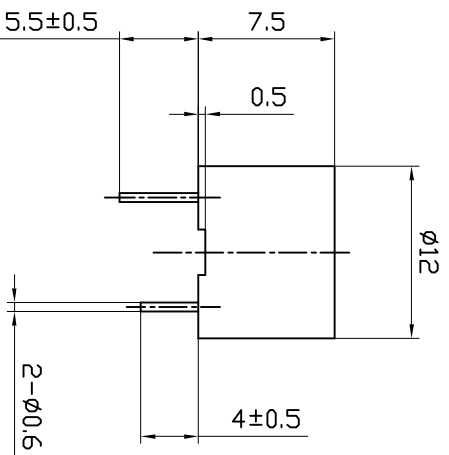


SPECIFICATION

- 1. Rated Voltage 1.5VDC
- 2. Operating Voltage 1~2VDC
- 3. Max Rated Current 30mA/1.5VDC
- 4. Min. Sound Pressure Level 75dB/10cm
- 5. Resonant Frequency 2300±500Hz
- 6. Response Time 50ms
- 7. Case Material PBT
- 8. Operating Temperature -20~+70°C
- 9. Store Temperature -30~+80°C
- 10. Weight 2g



Compliance with ROHS			
KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
Magnetic Buzzer PHP KPY-G1201UB-2235			
No.	DESCRIPTION	APPROVED	DATE
1. 90° FORWARD 2. 90° FORWARD 3. 90° FORWARD 4. 90° FORWARD 5. 90° FORWARD 6. 90° FORWARD 7. 90° FORWARD 8. 90° FORWARD 9. 90° FORWARD 10. 90° FORWARD			
DRAWN		APPROVALS	
CHECKED		DATE	
DRAWN		DATE	
CHECKED		DATE	
APPROVED		DATE	
UNIT		SCALE	
mm		NOT TO SCALE	
DRAWING		SHEET	
OEM2235R		VER 1.0	