

# PS-9627

Product Category: Electromagnetic buzzer


Picture:



## Curve

Frequency Response Curve


tested by B&k

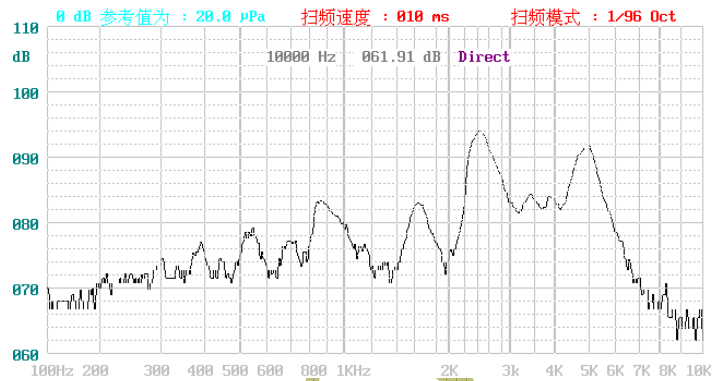

## Specification

Type	Unit	PS-9627-1	PS-9627-3	PS-9027-5
Rated Voltage 额定电压	v	1.5	3.6	5
Operating Voltage 操作电压	v	1~2	2.5~4.5	4~7
Rated Current(max) 额定电流	mA	80	70	70
Sound output at 10cm 输出声压	dB	80	85	85
Rate Frequency 额定频率	Hz		2700	
Coil Resistance 线圈电阻		5.5 ± 1	16 ± 3	30 ± 5
Operating temperature 操作温度			-30~+70	
Storage Temperature 存储温度			-40~+85	
Housing material 外壳材料			MPPO	
Weight 重量	g		0.7	

Value Applying at Rated Voltage(resonant frequency, 1/2 duty,square wave)

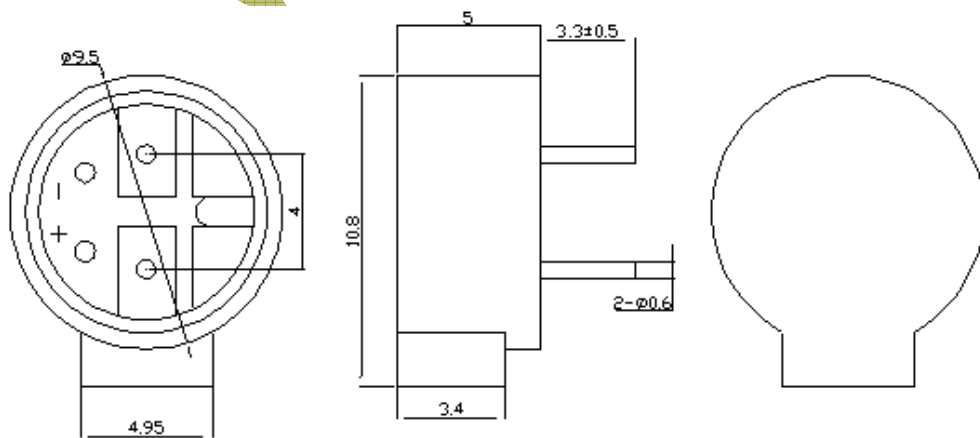

CHANGZHOU WEIHUO ELECTRONICS CO.,LTD.

Tel:+86-0519-85860299 Fax:+86-0519-85863355

http:www.buzzer-china.com E-mail:jones\_wu@buzzer-china.com

Add:No.19 Longwei Road Baizhang, Chunjiang Town, Changzhou Developing Area, Jiangsu, P.R .China.