


SPECIFICATION

Sound

- 1. Resonant Frequency 2.4 ± 0.5 kHz
- 2. Static Capacitance $140000 \pm 30\%$ (pF) at 120 Hz
- 3. Resonant Impedance 150 Max (Ω)
- 4. Input Voltage 30 Vp-p Max
- 5. Operating Temperature -20 to $+70$ ($^{\circ}\text{C}$)
- 6. Storage Temperature -20 to $+80$ ($^{\circ}\text{C}$)
- 7. Metal Material Brass

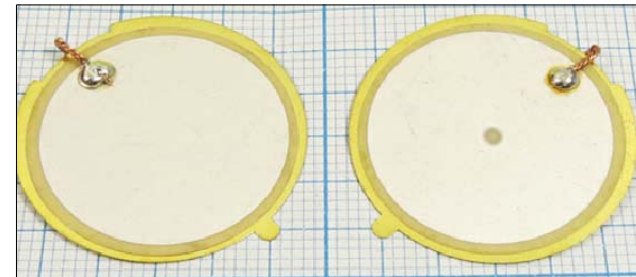

技术要求:

- 1, 带标记点一面为正极面, 标记点直径1.0mm
- 2, 银层上焊点直径控制在 2.3 ± 0.5 mm,
- 3, 8x2x0.05 (编织线, braided wire); L=55±5mm,

				NINGBO VOISE ELECTRONICS CO.,LTD http://www.nbvoise.com	
No.	DESCRIPTION	APPROVED	DATE	Piezoelectric Element VS27T24ASL	
TOLERANCES UNLESS NOTED OTHERWISE X ± XX ± XXX ± 90° FORMED +2° ANGLES -2°		APPROVALS	DATE		
FIRST ANGLE PROJECTION		DRAWN		UNIT	DWG NO.
		CHECKED		mm	VS20190223021
		APPROVED	19.02.14	SCALE	SHEET
					VER 1.0