

SPECIFICATION

FOR APPRONAL

Customer : _____

Product Name : Dynamic Speaker _____

Model Name : VS50x30R8F600P3L80 _____

Drawing No. : VS20251210012 _____

Signature of Voise

Approved by	Checkde by	Issued by	Date



福爱斯电子有限公司
VOISE ELECTRONICS CO.,LTD.

Address:No 96 Mogao Dongqian Lake Industial Area ningbo, China,

Tel:0086-0574-87773030;Fax:0086-0574-87471600 P.C.315121

<http://www.nbvoise.com> Email:sales@nbvoise.com

Specification for Dynamic Speaker		Page	2/8
Model No.: VS50x30R8F600P3L80		Revision No.	1.0
		Drawing No.	VS20251210012

Table of contents

1. Revision
2. Scope
3. General Characteristics
4. Electrical and Acoustic Characteristics.
5. Reliability Test
6. Measurement Method & Frequency Response curve
7. Mechanical layout
8. Dimensions
9. Packing

1. Revision

Rev.No.	Date	Page	Description of Revision
1.0	2025/12/10		Preliminary

Specification for Dynamic Speaker		Page	3/8
Model No.: VS50x30R8F600P3L80		Revision No.	1.0
		Drawing No.	VS20251210012

2. Scope

This document contains required environmental,electrial,acoustic,mechanical,package and reliability test requirement

3. General Characteristics

- 2.1 Out-Diameter : 50x30 mm
- 2.2 Height : 12 mm
- 2.3 Weight : 12.5 g
- 2.4 Operating Temperature : -20~+60℃ without loss of function
- 2.5 Store Temperature : -30~+70℃ without loss of function

4. Electrical and Acoustic Characteristics.

Test condition :15 ~ 35 °C Temp., 25% ~ 75% RH,86~106 kPa Refer to IEC60268-1

No	Items	Specification
1	Impedance	8 Ω ± 15% (1Vrms at 0.8KHz)
2	Sound Pressure Level	87 dB ± 3dB (0.1m/0.1w at 0.6,0.8,1.0,1.2kHz Average)
3	Resonance Frequency(fo)	600 Hz ± 20% at 1V
4	Frequency Range	fo ~20KHz
5	Input Power	Rated 3 W / Max. 3.5 W a minute
6	Distortion	Less than 5% at 1kHz 1.0W
7	Buzz and Rattle	Should not be audible buzzes,rattles when the 4.9V sine wave signal swept at frequency range.
8	Polarity	When a ppsitive DC current is applied to the voice coil terminal marked (+) , the diaphragm shall move to forward.
9	Waterproof level	IP40

Specification for Dynamic Speaker		Page	4/8
Model No.: VS50x30R8F600P3L80		Revision No.	1.0
		Drawing No.	VS20251210012

5. Reliability Test



After test(1~7item), the speaker S.P.L . difference shall be within $\pm 3\text{dB}$, and the appearance not exist any change to be harmful to normal operation

No	Items	Specification
1	High Temp.Test	Keep 100 hours at $+60\pm 3\text{ }^{\circ}\text{C}$,and leave 4 houres in normal temperature and then check.
2	Low Temp.Test	Keep 100 hours at $-30\pm 3\text{ }^{\circ}\text{C}$,and leave 4 houres in normal temperature and then check.
3	Humidity Test	Keep 100 hours at $-30\pm 3\text{ }^{\circ}\text{C}$,relative humidity 85 to 90% and leave 4 houres in normal temperature and then check.
4	Thermal Shock Test	Each temperature cycle shall consist of 2 hours at $+25\pm 3\text{ }^{\circ}\text{C}$ followed by 2hours at $+60\pm 3\text{ }^{\circ}\text{C}$,and followed by 2hours at $-30\pm 3\text{ }^{\circ}\text{C}$ with a 20 to 40 minutes transition time between each 2 temperature extremes. The test duration is for 10 cycle.
5	Vibration Test	Being applied vibration of amplitude of 1.5mm with 10-55-10Hz band of vibration frequency,X.Y.Z.3 direction.2 hours each, total 6 hours.
6	Drop Test	Free drop fram 1.0 meter height to a board 20mm thick hard wood board. and be nothing mechanical damage. tatol 6 times.
7	Load test	Loading white noise with input rate power for 100 hours, then placed in natural condition for 1 hour and then check.
8	Insulation test	When they are measured with DC 100V the insulation resistance between v.c. terminal and frame must be more than 1 M Ω

Specification for Dynamic Speaker		Page	5/8
Model No.: VS50x30R8F600P3L80		Revision No.	1.0
		Drawing No.	VS20251210012


6. Measurement Method & Frequency Response curve

Standard test condition of speaker

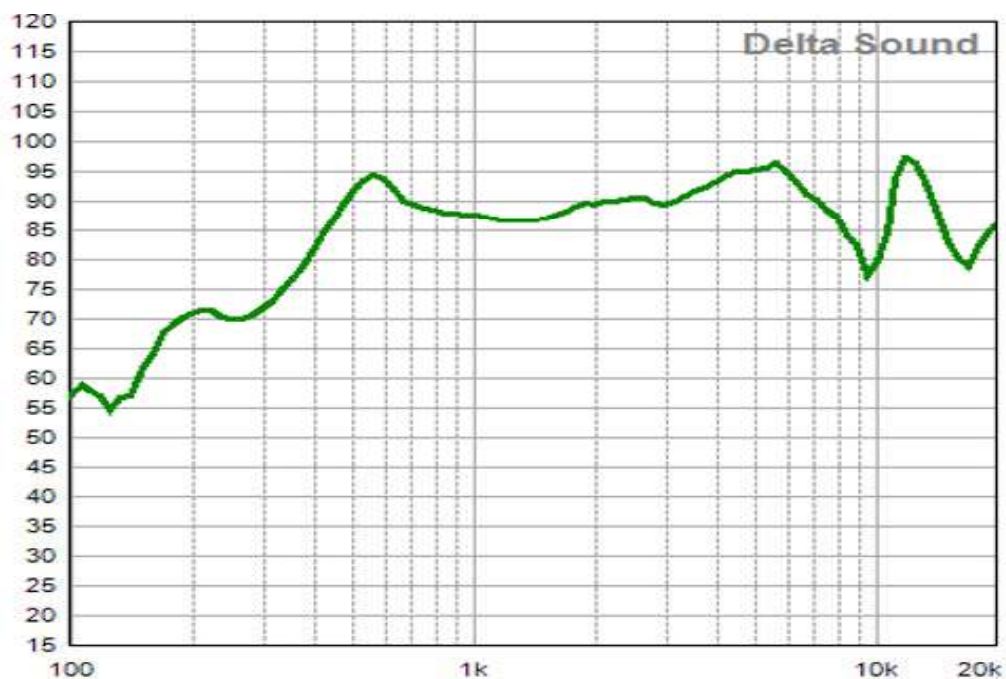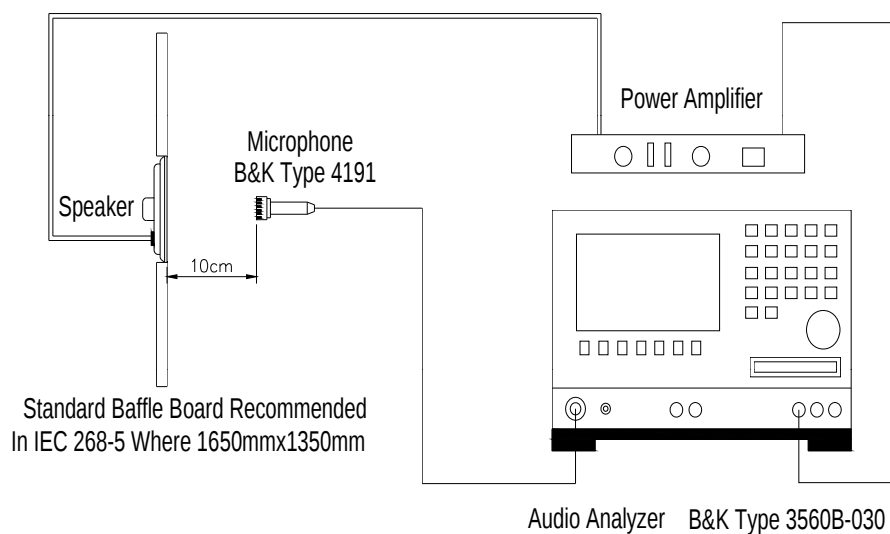

Specification for Dynamic Speaker		Page	6/8
Model No.: VS50x30R8F600P3L80		Revision No.	1.0
		Drawing No.	VS20251210012


7. Mechanical layout

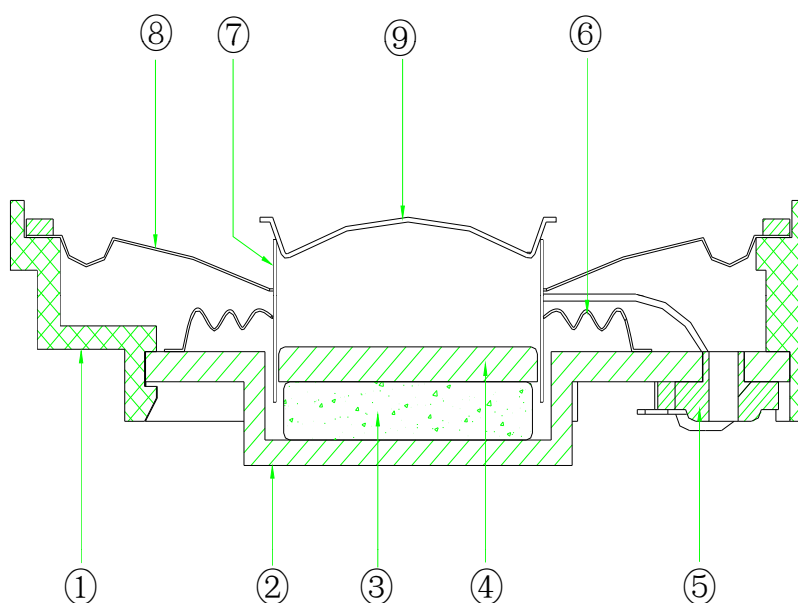


9	Dust cap	1	PAPER	
8	Diaphragm	1	Cloth + PAPER	
7	Voice Coil	1	Kapton+Copper	
6	Damper	1	CLOTH	
5	Terminal	1	MylarFe+PAPER	
4	Plate	1+1	SPCC	
3	Magnet	1	Nd-Fe-B	
2	Yoke	1	SPCC	
1	Frame	1	ABS	
No.	Part Name	Q'ty	Material	Remarks

Specification for Dynamic Speaker		Page	7/8
		Revision No.	1.0
		Drawing No.	VS20251210012
Model No.:	VS50x30R8F600P3L80		

8. Dimensions

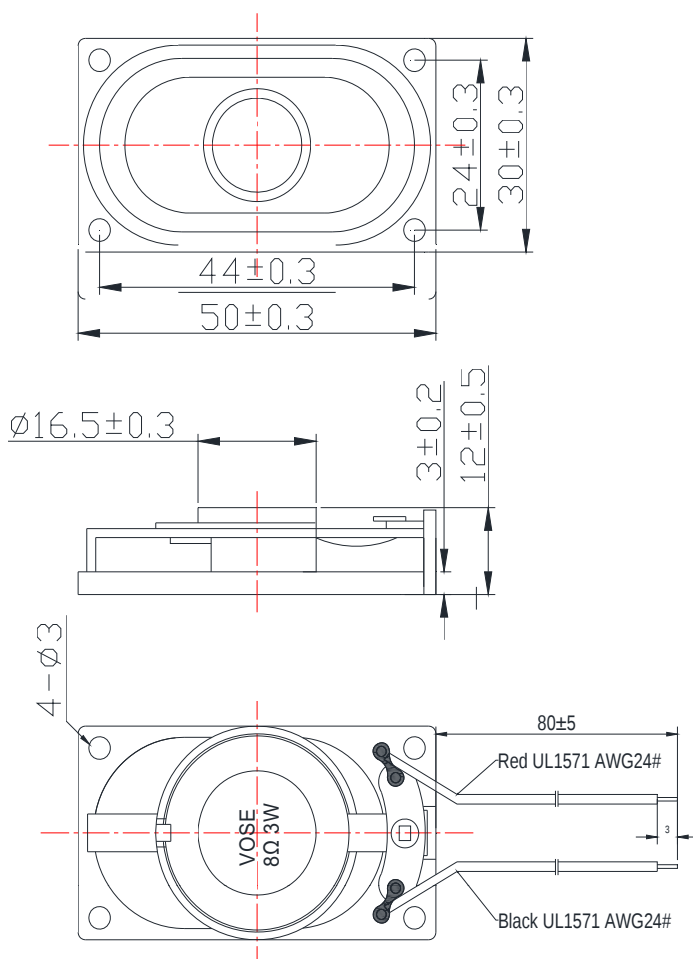

FIRST ANGLE PROJECTION




UNIT : mm

Tolerance : ± 0.2

Specification for Dynamic Speaker		Page	8/8
Model No.: VS50x30R8F600P3L80		Revision No.	1.0
		Drawing No.	VS20251210012

9. Packing

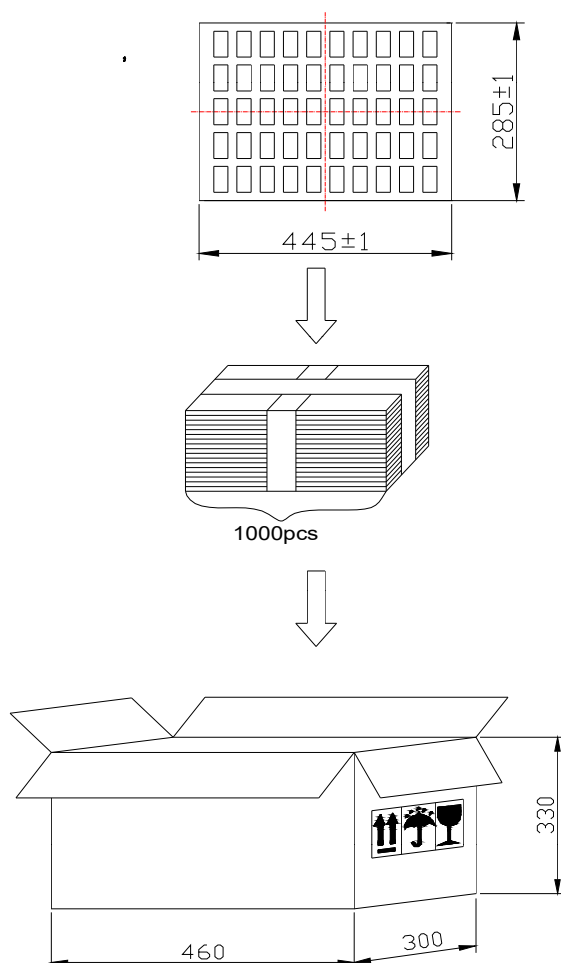

50 pcs per tray
14 trays for unit
Total:700 pcs per carton
Size:46×30×33cm