

# SPECIFICATION

## FOR APPRONAL

Customer : \_\_\_\_\_

Product Name : Magnetic Buzzer(Self-drive)

Model Name : VSX1275V5F23

Drawing No. : VS20150326011

### Signature of Voise

Approved by	Checkde by	Issued by	Date

 福爱斯电子有限公司  
VOISE ELECTRONICS CO.,LTD.

Address:No 96 Mogao Dongqian Lake Industial Area ningbo,China,  
Tel:0086-0574-87773030;Fax:0086-0574-87471600 P.C.315121  
<http://www.nbvoise.com> Email:sales@nbvoise.com



<b>Specification for Magnetic Buzzer</b>		Page	3/7
		Revision No.	1.0
Model No.:	VSX1275V5F23	Drawing No.	VS20150326011

## 2. Scope

This product specification is applied to the Magnetic Buzzer in alarm systems. Please contact us when using this product for any other applications than described in the above.

## 3. General Characteristics

- 3.1 Out-Diameter : 12 mm
- 3.2 Height : 7.5 mm
- 3.3 Weight : 2 g
- 3.4 Operating Temperature : -20~+70°C without loss of function
- 3.5 Store Temperature : -30~+85°C without loss of function

## 4. Electrical and Acoustic Characteristics.

Test condition :15 ~ 35 °C Temp., 25% ~ 75% RH,86~106 kPa Refer to IEC60268-1

No	Items	Specification
1	Rated Voltage	5V DC
2	Working Voltage	4-8V DC
3	Max Rated Current	30mA/5VDC
4	Min Sound Pressure Level	85dB/5VDC/10cm
5	Resonant Frequency	2.3±0.4KHz
6	Tone Nature	Continuous
7	Housing Material	PBT
8	Color	Black

<b>Specification for Magnetic Buzzer</b>		Page	4/7
		Revision No.	1.0
Model No.:	VSX1275V5F23	Drawing No.	VS20150326011



## 5. Reliability Test

After test(1~7item), the buzzer S.P.L . difference shall be within  $\pm 8\text{dB}$ , and the appearance not exist any change to be harmful to normal operation

No	Items	Specification
1	High Temp. Test	After being woked in a chamber with $+70\pm 2\text{ }^\circ\text{C}$ for 2h and then being placed in natural condition for 2h, and then check.
2	Low Temp. Test	First being worked in a chamber with $-20\pm 2\text{ }^\circ\text{C}$ for 2h and then being placed in natural condtion for 2h, and then check.
3	Humidity Test	After being placed in a chamber with 90 to 95%R.H. at $+40\pm 2\text{ }^\circ\text{C}$ for 2 h and then being placed in natural condition for 2h ,and then check.
4	Thermal Shock Test	After being worked in a chamber at $+70\pm 2\text{ }^\circ\text{C}$ for 1 hour, then sounder shall be placed in a chamber at $-20\pm 2\text{ }^\circ\text{C}$ for 1 hour(1 cycle is the below diagram). The test duration is for 10 cycle. fter being placed in natural condition for 1 hour.and then check.
5	Vibration Test	Being applied vibration of amplitude of 1.5mm with 10-30Hz band of vibration frequency,X.Y.Z.3 direction.2 hours each, total 6 hours.
6	Drop Test	Free drop fram 1.0 meter height to a board 20mm thick hard wood board. and be nothing mechanical damage. tatol 6 times.
7	Solderability	Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of $+260\pm 5\text{ }^\circ\text{C}$ for $3\pm 0.5$ seconds.
8	Terminal Strength Pulling	The force 10 seconds of 9.8N is applied go each terminal in axial direction.


Specification for Magnetic Buzzer		Page	5/7
		Revision No.	1.0
Model No.:	VSX1275V5F23	Drawing No.	VS20150326011

## 6. Measurement Method & Frequency Response curve

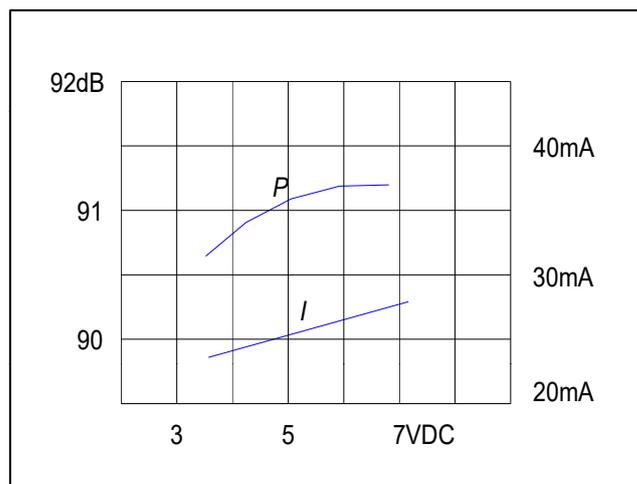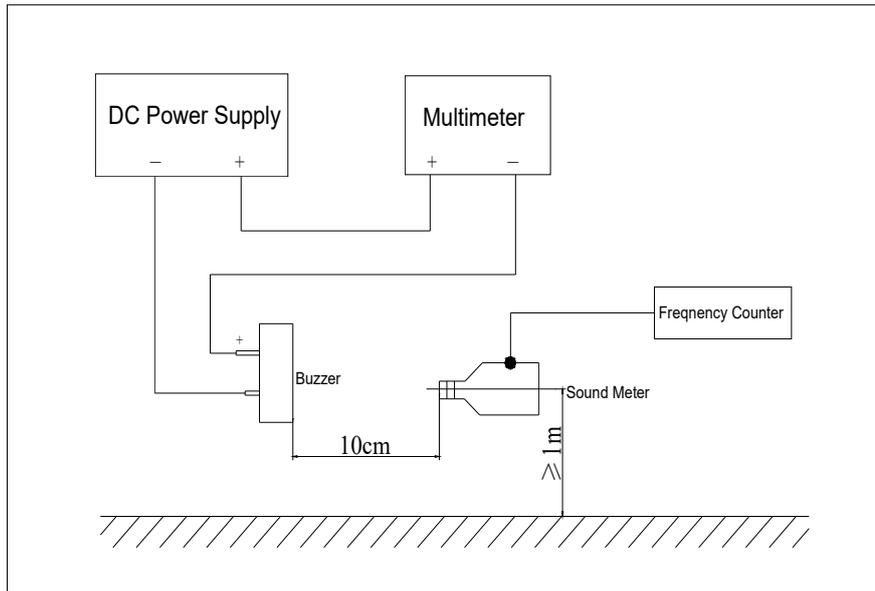


Specification for Magnetic Buzzer		Page	6/7
		Revision No.	1.0
Model No.:	VSX1275V5F23	Drawing No.	VS20150326011

## 7. Dimensions

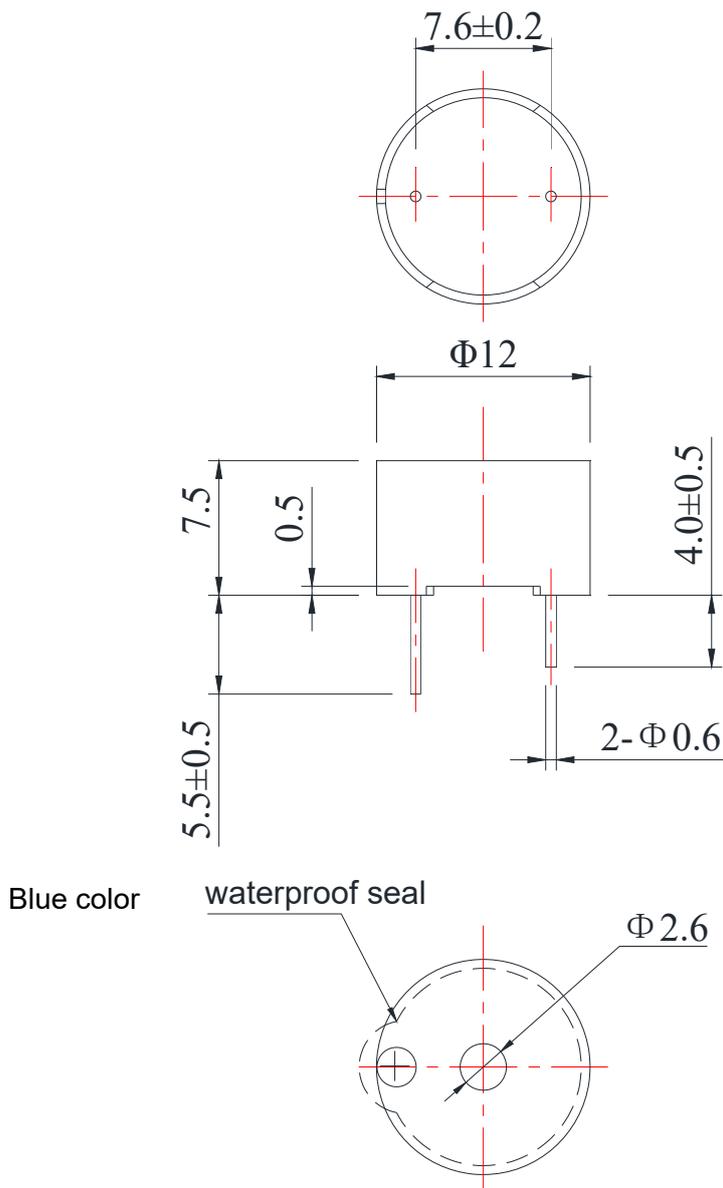

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance :  $\pm 0.2$

<b>Specification for Magnetic Buzzer</b>		Page	7/7
		Revision No.	1.0
Model No.:	VSX1275V5F23	Drawing No.	VS20150326011

## 8. Packing



1pcs



1tray=100pcs



1carton=6000pcs



1box=1000pcs

100 pcs per tray  
 5 trays for unit, 12 units per carton  
 Total:6000 pcs per carton  
 Size:425x400x315mm