ASSP for Mobile Telephone

VCO (230 to 2300 MHz)

VC-50 Series


DESCRIPTION

With excellent C/N characteristics and low current consumption, this VCO series is ideal for CDMA, PCS, PHS and GSM mobile communication equipment. The VC-50 series can be used in any frequency band in the 230MHz to 2300MHz range. The device utilizes FUJITSU MEDIA DEVICE's high-frequency design technology, high-density mounting technology, and frequency adjustment technology to provide a high level of reliability in addition to high performance and small size.


FEATURES

- Superior noise characteristics (C/N, S/N)
- · High level of stability in response to ambient temperature and load variations
- FUJITSU MEDIA DEVICE's proprietary fabrication process provides the uniformity of the central frequency distribution
- Small size, light-weight, slim-package : $6.0 \times 6.0 \times 1.8$ mm (Typ.)
- · SMD-type taping specifications suitable for automatic mounting and reflow soldering

PACKAGE

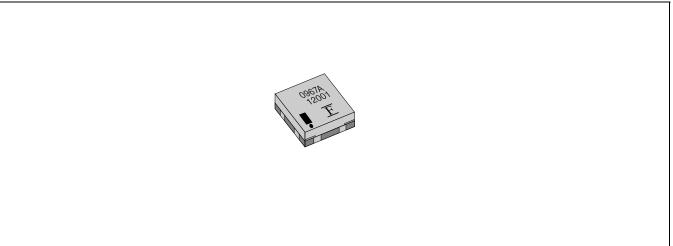

■ PIN ASSIGNMENT

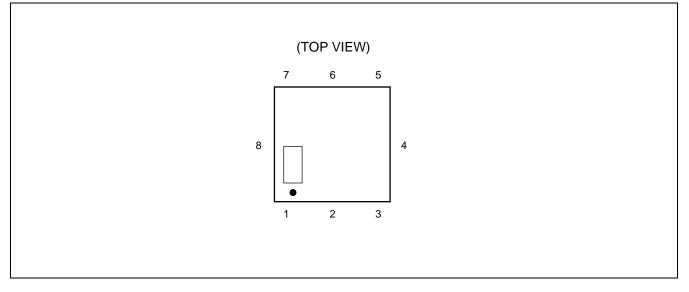

■ PIN DESCRIPTION

Pin No.	Symbol	Description
1	Vt	Control voltage
2	GND	GND
3	Vcc	Power supply voltage
4	GND	GND
5	OUT	Output
6	GND	GND
7	GND	GND
8	GND	GND

■ PRODUCT LINEUP (STANDARD MODELS)

System	Center Frequency (MHz)	Band Width (MHz)	Power Supply Voltage (V)	Part Number
	967	±13	3.0 ± 0.25	VC-3R0A50-0967A
CDMA	991	±13	2.5 ± 0.15	VC-2R5A50-0991
	1035	±15.5	2.55 ± 0.15	VC-2R5A50-1035
PCS	1750	±30	3.0 ± 0.16	VC-3R0A50-1750
K-PCS	1635	±15	2.7 ± 0.15	VC-2R7A50-1635
K-F03	1055	±15	3.0 ± 0.15	VC-3R0A50-1635S
GSM	897	±17.5	2.8 ± 0.1	VC-2R8A50-0897F
0.0101	1171	±35	2.8 ± 0.07	VC-2R8A50-1171
GSM/DCS	1360	±80	2.85 ± 0.15	VC-2R8A50-1360
PHS	1652	±20	2.7 ± 0.1	VC-2R7A50-1652
PHS	1668	±18.3	3.0 ± 0.2	VC-3R0A50-1668N

ELECTRICAL CHARACTERISTICS

1. For CDMA (Part number : VC-3RA50-0967A)

Absolute Maximum Ratings

Parameter	Symbol	Rat	Unit	
Faraneter	Symbol	Min.	Max.	Onit
Input DC voltage	Vcc	—	+3.25	V
Control voltage	Vt	—	+3.25	V
Operating temperature	Та	-30	+80	°C
Storage temperature	Tstg	-40	+85	°C
Storage humidity	Hstg	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Electrical Characteristics

 $(Ta = +25^{\circ}C \pm 3^{\circ}C)$

Parameter	Symbol	Conditions		Value		Unit
Farameter	Symbol	Conditions	Min.	Тур.	Max.	Onit
Current consumption	Icc	$V_{CC} = 3.0 V, Vt = 1.7 V$	_		6.4*	mA
Frequency	fmin	Vcc = 3.0 V, Vt = 0.7 V			954.0*	MHz
Frequency	fmax	Vcc = 3.0 V, Vt = 2.7 V	980.0*			MHz
Control voltage sensitivity	kv	(fmax – fmin) /2.0	18.0	23.0	28.0	MHz/V
Oscillator output	Po	Vcc = 3.0 V, Vt = 1.7 V	-6.0*		1.0*	dBm
	C/N	Vcc = 3.0 V, Vt = 1.7 V, Offset = 1 kHz, BW = 1 Hz	70.0*		_	dBc/Hz
ON		Vcc = 3.0 V, Vt = 1.7 V, Offset = 10 kHz, BW = 1 Hz	100.0*		_	dBc/Hz
C/N		Vcc = 3.0 V, Vt = 1.7 V, Offset = 30 kHz, BW = 1 Hz	110.0*		_	dBc/Hz
		Vcc = 3.0 V, Vt = 1.7 V, Offset = 60 kHz, BW = 1 Hz	115.0*		_	dBc/Hz
Higher harmonics	Hs	Vcc = 3.0 V, Vt = 1.7 V, 2nd, 3rd	_		-10.0*	dBc
Spurious	S₽	Vcc = 3.0 V, Vt = 1.7 V			-70.0*	dBc
Power supply variation	Push	$V_{CC} = 3.0 \text{ V} \pm 0.25 \text{ V},$ Vt = 1.7 V	_		±800*	kHz
Load variation	Pull	Vcc = 3.0 V, Vt = 1.7 V, VSWR = 2 ALL PHASE	_		±1000	kHz
Temperature drift	Td	Ta = +25 °C ± 55 °C			±3000*	kHz

* : Ta = -30° C to $+80^{\circ}$ C

2. For CDMA (Part number : VC-2R5A50-0991)

Absolute Maximum Ratings

Parameter	Symbol	Ra	Unit	
Faraneter	Symbol	Min.	Max.	Onit
Input DC voltage	Vcc	—	+6.0	V
Control voltage	Vt	—	+10.0	V
Operating temperature	Та	-40	+85	°C
Storage temperature	Tstg	-50	+125	°C
Storage humidity	Hstg	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Electrical Characteristics

 $(Ta = -40^{\circ}C \text{ to } +85^{\circ}C)$

Parameter	Symbol	Conditions		Value		Unit
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Current consumption	Icc	Vcc = 2.5 V , Vt = 1.4 V			8.0 7.0*	mA
Frequency	fmin	$V_{CC} = 2.5 V, Vt = 0.6 V$			978.0	MHz
Frequency	fmax	Vcc = 2.5 V, Vt = 2.2 V	1004.0	—		MHz
Control voltage sensitivity	kv	(fmax – fmin) /1.6	23.0	27.0	31.0	MHz/V
Oscillator output	Po	Vcc = 2.5 V, Vt = 1.4 V	-4.5	-1.5	1.5	dBm
	C/N	V _{cc} = 2.5 V, Vt = 1.4 V, Offset = 20 kHz, BW = 1 Hz	107.0 108.0*			dBc/Hz
C /N		V _{cc} = 2.5 V, Vt = 1.4 V, Offset = 25 kHz, BW = 1 Hz	110.0 111.0*			dBc/Hz
C/N		Vcc = 2.5 V, Vt = 1.4 V, Offset = 60 kHz, BW = 1 Hz	118.0			dBc/Hz
		V _{cc} = 2.5 V, Vt = 1.4 V, Offset = 900 kHz, BW = 1 Hz	140.0			dBc/Hz
Higher harmonics	Hs	$V_{CC} = 2.5 V, Vt = 1.4 V,$ Up to 3rd			-15.0	dBc
Spurious	S₽	$V_{CC} = 2.5 V, Vt = 1.4 V,$ Up to 3 GHz			-70.0	dBc
Power supply variation	Push	$V_{CC} = 2.5 V \pm 0.15 V,$ Vt = 1.4 V			±500	kHz
Load variation	Pull	Vcc = 2.5 V, Vt = 1.4 V, VSWR = 2 ALL PHASE			±500	kHz

* : Ta = +25 °C \pm 3°C

3. For CDMA (Part number : VC-2R5A50-1035)

Absolute Maximum Ratings

Paramatar	Symbol	Ra	Unit	
Parameter	Symbol	Min.	Max.	Unit
Input DC voltage	Vcc	—	+6.0	V
Control voltage	Vt	—	+10.0	V
Operating temperature	Та	-40	+85	°C
Storage temperature	Tstg	-50	+125	°C
Storage humidity	Hstg	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Electrical Characteristics

 $(Ta = -40^{\circ}C \text{ to } +85^{\circ}C)$

Parameter	Symbol	Conditions		Value			
Farameter	Symbol	Conditions	Min.	Тур.	Max.	Unit	
Current consumption	Icc	$V_{CC} = 2.55 \text{ V}, \text{ Vt} = 1.35 \text{ V}$	—	—	10.0	mA	
Frequency	fmin	$V_{CC} = 2.55 V, Vt = 0.5 V$		_	1019.0	MHz	
Frequency	fmax	Vcc = 2.55 V, Vt = 2.2 V	1050.0	_	_	MHz	
Control voltage sensitivity	kv	(fmax – fmin) /1.7, Vt = 1.35 V	24.0	28.0	32.0	MHz/V	
Oscillator output	Po	Vcc = 2.55 V, Vt = 1.35 V	-3.0	0.0	3.0	dBm	
	C/N	Vcc = 2.55 V, Vt = 1.35 V, Offset = 625 kHz , BW = 1 Hz	137.0			dBc/Hz	
C/N		Vcc = 2.55 V, Vt = 1.35 V, Offset = 1.25 MHz , BW = 1 Hz	143.0	_		dBc/Hz	
Higher harmonics	Hs	Vcc = 2.55 V, Vt = 1.35 V, 2nd, 3rd, 4th		_	-15.0	dBc	
Spurious	S₽	Vcc = 2.55 V, Vt = 1.35 V, Up to 3 GHz	—		-70.0	dBc	
Power supply variation	Push	$V_{CC} = 2.55 \text{ V} \pm 0.15 \text{ V},$ Vt = 1.35 V	_	—	±500	kHz	
Load variation	Pull	Vcc = 2.55 V, Vt = 1.35 V, VSWR = 2 ALL PHASE			±500	kHz	

4. For PCS (Part number : VC-3R0A50-1750)

• Absolute Maximum Ratings

Desemptor	Symbol	Ra	Unit	
Parameter	Symbol	Min.	Max.	Unit
Input DC voltage	Vcc	—	+3.2	V
Control voltage	Vt		+3.2	V
Operating temperature	Та	-30	+80	°C
Storage temperature	Tstg	-35	+85	°C
Storage humidity	Hstg	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Electrical Characteristics

 $(Ta = -30^{\circ}C \text{ to } +80^{\circ}C)$

Parameter	Symbol Conditions			Unit		
Farameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Current consumption	Icc	$V_{CC} = 3.0 \text{ V}, \text{ Vt} = 1.65 \text{ V}$	_	—	8.5	mA
Frequency	fmin	$V_{CC} = 3.0 \text{ V}, \text{ Vt} = 0.3 \text{ V}$		_	1720.0	MHz
Frequency	fmax	Vcc = 3.0 V, Vt = 3.0 V	1780.0		—	MHz
Control voltage sensitivity	kv	(fmax – fmin) /2.7	30.0	40.0	50.0	MHz/V
Oscillator output	Po	Vcc = 3.0 V, Vt = 1.65 V	-3.0	0.0	3.0	dBm
C/N	C/N	Vcc = 3.0 V, Vt = 1.65 V, Offset = 100 kHz , BW = 1 Hz	112.0			dBc/Hz
Higher harmonics	Hs	$V_{CC} = 3.0 \text{ V}, \text{ Vt} = 1.65 \text{ V},$ Up to 3rd	_	_	-10.0	dBc
Spurious	Sp	Vcc = 3.0 V, Vt = 1.65 V			-80.0	dBc
Power supply variation	Push	$V_{CC} = 3.0 \text{ V} \pm 0.16 \text{ V},$ Vt = 1.65 V	_	_	±600	kHz
Load variation	Pull	Vcc = 3.0 V, Vt = 1.65 V, VSWR = 2 ALL PHASE			±1200	kHz
Temperature drift	Td	Ta = +25 °C ± 55 °C			±6000	kHz

5. For K-PCS (Part number : VC-2R7A50-1635)

Absolute Maximum Ratings

Parameter	Symbol	Ra	Unit	
	Symbol	Min.	Max.	Unit
Input DC voltage	Vcc		+3.0	V
Operating temperature	Та	-30	+80	°C
Storage temperature	Tstg	-40	+90	°C
Storage humidity	Hstg	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Electrical Characteristics

Bananatan	Quertal Querditions					
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Current consumption	Icc	$V_{CC} = 2.7 \text{ V}, \text{ Vt} = 0.5 \text{ V to } 2.5 \text{ V}$			8.5*	mA
Frequency	fmin	Vcc = 2.7 V, Vt = 0.5 V			1620.0*	MHz
Frequency	fmax	Vcc = 2.7 V, Vt = 2.5 V	1650.0*		—	MHz
Control voltage sensitivity	kv	(fmax – fmin) /2.0	22.0	_		MHz/V
Oscillator output	Po	Vcc = 2.7 V, Vt = 1.5 V	-3.0		—	dBm
	C/N	V _{CC} = 2.7 V, Vt = 1.5 V, Offset = 1 kHz, BW = 1 Hz	70.0			dBc/Hz
C/N		V _{CC} = 2.7 V, Vt = 1.5 V, Offset = 100 kHz, BW = 1 Hz	111.0	_	_	dBc/Hz
		V _{CC} = 2.7 V, Vt = 1.5 V, Offset = 1.25 MHz, BW = 1 Hz	134.0			dBc/Hz
Higher harmonics	Hs	Vcc = 2.7 V, Vt = 1.5 V, 2nd, 3rd	_	_	-10.0	dBc
Power supply variation	Push	$V_{CC} = 2.7 \text{ V} \pm 0.15 \text{ V},$ Vt = 1.5 V		—	±800	kHz
Load variation	Pull	V _{CC} = 2.7 V, Vt = 1.5 V, VSWR = 2 ALL PHASE			±1500	kHz

 $(Ta = +25^{\circ}C \pm 3^{\circ}C)$

* : Ta = -30° C to $+80^{\circ}$ C

6. For K-PCS (Part number : VC-3R0A50-1635S)

Absolute Maximum Ratings

Parameter	Symbol	Rat	Unit	
Farameter	Symbol	Min.	Max.	Onit
Input DC voltage	Vcc	—	+6.0	V
Control voltage	Vt		+6.0	V
Operating temperature	Та	-30	+80	°C
Storage temperature	Tstg	-40	+90	°C
Storage humidity	Hstg	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Electrical Characteristics

 $(Ta = +25^{\circ}C \pm 3^{\circ}C)$

Parameter	Symbol	Conditions		Value		Unit
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Current consumption	lcc	Vcc = 3.0 V, Vt = 1.5 V			8.5	mA
Frequency	fmin	Vcc = 3.0 V, Vt = 0.5 V	_		1620.0	MHz
Frequency	fmax	$V_{CC} = 3.0 \text{ V}, \text{ Vt} = 2.5 \text{ V}$	1650.0	_		MHz
Control voltage sensitivity	kv	(fmax – fmin) /2.0	22.0		_	MHz/V
Oscillator output	Po	Vcc = 3.0 V, Vt = 1.5 V	-3.0			dBm
		Vcc = 3.0 V, Vt = 1.5 V, Offset = 1 kHz, BW = 1 Hz	70.0*		_	dBc/Hz
C/N	C/N	Vcc = 3.0 V, Vt = 1.5 V, Offset = 100 kHz, BW = 1 Hz	111.0*		_	dBc/Hz
		Vcc = 3.0 V, Vt = 1.5 V, Offset = 1.25 MHz, BW = 1 Hz	134.0*		_	dBc/Hz
Higher harmonics	Hs	$V_{CC} = 3.0 \text{ V}, \text{ Vt} = 1.5 \text{ V},$ 2nd, 3rd			-10.0	dBc
Spurious	SP	Vcc = 3.0 V, Vt = 1.5 V	—	_	-70.0*	dBc
Power supply variation	Push	$V_{CC} = 3.0 V \pm 0.15 V,$ Vt = 1.5 V			±500	kHz
Load variation	Pull	Vcc = 3.0 V, Vt = 1.5 V, VSWR = 2 ALL PHASE			±1000	kHz
Temperature drift	Td	Ta = +25 °C ± 55 °C	—		±3000*	kHz

* : Ta = -30° C to $+80^{\circ}$ C

7. For GSM (Part number : VC-2R8A50-0897F)

• Absolute Maximum Ratings

Parameter	Symbol	Ra	l linit	
Parameter	Symbol	Min.	Max.	Unit
Input DC voltage	Vcc	—	+4.0	V
Control voltage	Vt	0	+2.9	V
Operating temperature	Та	-20	+75	°C
Storage temperature	Tstg	-40	+85	°C
Storage humidity	Hstg	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Electrical Characteristics

 $(Ta = +25^{\circ}C \pm 3^{\circ}C)$

Parameter	Symbol	Conditions		Value		Unit
Farameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Current consumption	lcc	$V_{CC} = 2.8 V, Vt = 1.2 V$	—	—	25.0*	mA
Frequency	fmin	Vcc = 2.8 V, Vt = 0.5 V	—	_	880.0*	MHz
Frequency	fmax	Vcc = 2.8 V, Vt = 1.9 V	915.0*	_	—	MHz
Control voltage sensitivity	kv	(fmax – fmin) /1.4	24.0		36.0	MHz/V
Oscillator output	Po	Vcc = 2.8 V, Vt = 1.2 V	2.0	_		dBm
		V _{cc} = 2.8 V, Vt = 1.2 V, Offset = 100 kHz, BW = 1 Hz	100.0			dBc/Hz
C/N	C/N	V _{cc} = 2.8 V, Vt = 1.2 V, Offset = 400 kHz, BW = 1 Hz	125.0			dBc/Hz
		V _{cc} = 2.8 V, Vt = 1.2 V, Offset = 20 MHz, BW = 1 Hz	165.0			dBc/Hz
Higher harmonics	Hs	$V_{CC} = 2.8 V, Vt = 1.2 V,$ 2nd, 3rd		_	-15.0	dBc
Power supply variation	Push	$V_{CC} = 2.8 V \pm 0.1 V,$ Vt = 1.2 V	_	_	±1000	kHz
Load variation	Pull	Vcc = 2.8 V, Vt = 1.2 V, VSWR = 2 ALL PHASE			±2000	kHz
Temperature drift	Td	Ta = +25 (+50/–45) °C			±2000*	kHz

* : Ta = -20° C to $+75^{\circ}$ C

8. For GSM (Part number : VC-2R8A50-1171)

• Absolute Maximum Ratings

Parameter	Symbol	Ra	- Unit	
Farameter	Symbol	Min.	Max.	Onic
Input DC voltage	Vcc	-0.3	+2.9	V
Control voltage	Vt	0	+2.9	V
Operating temperature	Та	-20	+75	°C
Storage temperature	Tstg	-30	+85	°C
Storage humidity	Hstg	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Electrical Characteristics

$(Ta = +25^{\circ}C \pm 3^{\circ}C)$						
Parameter	Symbol	Conditions		Value		Unit
Falameter	Symbol	Conditions	Min.	Тур.	Max.	Onic
Current consumption	Icc	Vcc = 2.8 V, Vt = 1.425 V	_	—	8.0*	mA
Frequency	fmin	$V_{CC} = 2.8 V, Vt = 0.85 V$			1136.0*	MHz
Frequency	fmax	$V_{CC} = 2.8 V, Vt = 2.0 V$	1206.0*			MHz
Control voltage sensitivity	kv	(fmax – fmin) /1.15	70.0*		90.0*	MHz/V
Oscillator output	Po	Vcc = 2.8 V, Vt = 1.425 V	-5.0*		+1.0*	dBm
		Vcc = 2.8 V, Vt = 1.425 V, Offset = 10 kHz, BW = 1 Hz	85.0*			dBc/Hz
		Vcc = 2.8 V, Vt = 1.425 V, Offset = 400 kHz, BW = 1 Hz	117.0*			dBc/Hz
		Vcc = 2.8 V, Vt = 1.425 V, Offset = 600 kHz, BW = 1 Hz	122.0*			dBc/Hz
C/N	C/N	Vcc = 2.8 V, Vt = 1.425 V, Offset = 1.6 MHz, BW = 1 Hz	132.0*			dBc/Hz
		Vcc = 2.8 V, Vt = 1.425 V, Offset = 3 MHz, BW = 1 Hz	142.0*			dBc/Hz
		Vcc = 2.8 V, Vt = 1.425 V, Offset = 10 MHz, BW = 1 Hz	147.0 [*]			dBc/Hz
Higher harmonics	Hs	$V_{CC} = 2.8 V, Vt = 1.425 V,$ 2nd, 3rd			-10.0*	dBc
Power supply variation	Push	$V_{CC} = 2.8 V \pm 0.07 V,$ Vt = 1.425 V	—		±500*	kHz
Load variation	Pull	Vcc = 2.8 V, Vt = 1.425 V, VSWR = 2 ALL PHASE			±1000*	kHz
Temperature drift	Td	Ta = +25 (+50/–45) °C			±3000*	kHz

* : Ta = -20° C to $+75^{\circ}$ C

11

9. For GSM (Part number : VC-2R8A50-1360)

Absolute Maximum Ratings

Deremeter	Symbol	Ra	llait	
Parameter	Symbol	Min.	Max.	Unit
Input DC voltage	Vcc		+3.0	V
Control voltage	Vt		+3.0	V
Operating temperature	Та	-20	+80	°C
Storage temperature	Tstg	-30	+80	°C
Storage humidity	Hstg	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Electrical Characteristics

Value Parameter Symbol Conditions Unit Min. Тур. Max. Current Icc $V_{CC} = 2.85 \text{ V}, \text{ Vt} = 1.3 \text{ V}$ 9.0 ____ ____ mΑ consumption $V_{cc} = 2.85 \text{ V}, \text{ Vt} = 0.3 \text{ V}$ MHz Frequency fmin ____ ____ 1280.0 Frequency fmax $V_{CC} = 2.85 \text{ V}, \text{ Vt} = 2.3 \text{ V}$ MHz 1440.0 Control voltage MHz/V kv (fmax - fmin) /2.0 86.0 106.0 ____ sensitivity Oscillator output Po $V_{CC} = 2.85 \text{ V}, \text{ Vt} = 1.3 \text{ V}$ -3.0 dBm ____ $V_{CC} = 2.85 V, Vt = 1.3 V,$ 94.0 ____ ____ dBc/Hz Offset = 10 kHz, BW = 1 HzC/N C/N $V_{CC} = 2.85 V, Vt = 1.3 V,$ 145.0 dBc/Hz ____ Offset = 3 MHz, BW = 1 Hz $V_{cc} = 2.85 V, V_{t} = 1.3 V,$ Higher harmonics Hs -10.0 dBc ____ ____ 2nd, 3rd $V_{CC} = 2.85 \text{ V} \pm 0.15 \text{ V},$ Power supply Push ±1000 kHz variation Vt = 1.3 V $V_{CC} = 2.85 V, Vt = 1.3 V,$ Load variation Pull kHz ±2000 _____ VSWR = 2 ALL PHASE Temperature drift Τd Ta = +25 (+55/-45) °C kHz ± 3000

 $(Ta = +25^{\circ}C \pm 3^{\circ}C)$

10. For PHS (Part number : VC-2R7A50-1652) • Absolute Maximum Ratings

Parameter	Symbol	Rati		Unit
Farameter	Symbol	Min.	Max.	
Input DC voltage	Vcc		+5.0	V
Control voltage	Vt		+5.0	V
Operating temperature	Та	-20	+60	°C
Storage temperature	Tstg	-35	+85	°C
Storage humidity	Hstg	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Electrical Characteristics

 $(Ta = +25^{\circ}C \pm 3^{\circ}C)$ Value Symbol Conditions Parameter Unit Min. Max. Тур. Current lcc $V_{CC} = 2.7 \text{ V}, \text{ Vt} = 0.4 \text{ V to } 2.1 \text{ V}$ 5.5* mΑ consumption Frequency fmin $V_{CC} = 2.7 V, V_{t} = 0.4 V$ 1632.5* MHz ____ ____ Frequency fmax $V_{CC} = 2.7 V, V_{t} = 2.1 V$ 1672.5* MHz Control voltage 48.0 MHz/V kv (fmax - fmin) / 1.736.0 sensitivity $V_{CC} = 2.7 \text{ V}, \text{ Vt} = 0.4 \text{ V to } 2.1 \text{ V}$ -6.0* dBm ____ ____ Ро Oscillator output $V_{CC} = 2.7 \text{ V}, \text{ Vt} = 0.0 \text{ V to } 2.7 \text{ V}$ -10.0* dBm $V_{CC} = 2.7 V, V_{t} = 0.4 V to 2.1 V,$ C/N C/N dBc/Hz 109.0* ____ Offset = 100 kHz, BW = 1 Hz $V_{CC} = 2.7 V, V_{t} = 0.4 V to 2.1 V,$ Higher harmonics Hs -15.0* dBc ____ ____ 2nd, 3rd Power supply $Vcc = 2.7 V \pm 0.1 V$, Push ±600 kHz Vt = 0.4 V to 2.1 V variation $V_{CC} = 2.7 V, V_{t} = 0.4 V to 2.1 V,$ Pull Load variation ±1000 kHz ____ ____ VSWR = 2 ALL PHASE Τd Ta = +25 (+45/-35) °C kHz Temperature drift ±3000

* : $Ta = -20^{\circ}C$ to $+60^{\circ}C$

13

11. For PHS (Part number : VC-3R0A50-1668N)

• Absolute Maximum Ratings

Parameter	Symbol	Ra	ating	Unit
Farameter	Symbol	Min.	Max.	Unit
Input DC voltage	Vcc		+3.2	V
Operating temperature	Та	-10	+60	°C
Storage temperature	Tstg	-30	+85	°C
Storage humidity	Hstg	5	85	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.


• Electrical Characteristics

				Value	,	11-24
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Current consumption	lcc	Vcc = 3.0 V, Vt = 1.5 V			7.0*	mA
Frequency	fmin	$V_{CC} = 3.0 \text{ V}, \text{ Vt} = 0.5 \text{ V}$		_	1649.7*	MHz
Frequency	fmax	Vcc = 3.0 V, Vt = 2.5 V	1686.3*			MHz
Control voltage sensitivity	kv	(fmax – fmin) /2.0	25.0	31.0	37.0	MHz/V
Oscillator output	Po	$V_{CC} = 3.0 \text{ V}, \text{ Vt} = 1.5 \text{ V}$	-6.0*	_	_	dBm
C/N	C/N	Vcc = 3.0 V, Vt = 1.5 V, Offset = 100 kHz, BW = 1 Hz	110.0*			dBc/Hz
Higher harmonics	Hs	$V_{cc} = 3.0 \text{ V}, \text{ Vt} = 1.5 \text{ V},$ Up to 3rd			-15.0	dBc
Power supply variation	Push	$V_{CC} = 3.0 V \pm 0.2 V,$ Vt = 1.5 V		_	±800	kHz
Load variation	Pull	Vcc = 3.0 V, Vt = 1.5 V, VSWR = 2 ALL PHASE			±1000	kHz
Temperature drift	Td	$Ta = +25^{\circ}C \pm 35^{\circ}C$			±4000*	kHz


(Ta = +25°C ± 3°C)

* : Ta = -10° C to $+60^{\circ}$ C


■ MARKING

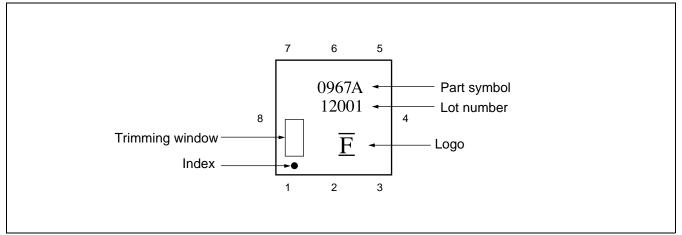


PART NUMBER DESIGNATION

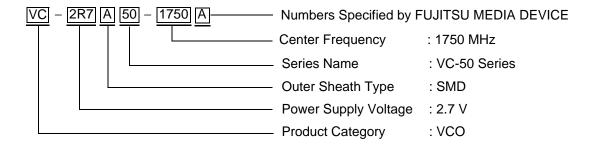


■ PACKAGE DIMENSION

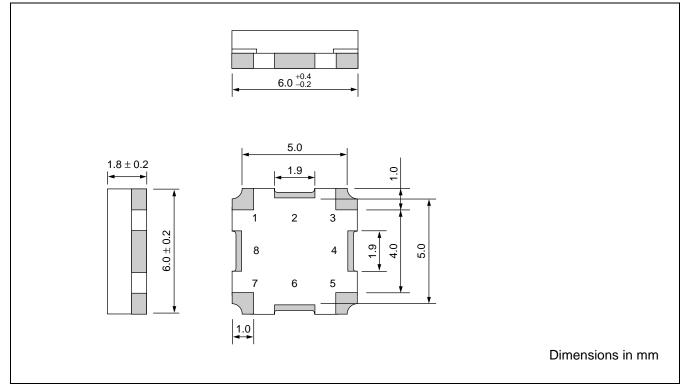


■ RECOMMENDED PATTERN FOR SOLDERING

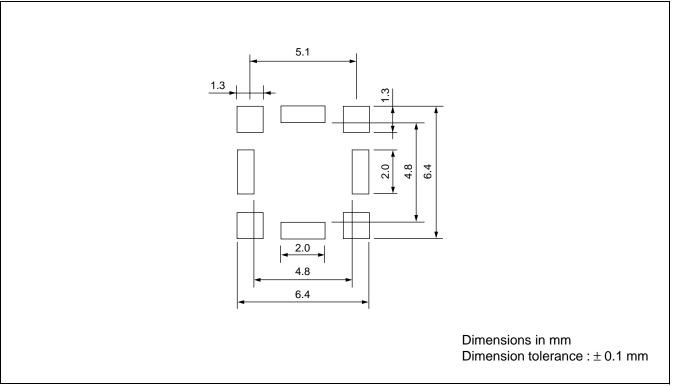


■ TAPING AND PACKAGING




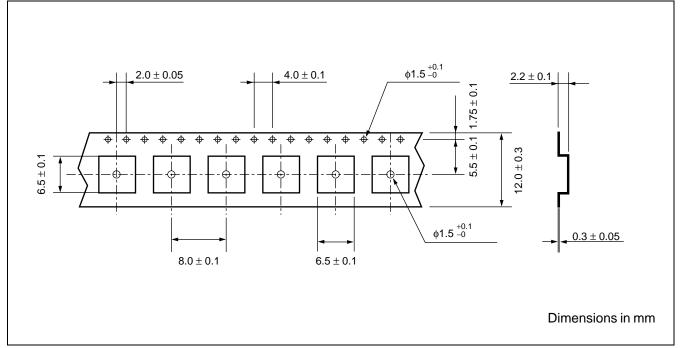

(2) Taping Layout

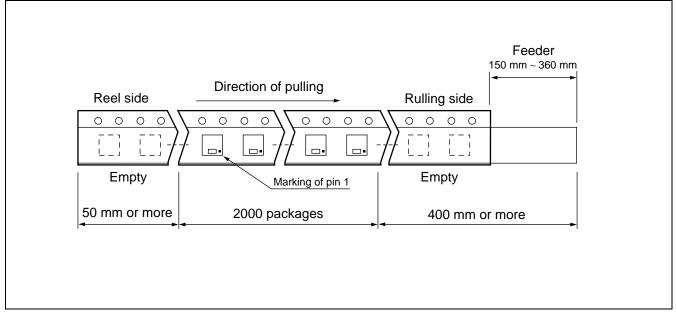


(3) Reel Shape and Dimensions

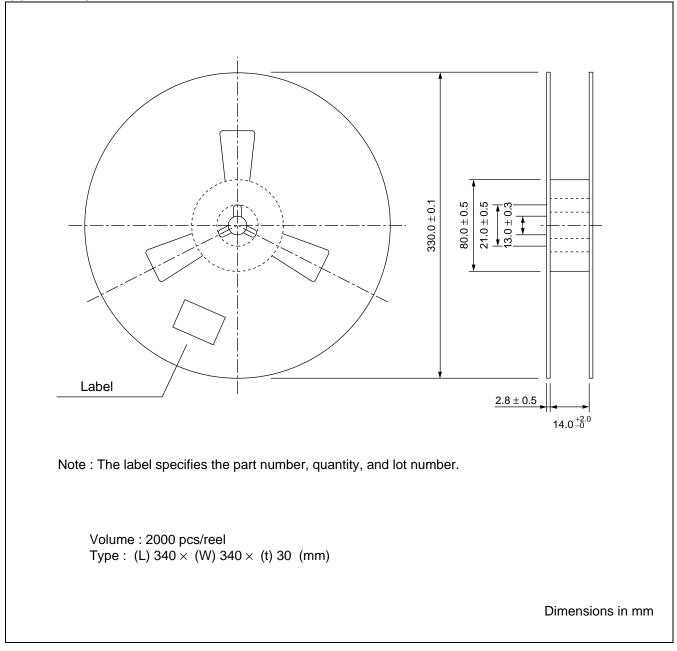

■ REFLOW MOUNTING CONDITIONS (RECOMMENDED)

- Perform mounting using the temperature profile shown below. To prevent thermal stress to the VCO, ensure gentle temperature gradients and use preheating whenever possible. (Recommended preheating: 140°C to 160°C for 60 s ± 20 s)
- Always consult FUJITSU MEDIA DEVICE beforehand if mounting more than once.
- Never remove a VCO that has already been mounted and attempt to reuse.
- For mounting, use a general-purpose flux suitable for mounting electronic components.

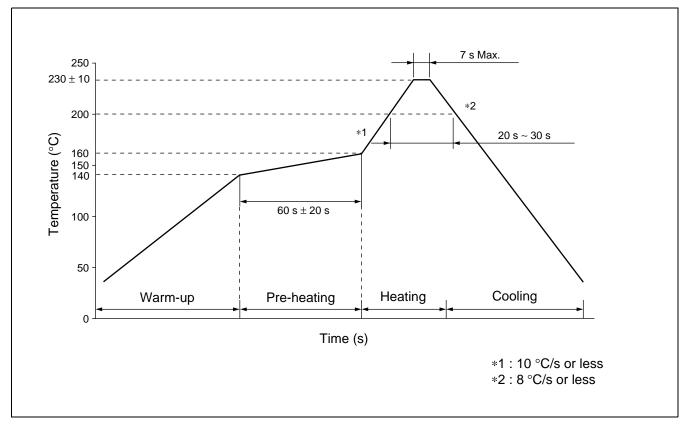

WASHING CONDITIONS

- Washing solution: Use isopropyl alcohol.
- Washing procedure: Immersion or steam cleaning is recommended.
- Washing time: For immersion: Less than 5 minutes at 40°C or less.

For steam: Less than 2 minutes at 90°C or less is recommended.

FUJITSU MEDIA DEVICES LIMITED

For further information please contact:

Japan

FUJITSU MEDIA DEVICE LIMITED International Sales & Marketing DEPT. Shin-Yokohama Square Bldg.,14F, Shin-yokohama 2-3-12, Kohoku-ku, Yokohama, Kanagawa 222-0033, Japan Tel: +81-45-471-0061 Fax: +81-45-471-0076

http://www.fujitsu.co.jp/hypertext/fmd/English/index.html

North and South America

FUJITSU MICROELECTRONICS, INC. 3545 North First Street, San Jose, CA 95134-1804, U.S.A. Tel: +1-408-922-9000 Fax: +1-408-922-9179

Customer Response Center *Mon. - Fri.: 7 am - 5 pm (PST)* Tel: +1-800-866-8608 Fax: +1-408-922-9179

http://www.fujitsumicro.com/

Europe

FUJITSU MICROELECTRONICS EUROPE GmbH Am Siebenstein 6-10, D-63303 Dreieich-Buchschlag, Germany Tel: +49-6103-690-0 Fax: +49-6103-690-122

http://www.fujitsu-fme.com/

Asia Pacific

FUJITSU MICROELECTRONICS ASIA PTE. LTD. #05-08, 151 Lorong Chuan, New Tech Park, Singapore 556741 Tel: +65-281-0770 Fax: +65-281-0220

http://www.fmap.com.sg/

F0101 © FUJITSU LIMITED Printed in Japan All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document are presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

The contents of this document may not be reproduced or copied without the permission of FUJITSU LIMITED.

FUJITSU semiconductor devices are intended for use in standard applications (computers, office automation and other office equipments, industrial, communications, and measurement equipments, personal or household devices, etc.). CAUTION:

Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.