Features


- · Low-voltage and Standard-voltage Operation
 - $-2.7 (V_{CC} = 2.7V \text{ to } 5.5V)$
 - 1.8 ($V_{CC} = 1.8V$ to 5.5V)
- · User-selectable Internal Organization
 - 2K: 256 x 8 or 128 x 16
 - 4K: 512 x 8 or 256 x 16
- · 3-wire Serial Interface
- · Sequential Read Operation
- 2 MHz Clock Rate (5V)
- Self-timed Write Cycle (10 ms Max)
- · High Reliability
 - Endurance: 1 Million Write Cycles
 - Data Retention: 100 Years
- Automotive Grade, Extended Temperature, and Lead-free/Halogen-free Devices Available
- 8-lead PDIP, 8-lead JEDEC SOIC, 8-lead EIAJ SOIC, 8-lead MAP, 8-lead TSSOP, and 8-ball dBGA2™ Packages


Description


The AT93C56A/66A provides 2048/4096 bits of serial electrically erasable programmable read-only memory (EEPROM) organized as 128/256 words of 16 bits each when the ORG pin is connected to VCC and 256/512 words of 8 bits each when it is tied to ground. The device is optimized for use in many industrial and commercial applications where low-power and low-voltage operations are essential. The AT93C56A/66A is available in space-saving 8-lead PDIP, 8-lead JEDEC SOIC, 8-lead EIAJ SOIC, 8-lead MAP, 8-lead TSSOP, and 8-ball dBGA2™ packages.


Pin Configurations

Pin Name Function				
CS	Chip Select			
SK	Serial Data Clock			
DI	Serial Data Input			
DO	Serial Data Output			
GND	Ground			
VCC	Power Supply			
ORG	Internal Organization			
DC	Don't Connect			











3-wire Serial EEPROMs

2K (256 x 8 or 128 x 16)

4K (512 x 8 or 256 x 16)

AT93C56A AT93C66A

Advance Information

Rev. 3378F-SEEPR-04/04





The AT93C56A/66A is enabled through the Chip Select pin (CS) and accessed via a 3-wire serial interface consisting of Data Input (DI), Data Output (DO), and Shift Clock (SK). Upon receiving a READ instruction at DI, the address is decoded and the data is

clocked out serially on the data output pin DO. The WRITE cycle is completely self-timed and no separate ERASE cycle is required before WRITE. The WRITE cycle is only enabled when the part is in the ERASE/WRITE ENABLE state. When CS is brought "high" following the initiation of a WRITE cycle, the DO pin outputs the READY/BUSY status of the part.

The AT93C56A/66A is available in 2.7V to 5.5V and 1.8V to 5.5V versions.


Absolute Maximum Ratings*

Operating Temperature55°C to +125°C
Storage Temperature65°C to +150°C
Voltage on Any Pin with Respect to Ground1.0V to +7.0V
Maximum Operating Voltage 6.25V
DC Output Current

*NOTICE:

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability

Block Diagram

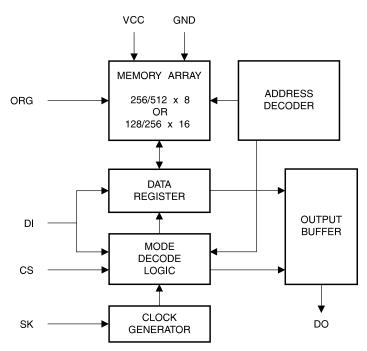

Note: When the ORG pin is connected to VCC, the x 16 organization is selected. When it is connected to ground, the x 8 organization is selected. If the ORG pin is left unconnected and the application does not load the input beyond the capability of the internal 1 Meg ohm pullup, then the x 16 organization is selected. The feature is not available on the 1.8V devices.

Pin Capacitance⁽¹⁾

Applicable over recommended operating range from $T_A = 25$ °C, f = 1.0 MHz, $V_{CC} = +5.0$ V (unless otherwise noted).

Symbol	ymbol Test Conditions		Units	Conditions
C _{OUT}	Output Capacitance (DO)	5	pF	V _{OUT} = 0V
C _{IN}	Input Capacitance (CS, SK, DI)	5	pF	$V_{IN} = 0V$

Note: 1. This parameter is characterized and is not 100% tested.

DC Characteristics

Applicable over recommended operating range from: T $_{AI}$ = -40°C to +85°C, V $_{CC}$ = +1.8V to +5.5V, $_{AE}$ = -40°C to +125°C, V $_{CC}$ = +1.8V to +5.5V (unless otherwise noted).

Symbol	Parameter	Test Condition		Min	Тур	Max	Unit
V _{CC1}	Supply Voltage			1.8		5.5	V
V _{CC2}	Supply Voltage			2.7		5.5	V
V _{CC3}	Supply Voltage			4.5		5.5	V
	Complex Comment	V 5.0V	READ at 1.0 MHz		0.5	2.0	mA
I _{cc}	Supply Current	$V_{CC} = 5.0V$	WRITE at 1.0 MHz		0.5	2.0	mA
I _{SB1}	Standby Current	V _{CC} = 1.8V	CS = 0V		0	0.1	μΑ
I _{SB2}	Standby Current	V _{CC} = 2.7V	CS = 0V		6.0	10.0	μΑ
I _{SB3}	Standby Current	V _{CC} = 5.0V	CS = 0V		17	30	μΑ
I _{IL}	Input Leakage	$V_{IN} = 0V \text{ to } V_{CC}$			0.1	3.0	μΑ
I _{OL}	Output Leakage	$V_{IN} = 0V \text{ to } V_{CC}$			0.1	3.0	μΑ
V _{IL1} ⁽¹⁾ V _{IH1} ⁽¹⁾	Input Low Voltage Input High Voltage	2.7V ≤ V _{CC} ≤ 5.5V		-0.6 2.0		0.8 V _{CC} + 1	V
V _{IL2} ⁽¹⁾ V _{IH2} ⁽¹⁾	Input Low Voltage Input High Voltage	1.8V ≤ V _{CC} ≤ 2.7V		-0.6 V _{CC} x 0.7		V _{CC} x 0.3 V _{CC} + 1	V
V _{OL1}	Output Low Voltage	0.71/ < 1/ < 5.51/	I _{OL} = 2.1 mA			0.4	V
V _{OH1}	Output High Voltage	$2.7V \le V_{CC} \le 5.5V$	I _{OH} = -0.4 mA	2.4			V
V _{OL2}	Output Low Voltage	101/21/2071/	I _{OL} = 0.15 mA			0.2	V
V _{OH2}	Output High Voltage	$1.8V \le V_{CC} \le 2.7V$	$I_{OH} = -100 \mu A$	V _{CC} - 0.2			V

Note: 1. V_{IL} min and V_{IH} max are reference only and are not tested.





AC Characteristics

Applicable over recommended operating range from T $_{AI}$ = -40°C to + 85°C, T $_{AE}$ = -40°C to +125°C, V $_{CC}$ = As Specified, CL = 1 TTL Gate and 100 pF (unless otherwise noted).

Symbol	Parameter	Test Condition		Min	Тур	Max	Units
f _{sk}	SK Clock Frequency	$4.5V \le V_{CC} \le 5.5V$ $2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$	/	0 0 0		2 1 0.25	MHz
t _{SKH}	SK High Time	$2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$! !	250 1000			ns
t _{SKL}	SK Low Time	$2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$		250 1000			ns
t _{CS}	Minimum CS Low Time	$2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$		250 1000			ns
t _{CSS}	CS Setup Time	Relative to SK	$2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$	50 200			ns
t _{DIS}	DI Setup Time	Relative to SK	$2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$	100 400			ns
t _{CSH}	CS Hold Time	Relative to SK		0			ns
t _{DIH}	DI Hold Time	Relative to SK	$2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$	100 400			ns
t _{PD1}	Output Delay to "1"	AC Test	$2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$			250 1000	ns
t _{PD0}	Output Delay to "0"	AC Test	$2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$			250 1000	ns
t _{SV}	CS to Status Valid	AC Test	$2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$			250 1000	ns
t _{DF}	CS to DO in High Impedance	AC Test CS = V _{IL}	$2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$			150 400	ns
	With Oarly T	,				10	ms
t _{WP}	Write Cycle Time		4.5V ≤ V _{CC} ≤ 5.5V	0.1	3		ms
Endurance ⁽¹⁾	5.0V, 25°C, Page Mo	de	·	1M			Write Cycles

Note: 1. This parameter is characterized and is not 100% tested.

Instruction Set for the AT93C56A and AT93C66A

		Op	Addre	ess	Data		
Instruction	SB	Code	x 8	x 16	x 8	x 16	Comments
READ	1	10	$A_8 - A_0$	$A_7 - A_0$			Reads data stored in memory, at specified address.
EWEN	1	00	11XXXXXXX	11XXXXXX			Write enable must precede all programming modes.
ERASE	1	11	$A_8 - A_0$	$A_7 - A_0$			Erases memory location A _n – A ₀ .
WRITE	1	01	$A_8 - A_0$	$A_7 - A_0$	$D_7 - D_0$	D ₁₅ - D ₀	Writes memory location $A_n - A_0$.
ERAL	1	00	10XXXXXXX	10XXXXXX			Erases all memory locations. Valid only at $V_{CC} = 4.5V$ to 5.5V.
WRAL	1	00	01XXXXXXX	01XXXXXX	D ₇ – D ₀	D ₁₅ - D ₀	Writes all memory locations. Valid only at $V_{CC} = 5.0V \pm 10\%$ and Disable Register cleared.
EWDS	1	00	00XXXXXXX	00XXXXXX			Disables all programming instructions.

Note: The X's in the address field represent don't care values and must be clocked.

Functional Description

The AT93C56A/66A is accessed via a simple and versatile 3-wire serial communication interface. Device operation is controlled by seven instructions issued by the host processor. **A valid instruction starts with a rising edge of CS** and consists of a Start Bit (logic "1") followed by the appropriate Op Code and the desired memory address location.

READ (READ): The Read (READ) instruction contains the address code for the memory location to be read. After the instruction and address are decoded, data from the selected memory location is available at the serial output pin DO. Output data changes are synchronized with the rising edges of serial clock SK. It should be noted that a dummy bit (logic "0") precedes the 8- or 16-bit data output string. The AT93C56A/66A supports sequential read operations. The device will automatically increment the internal address pointer and clock out the next memory location as long as Chip Select (CS) is held high. In this case, the dummy bit (logic "0") will not be clocked out between memory locations, thus allowing for a continuous stream of data to be read.

ERASE/WRITE (EWEN): To assure data integrity, the part automatically goes into the Erase/Write Disable (EWDS) state when power is first applied. An Erase/Write Enable (EWEN) instruction must be executed first before any programming instructions can be carried out. Please note that once in the EWEN state, programming remains enabled until an EWDS instruction is executed or V_{CC} power is removed from the part.

ERASE (ERASE): The Erase (ERASE) instruction programs all bits in the specified memory location to the logical "1" state. The self-timed erase cycle starts once the ERASE instruction and address are decoded. The DO pin outputs the READY/BUSY status of the part if CS is brought high after being kept low for a minimum of 250 ns (t_{CS}). A logic "1" at pin DO indicates that the selected memory location has been erased, and the part is ready for another instruction.





WRITE (WRITE): The Write (WRITE) instruction contains the 8 or 16 bits of data to be written into the specified memory location. The self-timed programming cycle t_{WP} starts after the last bit of data is received at serial data input pin DI. The DO pin outputs the READY/BUSY status of the part if CS is brought high after being kept low for a minimum of 250 ns (t_{CS}). A logic "0" at DO indicates that programming is still in progress. A logic "1" indicates that the memory location at the specified address has been written with the data pattern contained in the instruction and the part is ready for further instructions. A READY/BUSY status cannot be obtained if the CS is brought high after the end of the self-timed programming cycle t_{WP} .


ERASE ALL (ERAL): The Erase All (ERAL) instruction programs every bit in the memory array to the logic "1" state and is primarily used for testing purposes. The DO pin outputs the READY/BUSY status of the part if CS is brought high after being kept low for a minimum of 250 ns (t_{CS}). The ERAL instruction is valid only at $V_{CC} = 5.0V \pm 10\%$.

WRITE ALL (WRAL): The Write All (WRAL) instruction programs all memory locations with the data patterns specified in the instruction. The DO pin outputs the READY/BUSY status of the part if CS is brought high after being kept low for a minimum of 250 ns (t_{CS}). The WRAL instruction is valid only at $t_{CC} = 5.0 \text{ V} \pm 10\%$.

ERASE/WRITE DISABLE (EWDS): To protect against accidental data disturb, the Erase/Write Disable (EWDS) instruction disables all programming modes and should be executed after all programming operations. The operation of the READ instruction is independent of both the EWEN and EWDS instructions and can be executed at any time.

Timing Diagrams

Synchronous Data Timing

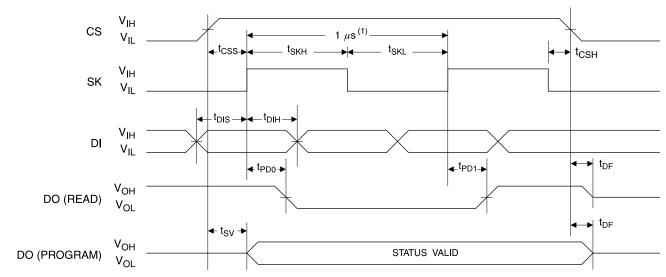


Note: 1. This is the minimum SK period.

Organization Key for Timing Diagrams


	AT93C56A (2K)		AT93C6	66A (4K)
I/O	x 8	x 16	x 8	x 16
A _N	A ₈ ⁽¹⁾	A ₇ ⁽²⁾	A ₈	A ₇
D _N	D ₇	D ₁₅	D ₇	D ₁₅

Notes: 1. A_8 is a DON'T CARE value, but the extra clock is required. 2. A_7 is a DON'T CARE value, but the extra clock is required.

READ Timing

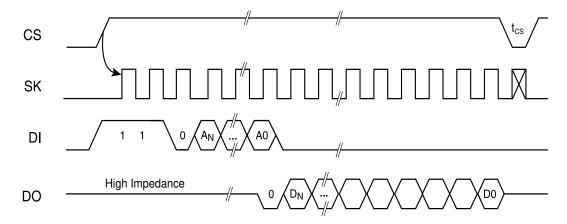


EWEN Timing

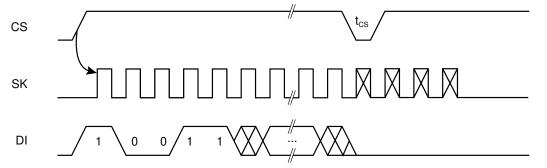





EWDS Timing

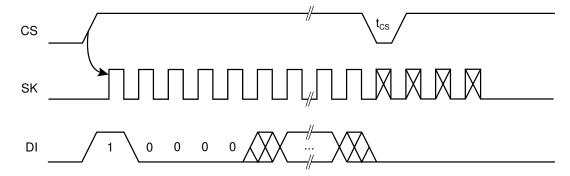

WRITE Timing

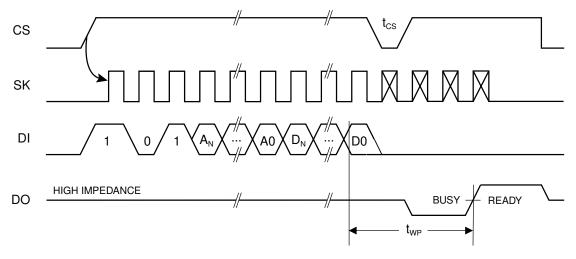


WRAL Timing⁽¹⁾

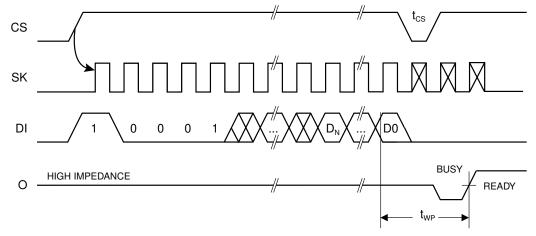


Note: 1. Valid only at $V_{CC} = 4.5V$ to 5.5V.

ERASE Timing

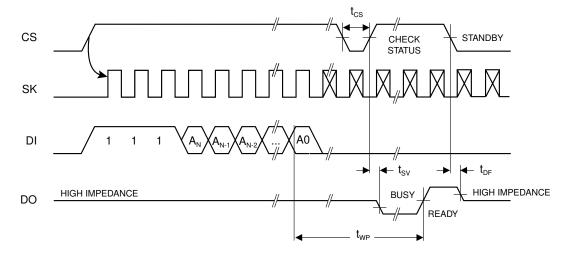

$\mathbf{ERAL}\ \mathbf{Timing}^{(1)}$

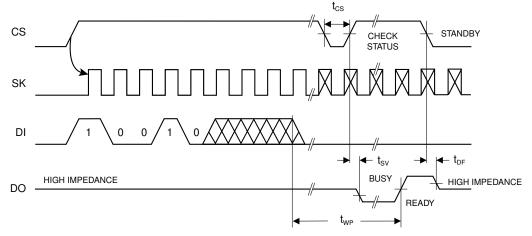

Note: 1. Valid only at $V_{CC} = 4.5V$ to 5.5V.



AT93C56A Ordering Information

Ordering Code	Package	Operation Range
AT93C56A-10PI-2.7	8P3	
AT93C56A-10SI-2.7	8S1	
AT93C56AW-10SI-2.7	8S2	Industrial Temperature
AT93C56A-10TI-2.7	8A2	(-40°C to 85°C)
AT93C56AU3-10UI-2.7	8U3-1	
AT93C56AY1-10YI-2.7	8Y1	
AT93C56A-10PI-1.8	8P3	
AT93C56A-10SI-1.8	8S1	
AT93C56AW-10SI-1.8	8S2	Industrial Temperature
AT93C56A-10TI-1.8	8A2	(-40°C to 85°C)
AT93C56AU3-10UI-1.8	8U3-1	
AT93C56AY1-10YI-1.8	8Y1	
AT93C56A-10SU-2.7	8S1	
AT93C56A-10SU-1.8	8S1	Lead-free/Halogen-free/ Industrial Temperature
AT93C56A-10TU-2.7	8A2	(–40°C to 85°C)
AT93C56A-10TU-1.8	8A2	(-40 0 to 05 0)
		Lead-free/Halogen-free/
AT93C56A-10SQ-2.7	8S1	High Grade/Extended Temperature
		(-40°C to 125°C)
AT02056A 1005 0.7	8S1	High Grade/Extended Temperature
AT93C56A-10SE-2.7	001	(-40°C to 125°C)

Note: For 2.7V devices used in the 4.5V to 5.5V range, please refer to performance values in the AC and DC characteristics table.

	Package Type				
8P3	8-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP)				
8S1	8-lead, 0.150" Wide, Plastic Gull Wing Small Outline (JEDEC SOIC)				
8S2	8-lead, 0.200" Wide, Plastic Gull Wing Small Outline (EIAJ SOIC)				
8A2	8-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP)				
8U3-1	8-ball, die Ball Grid Array Package (dBGA2)				
8Y1	8-lead, 4.90 mm x 3.00 mm Body, Dual Footprint, Non-leaded, Miniature Array Package (MAP)				
	Options				
-2.7	Low-voltage (2.7V to 5.5V)				
1.8	Low-voltage (1.8V to 5.5V)				

AT93C66A Ordering Information

Ordering Code	Package	Operation Range
AT93C66A-10PI-2.7	8P3	
AT93C66A-10SI-2.7	8S1	
AT93C66AW-10SI-2.7	8S2	Industrial
AT93C66A-10TI-2.7	8A2	(-40°C to 85°C)
AT93C66AU3-10UI-2.7	8U3-1	
AT93C66AY1-10YI-2.7	8Y1	
AT93C66A-10PI-1.8	8P3	
AT93C66A-10SI-1.8	8S1	
AT93C66AW-10SI-1.8	8S2	Industrial
AT93C66A-10TI-1.8	8A2	(-40°C to 85°C)
AT93C66AU3-10UI-1.8	8U3-1	
AT93C66AY1-10YI-1.8	8Y1	
AT93C66A-10SU-2.7	8S1	
AT93C66A-10SU-1.8	8S1	Lead-free/Halogen-free/
AT93C66A-10TU-2.7	8A2	Industrial Temperature (-40°C to 85°C)
AT93C66A-10TU-1.8	8A2	(-40 0 to 65 0)
		Lead-free/Halogen-free/
	8S1	High Grade/Extended Temperature
AT93C66A-10SQ-2.7		(-40°C to 125°C)
	8S1	High Grade/Extended Temperature
AT93C66A-10SE-2.7	001	(-40°C to 125°C)

Note: For 2.7V devices used in the 4.5V to 5.5V range, please refer to performance values in the AC and DC characteristics table.


	Package Type				
8P3	8-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP)				
8S1	8-lead, 0.150" Wide, Plastic Gull Wing Small Outline (JEDEC SOIC)				
8S2	8-lead, 0.200" Wide, Plastic Gull Wing Small Outline (EIAJ SOIC)				
8A2	8-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP)				
8U3-1	8-ball, die Ball Grid Array Package (dBGA2)				
8Y1	8-lead, 4.90 mm x 3.00 mm Body, Dual Footprint, Non-leaded, Miniature Array Package (MAP)				
	Options				
-2.7	Low-voltage (2.7V to 5.5V)				
-1.8	Low-voltage (1.8V to 5.5V)				







Packaging Information

8P3 - PDIP





End View



Top View

COMMON DIMENSIONS

(Unit of Measure = inches)

SYMBOL	MIN	NOM	MAX	NOTE
Α			0.210	2
A2	0.115	0.130	0.195	
b	0.014	0.018	0.022	5
b2	0.045	0.060	0.070	6
b3	0.030	0.039	0.045	6
С	0.008	0.010	0.014	
D	0.355	0.365	0.400	3
D1	0.005			3
Е	0.300	0.310	0.325	4
E1	0.240	0.250	0.280	3
е				
eA		4		
L	0.115	0.130	0.150	2


Notes:

- 1. This drawing is for general information only; refer to JEDEC Drawing MS-001, Variation BA for additional information.
- 2. Dimensions A and L are measured with the package seated in JEDEC seating plane Gauge GS-3.
- 3. D, D1 and E1 dimensions do not include mold Flash or protrusions. Mold Flash or protrusions shall not exceed 0.010 inch.
- 4. E and eA measured with the leads constrained to be perpendicular to datum.
- 5. Pointed or rounded lead tips are preferred to ease insertion.
- 6. b2 and b3 maximum dimensions do not include Dambar protrusions. Dambar protrusions shall not exceed 0.010 (0.25 mm).


01/09/02




8S1 - JEDEC SOIC



Top View



Side View

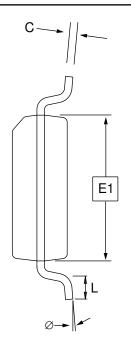

End View

COMMON DIMENSIONS

(Unit of Measure = mm)

SYMBOL	MIN	NOM	MAX	NOTE
Α	1.35	-	1.75	
A1	0.10	-	0.25	
b	0.31	_	0.51	
С	0.17	-	0.25	
D	4.80	_	5.00	
E1	3.81	_	3.99	
Е	5.79	_	6.20	
е	1.27 BSC			
L	0.40	_	1.27	
Ø	0°	-	8°	

Note: These drawings are for general information only. Refer to JEDEC Drawing MS-012, Variation AA for proper dimensions, tolerances, datums, etc.

10/7/03




1150 E. Cheyenne Mtn. Blvd. Colorado Springs, CO 80906 TITLE 8S1, 8-lead (0.150" Wide Body), Plastic Gull Wing Small Outline (JEDEC SOIC)


DRAWING NO.	REV.
8S1	В






8S2 - EIAJ SOIC





End View



Side View

COMMON DIMENSIONS


(Unit of Measure = mm)

SYMBOL	MIN	NOM	MAX	NOTE
Α	1.70		2.16	
A1	0.05		0.25	
b	0.35		0.48	5
С	0.15		0.35	5
D	5.13		5.35	
E1	5.18		5.40	2, 3
Е	7.70		8.26	
L	0.51		0.85	
Ø	0°		8°	
е	1.27 BSC			4


- Notes: 1. This drawing is for general information only; refer to EIAJ Drawing EDR-7320 for additional information.
 2. Mismatch of the upper and lower dies and resin burrs are not included.

 - 3. It is recommended that upper and lower cavities be equal. If they are different, the larger dimension shall be regarded.
 - 4. Determines the true geometric position.
 - 5. Values b and C apply to pb/Sn solder plated terminal. The standard thickness of the solder layer shall be 0.010 +0.010/-0.005 mm.


10/7/03




8A2 – TSSOP



Top View



Side View



End View


COMMON DIMENSIONS

(Unit of Measure = mm)

SYMBOL	MIN	NOM	MAX	NOTE
D	2.90	3.00	3.10	2, 5
Е	6.40 BSC			
E1	4.30	4.40	4.50	3, 5
Α	-	_	1.20	
A2	0.80	1.00	1.05	
b	0.19	_	0.30	4
е	0.65 BSC			
L	0.45	0.60	0.75	
L1	1.00 REF			

- Notes: 1. This drawing is for general information only. Refer to JEDEC Drawing MO-153, Variation AA, for proper dimensions, tolerances, datums, etc.
 - 2. Dimension D does not include mold Flash, protrusions or gate burrs. Mold Flash, protrusions and gate burrs shall not exceed 0.15 mm (0.006 in) per side.
 - 3. Dimension E1 does not include inter-lead Flash or protrusions. Inter-lead Flash and protrusions shall not exceed 0.25 mm (0.010 in) per side.
 - 4. Dimension b does not include Dambar protrusion. Allowable Dambar protrusion shall be 0.08 mm total in excess of the b dimension at maximum material condition. Dambar cannot be located on the lower radius of the foot. Minimum space between protrusion and adjacent lead is 0.07 mm.
 - 5. Dimension D and E1 to be determined at Datum Plane H.


5/30/02








8U3-1 - dBGA2






Bottom View 8 SOLDER BALLS

1. Dimension 'b' is measured at the maximum solder ball diameter.

This drawing is for general information only.



Side View

COMMON DIMENSIONS

(Unit of Measure = mm)

SYMBOL	MIN	NOM	MAX	NOTE
Α	0.71	0.81	0.91	
A1	0.10	0.15	0.20	
A2	0.40	0.45	0.50	
b	0.20	0.25	0.30	
D	1.50 BSC			
Е	2.00 BSC			
е	0.50 BSC			
e1	0.25 REF			
d	1.00 BSC			
d1	0.25 REF			

6/24/03


<u>AIMEL</u>

1150 E. Cheyenne Mtn. Blvd. Colorado Springs, CO 80906 **TITLE 8U3-1,** 8-ball, 1.50 x 2.00 mm Body, 0.50 mm pitch, Small Die Ball Grid Array Package (dBGA2)

DRAWING NO.
PO8U3-1

REV.

8Y1 - MAP

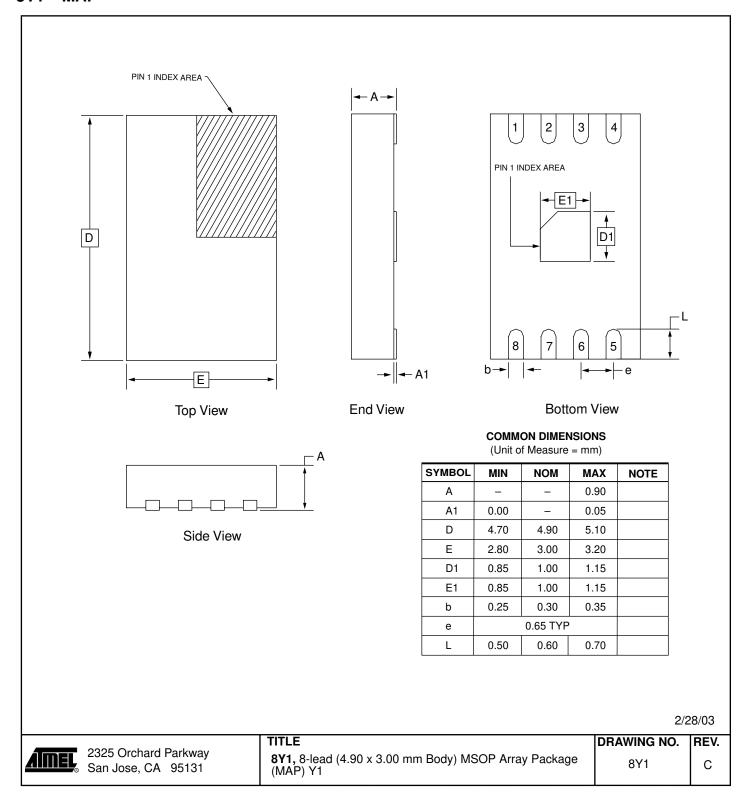



Atmel Corporation

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311

Fax: 1(408) 487-2600

Regional Headquarters

Europe

Atmel Sarl Route des Arsenaux 41 Case Postale 80 CH-1705 Fribourg Switzerland

Tel: (41) 26-426-5555 Fax: (41) 26-426-5500

Asia

Room 1219 Chinachem Golden Plaza 77 Mody Road Tsimshatsui East Kowloon Hong Kong

Tel: (852) 2721-9778 Fax: (852) 2722-1369

Iavan

9F, Tonetsu Shinkawa Bldg. 1-24-8 Shinkawa Chuo-ku, Tokyo 104-0033

Tel: (81) 3-3523-3551 Fax: (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311 Fax: 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311 Fax: 1(408) 436-4314

La Chantrerie BP 70602 44306 Nantes Cedex 3, France Tel: (33) 2-40-18-18-18 Fax: (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle 13106 Rousset Cedex, France Tel: (33) 4-42-53-60-00 Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd. Colorado Springs, CO 80906, USA

Tel: 1(719) 576-3300 Fax: 1(719) 540-1759

Scottish Enterprise Technology Park Maxwell Building East Kilbride G75 0QR, Scotland

Tel: (44) 1355-803-000 Fax: (44) 1355-242-743

RF/Automotive

Theresienstrasse 2 Postfach 3535 74025 Heilbronn, Germany Tel: (49) 71-31-67-0 Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd. Colorado Springs, CO 80906, USA

Tel: 1(719) 576-3300 Fax: 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine

BP 123

38521 Saint-Egreve Cedex, France

Tel: (33) 4-76-58-30-00 Fax: (33) 4-76-58-34-80

Literature Requests www.atmel.com/literature

Disclaimer: Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

© Atmel Corporation 2004. All rights reserved. Atmel® and combinations thereof, are the registered trademarks, and dBGA™ is the trademark of Atmel Corporation or its subsidiaries. Other terms and product names may be the trademarks of others.

