
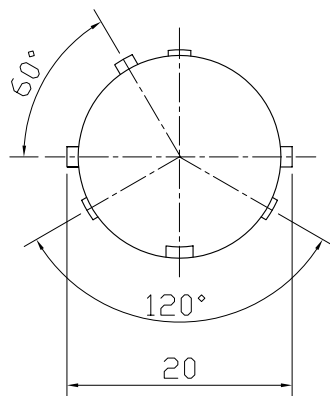
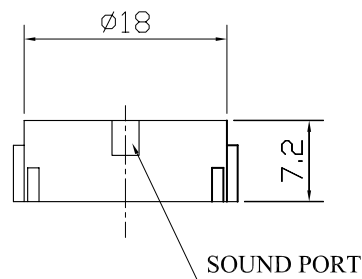


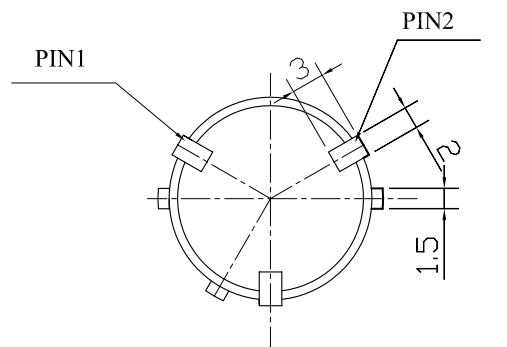

SPECIFICATION

1. Rated Voltage 3.6Vp-p Square Wave
2. Operating Voltage 25Vp-p Square Wave
3. Max. Rated Current 3mA at 2.0KHz/3.6Vp-p Square Wave
4. Resonant Frequency 2.0 ± 0.5 KHz
5. Min. Sound Pressure Level 70dB at 2.0KHz/3.6Vp-p Square Wave/10cm
6. Case Material/Color PPS/BLACK
7. Operating Temperature $-20 \sim +80^{\circ}\text{C}$
8. Store Temperature $-30 \sim +100^{\circ}\text{C}$
9. Weight 1.7g

				KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Piezo Buzzer	
				SPT-1872	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED ±2° ANGLES -1° FIRST ANGLE PROJECTION		APPROVALS	DATE	UNIT	DWG NO.
		DRAWN		mm	KP3.840.890
		CHECKED			
		APPROVED	04.07.26	SCALE	SHEET
				NOT TO SCALE	VER 1.0