METAL SHAFT ROTARY POTENTIOMETER

Q-4634

F-17SPD

Reverse Type with Switch, Single Unit, P.C.B. Terminal

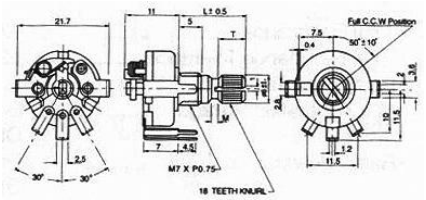



SPECIFICATIONS

Electrical Characteristics	•Total Resistance..... 100Ω~1MΩ
	•Total Resistance Tolerance .....± 20%
	•Resistance Taper.....A,B,C,D, See P81
	•Max. Operation Voltage .....Linear Taper B : AC 200 V .Other Tapers : AC 150V
	•Rated Power..... Linear Taper B : 0.1W
	Other Tapers : 0.05W
	•Sliding Noise.....Less than 100 mV
	•Insulation Resistance ..... More than 50 MΩ at DC 500 V
	•Withstand Voltage.....1 minute at AC 500 V
	•Residual Resistance .....Term. 1-2: Less than 10Ω
	Term. 2-3: Less than 10Ω
	•Switch Circuit..... S.P.S.T
	•Switch Contact Resistance.....Less than 50 mΩ
	•Switch Rated Power..... 1.0A at AC/DC 12 V
Mechanical Characteristics	•Total Rotational Angle .....260° ± 10°
	•Rotational Torque.....15 gf.cm ~ 200 gf.cm
	•Rotational Stopper Strength....3.0 Kgf.cm Min
	•Push-Pull Strength .....8.0 Kg.f Min
	•Switch Rotational Angle .....40°±5°
	•Switch Action .....150 gf.cm ~ 450 gf.cm
Durability	•Rotational Life ..... 10,000 Cycles