

规格书编号

SPEC NO :

# 产品规格书

# SPECIFICATION

CUSTOMER 客 户: \_\_\_\_\_

PRODUCT 产 品: **SAW FILTER**

MODEL NO 型 号: **HDBF44A3Dc SIP5Dc**

PREPARED 编 制: \_\_\_\_\_ CHECKED 审 核: \_\_\_\_\_

APPROVED 批 准: \_\_\_\_\_ D A T E 日 期: 2008-11-28

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司  
Shoulder Electronics Limited

## 更改历史记录 History Record

更改日期 Date	规格书编号 Spec. No.	产品型号 Part No.	客户产品型号 Customer No.	更改内容描述 Modify Content	备注 Remark

## 1.SCOPE


SHOULDER's SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal. piezoelectrical chip. they are used in electronic equipments such as TV and so on.

## 2.Construction

### 2.1 Dimension and materials


Manufacturer's name : SHOULDERELECTRONICS Co. LTD(CHINA)

Type : BF44A3Dc

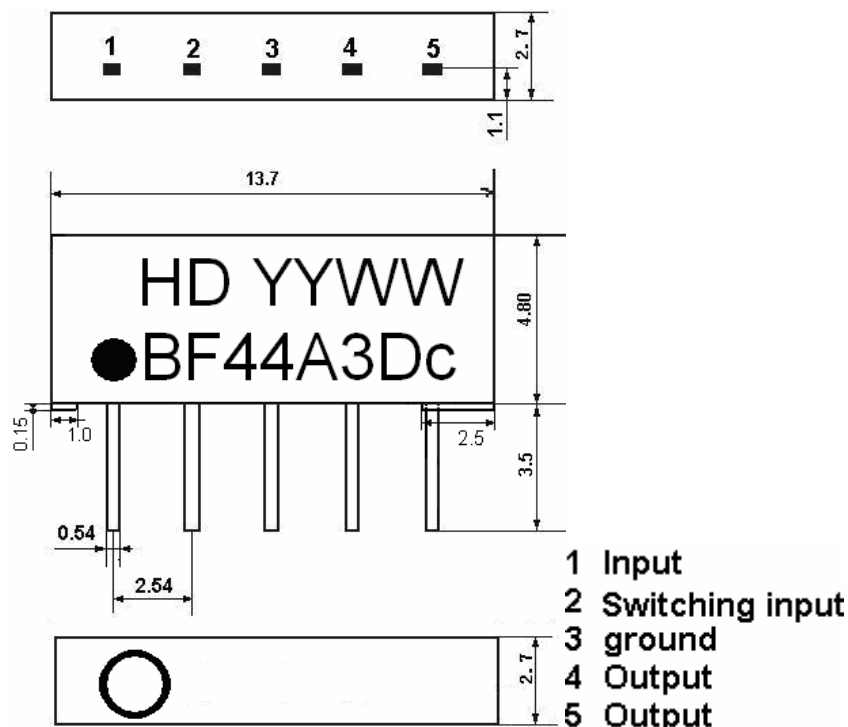


YY:year

WW:week

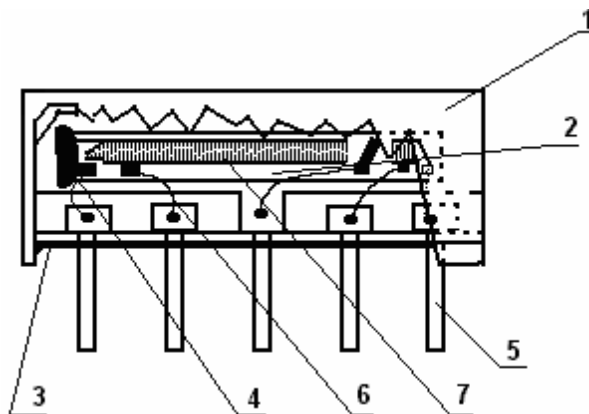

Components	Materials
1.Outer casing	PPS
2.Substrate	Lithium niobate
3.Base	Epoxy resin
4.Absorber	Epoxy resin
5.Lead	Cu alloy+Au plate
6.Bonding wire	AlSi alloy
7.Electrode	Al

## 2.2. Circuit construction, measurement circuit

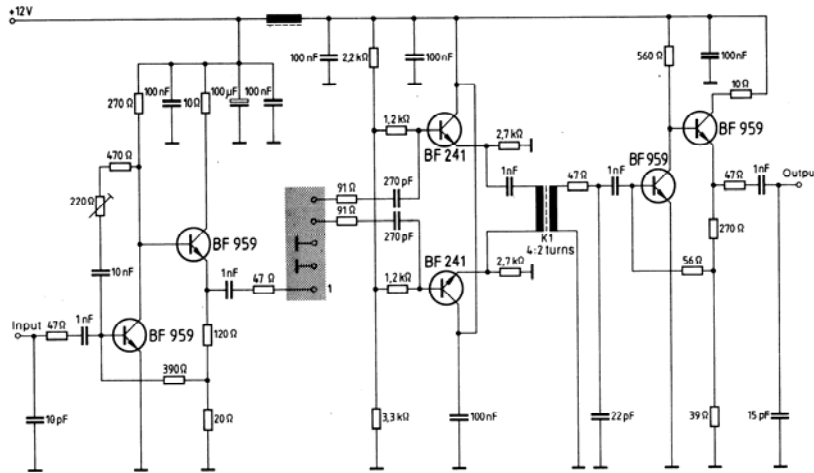

Test circuit for SIP-5 filter

Input impedance of the symmetrical post-amplifier: 2 kΩ in parallel with 3 pF

## 3.Characteristics

Items	Conditions	Specifications
Standard atmospheric conditions	Unless otherwise specified , the standard rang of atmospheric conditions for making measurements and tests is as follows; Ambient temperature : 15℃ to 35℃ Relative humidity : 25% to 85% Air pressure : 86kPa to 106kPa	There shall be no damage.
Operating temperature rang	Operating temperature rang is the rang of ambient temperatures in which the filter can be operated continuously. -10℃ ~ +60℃	
Storage temperature rang	Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage. Conditions are as specified elsewhere in these specifications. -40℃ ~ +70℃	
Reference temperature	+25℃	

### 3.1 Maximum Rating

DC voltage	VDC	12	V	Between any terminals
AC voltage	Vpp	10	V	Between any terminals

### 3.2 Electrical Characteristics

#### Characteristics of channel 1 (switching input pin 2 connected to ground pin 3)

Source impedance

$Z_s=50\ \Omega$

Load impedance

$Z_L=2k\ \Omega // 3pF$

$T_A=25^\circ C$

Item	Freq	min	typ	max	
Center frequency	Fo	-	44.00	-	MHz
Insertion attenuation Reference level	44.06MHz	12.5	14.5	16.5	dB
Pass bandwidth	B <sub>1dB</sub>	-	1.6	-	MHz
	B <sub>3dB</sub>	-	1.8	-	MHz
	B <sub>30dB</sub>	-	2.7	-	MHz
Sidelobe	35.06~40.26MHz	35.0	42.0		dB
	40.26~42.56MHz	30.0	38.0		dB
	45.56~48.66MHz	22.0	30.0		dB
	48.66~55.06MHz	32.0	39.0		dB
Temperature coefficient		-72			ppm/k

#### Characteristics of channel 2 (switching input pin 2 connected to input pin 1)

Source impedance

$Z_s=50\ \Omega$

Load impedance


$Z_L=2k\ \Omega // 3pF$

$T_A=25^\circ C$

Item	Freq	min	typ	max	
Center frequency	Fo	-	44.00	-	MHz
Insertion attenuation Reference level	44.06MHz	13.0	15.0	17.0	dB
Pass bandwidth	B <sub>1dB</sub>	-	0.8	-	MHz
	B <sub>3dB</sub>	-	1.2	-	MHz
	B <sub>30dB</sub>	-	2.4	-	MHz
Sidelobe	35.06~42.66MHz	31.0	39.0		dB
	45.36~47.36MHz	21.0	29.0		dB
	47.36~55.06MHz	31.0	39.0		dB
Temperature coefficient		-72			ppm/k

### 3.3 Environmental Performance Characteristics


Item	Condition	Specifications																					
High temperature	The specimen shall be store at a temperature of 80±2℃ for 96±4h. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.	Mechanical characteristics and specifications in electrical characteristics shall be satisfied. There shall be no excessive change in appearance.																					
Low temperature	The specimen shall be store at a temperature of -20±3℃ for 96±4h. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.																						
Humidity	The specimen shall be store at a temperature of 40±2℃ with relative humidity of 90% to 96% for 96±4h. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.																						
Thermal shock	<div><div>The specimen shall be subjected to 8 continuous cycles each as shown below. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.</div><table><tr><td></td><td>Temperature</td><td>Duration</td></tr><tr><td>1</td><td>+25 ℃=&gt;-40 ℃</td><td>0.5h</td></tr><tr><td>2</td><td>-40 ℃</td><td>4h</td></tr><tr><td>3</td><td>-40 ℃=&gt;+85 ℃</td><td>2h</td></tr><tr><td>4</td><td>+85 ℃</td><td>4h</td></tr><tr><td>5</td><td>+85 ℃=&gt;+25 ℃</td><td>0.5h</td></tr><tr><td>6</td><td>+25 ℃</td><td>1h</td></tr></table></div>			Temperature	Duration	1	+25 ℃=>-40 ℃	0.5h	2	-40 ℃	4h	3	-40 ℃=>+85 ℃	2h	4	+85 ℃	4h	5	+85 ℃=>+25 ℃	0.5h	6	+25 ℃	1h
	Temperature		Duration																				
1	+25 ℃=>-40 ℃	0.5h																					
2	-40 ℃	4h																					
3	-40 ℃=>+85 ℃	2h																					
4	+85 ℃	4h																					
5	+85 ℃=>+25 ℃	0.5h																					
6	+25 ℃	1h																					
Resistance to Soldering heat	Reflow soldering method Peak: 255 ±5 ℃, 220 ±5 ℃, 40s At electrode temperature of the specimen.																						

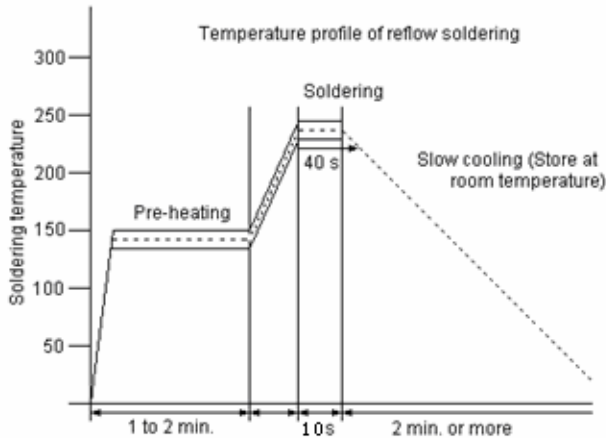	 <p>The specimen shall be passed through the reflow furnace with the condition shown in the above profile for 1 time.</p> <p>The specimen shall be stored at standard atmospheric conditions for 1h, after which the measurement shall be made. Test board shall be 1.6 mm thick. Base material shall be glass fabric base epoxy resin.</p>	
Solder ability	Immerse the pins melt solder at $260^{\circ}\text{C}+5/-0^{\circ}\text{C}$ for 5 sec.	More then 95% of total area of the pins should be covered with solder

### 3.4 Mechanical Test


Items	Conditions	Specifications
Vibration	600-3300rpm amplitude 1.5mm 3 directions 2 H each	There shall be no damage.
Drop	On maple plate from 1 m high 3 times	
Lead pull	Pull with 1 kg force for 30 seconds	
Lead bend	$90^{\circ}$ bending with 500g weigh 2 times	

### 3.5 Voltage Discharge Test


Item	Condition	Specifications
Surge	<p>Between any two electrode</p> 	<p>There shall be no damage</p>

### 3.6 Frequency response:

Frequency response of channel 1 (switching input pin 2 connected to ground pin 1)

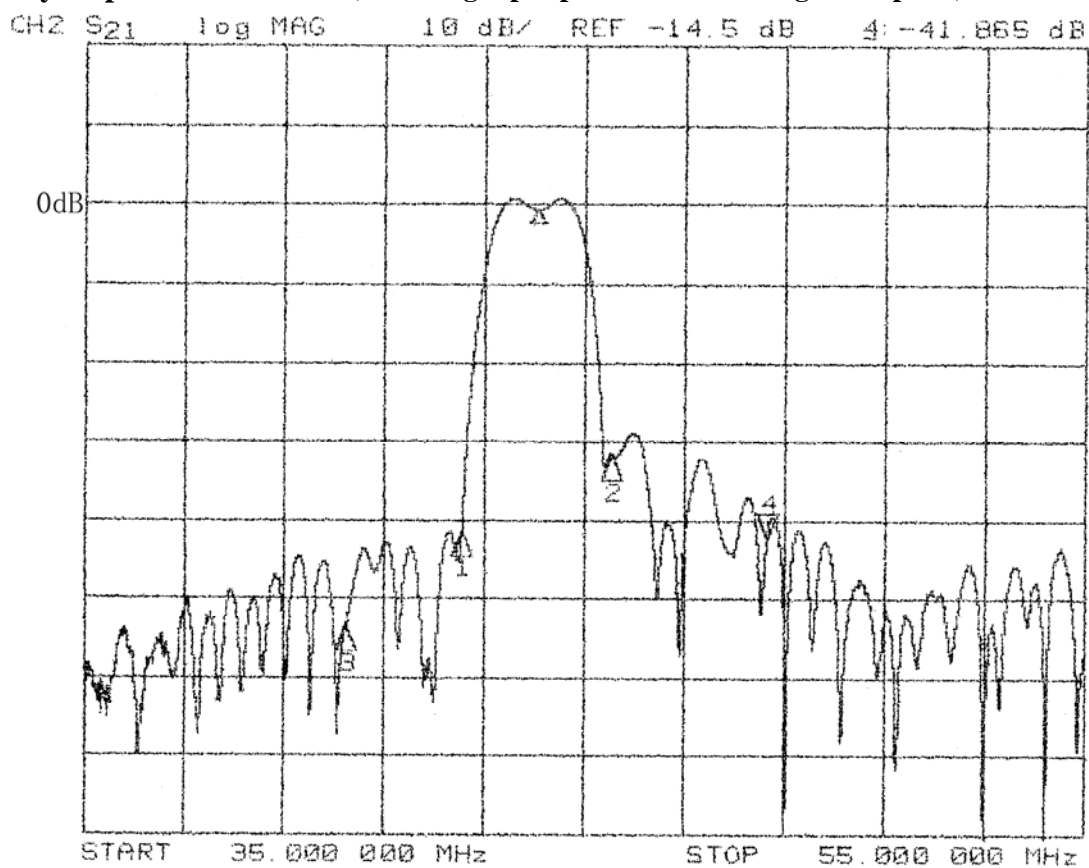




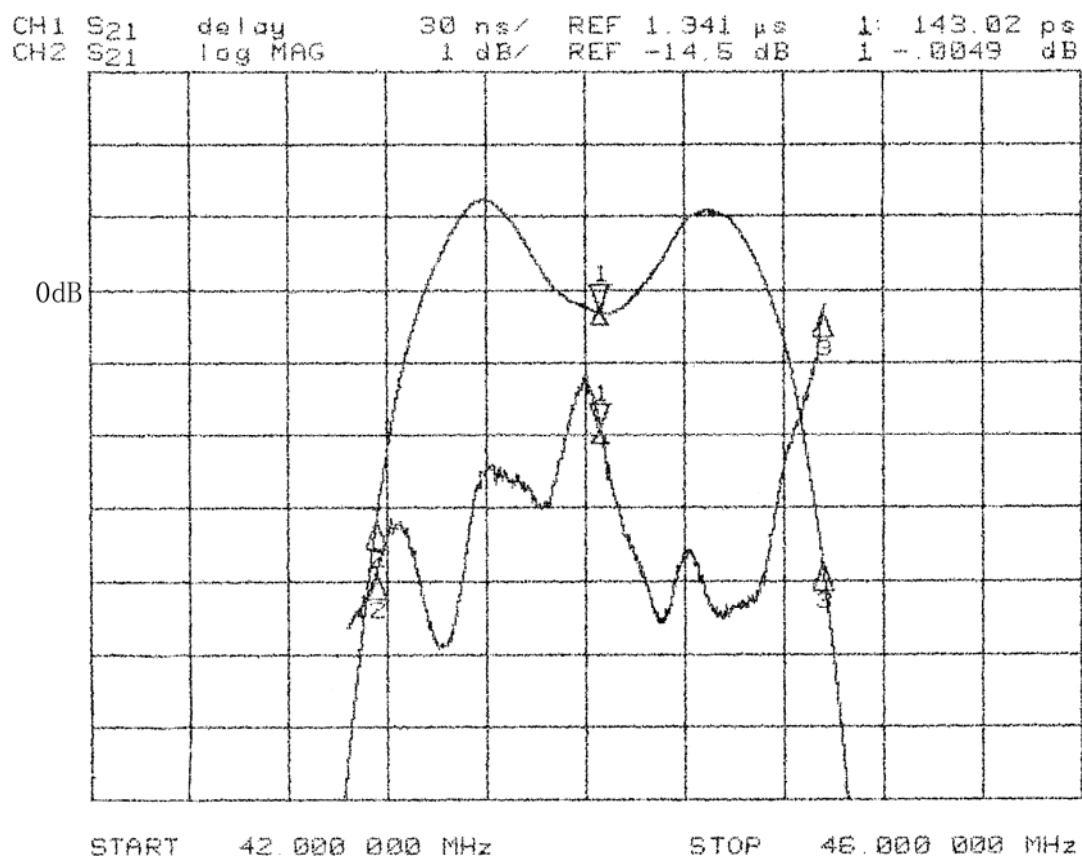


**Frequency response of channel 2 (switching input pin 2 connected to input pin 1)**

CH2 S21 log MAG 10 dB/ REF -15 dB 4: -54.118 dB

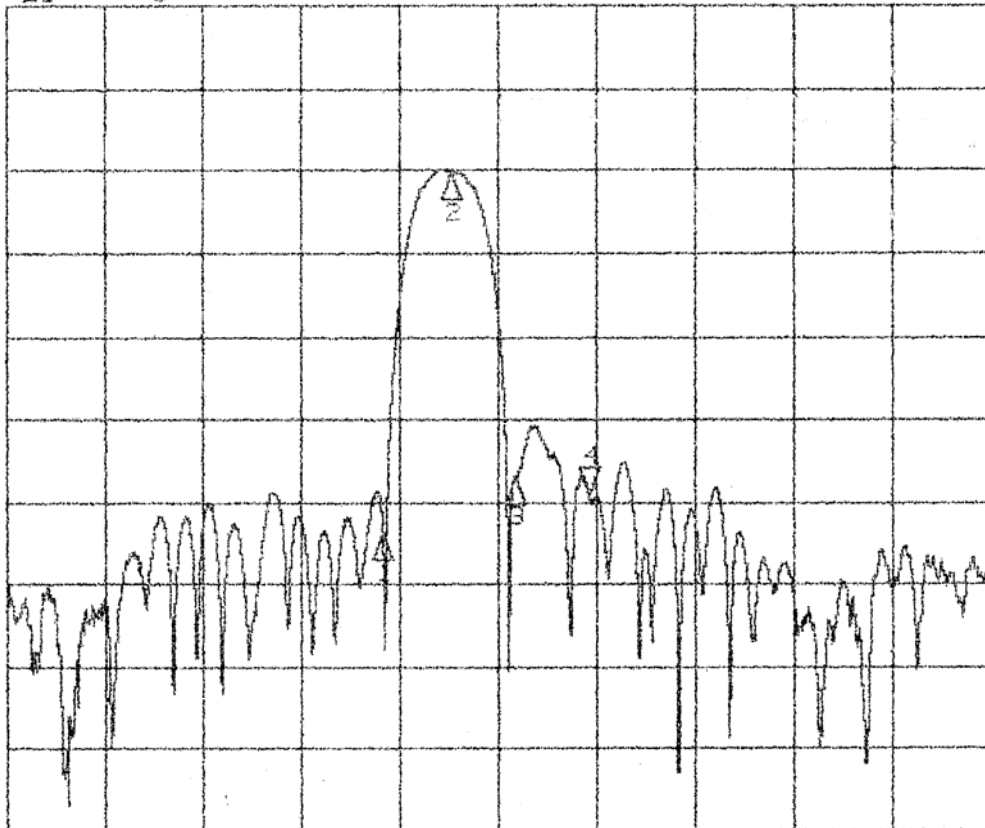

START 35.000 000 MHz STOP 55.000 000 MHz

CH1 S21 delay 30 ns/ REF 1.316 ps 2: 1.2203 ps  
CH2 S21 log MAG 1 dB/ REF -15 dB 3: -19.198 dB

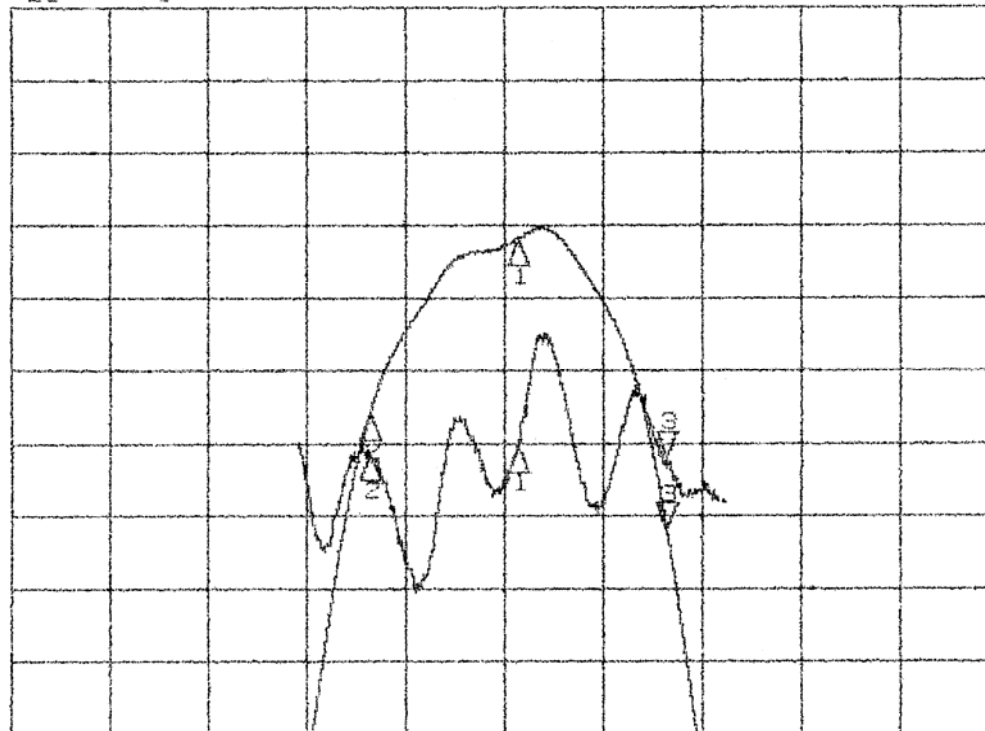

START 42.000 000 MHz STOP 46.000 000 MHz