



Ph Free

RoHS Compliant

### Features

- Reference frequency for telecommunication systems
- Reflow compatible
- Using ceramic package resulting in high reliability
- Small and low profile

### Applications

- Mobile Communications, Bluetooth, Wireless LAN

### How to Order

CX2520SH 26000 ☐ ☐ ☐ ☐ ☐ ☐

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series ② Frequency  
③ Load Capacitance ④ Frequency Stability

B0	6 pF	—	F	$\pm 10 \times 10^{-6}$	Std.
D0	8 pF	Std.	G	$\pm 15 \times 10^{-6}$	—

- ⑤ Operating Temp. Range ⑥ Frequency Temp. Stability

FF	−20 to +70°C	$\pm 10 \times 10^{-6}$	—
LJ	−30 to +85°C	$\pm 15 \times 10^{-6}$	Std.

- ⑦ Individual Specification

### Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f <sub>nom</sub>	26000 to 60000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	
Frequency Stability	f <sub>tol</sub>	±10	×10 <sup>−6</sup>	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T <sub>use</sub>	−30 to +85	°C	
Storage Temp. Range	T <sub>stg</sub>	−40 to +85	°C	
Frequency Temp. Characteristics	f <sub>tem</sub>	±15	×10 <sup>−6</sup>	Freq. deviation from the value at 25°C

\* Please contact us for other specifications.

### Typical Frequencies and Part Numbers

Frequency (kHz)	Part Number
26000.000	CX2520SH26000D0FLJZ1
27120.000	CX2520SH27120D0FLJZ1
32000.000	CX2520SH32000D0FLJZ1
38400.000	CX2520SH38400D0FLJZ1
40000.000	CX2520SH40000D0FLJZ1
44000.000	CX2520SH44000D0FLJZ1
54000.000	CX2520SH54000D0FLJZ1

Table1 Motional Series Resistance


Frequency Range	Motional Series Resistance
26000 to 29999kHz	60Ω max.
30000 to 60000kHz	50Ω max.

Table2 Level of Drive

Frequency Range	Level of Drive
26000 to 60000kHz	10μW (100μW max.)

### Dimensions

(Unit: mm)

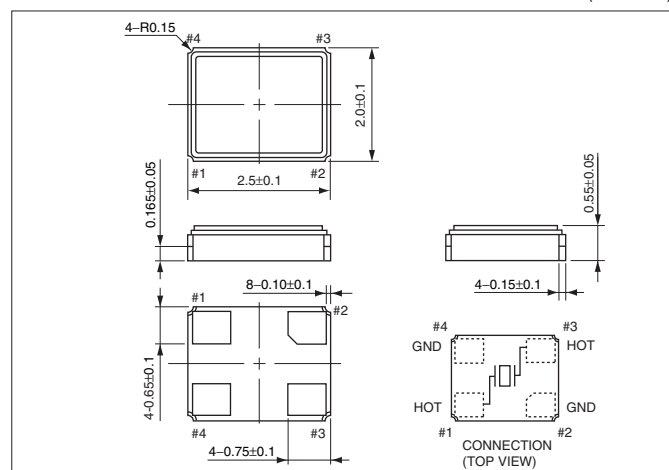

### Recommended Land Pattern

(Unit: mm)

