

SPECIFICATION

FOR APPROVAL

Customer : _____

Product Name : Mechanical Buzzer _____

Model Name : VSMB2312L _____

Drawing No. : VS20190826021 _____

Signature of Voise

Approved by	Checkde by	Issued by	Date



福爱斯电子有限公司
VOISE ELECTRONICS CO.,LTD.

Office Add:Haoyangguang B-302# No.968 Baizhang Road,Ningbo China

Factory add: Shishan Industrial Park Moushan Town Yuyao City China

Tel:86-0574-87471601 Fax:86-0574-87471603 P.C.315000

Http://www.nbvoise.com E-mail:sales@nbvoise.com

Table of contents

- 1. Revision
- 2. Scope
- 3. General Characteristics
- 4. Electrical and Acoustic Characteristics.
- 5. Dimensions
- 6. Packing

1. Revision

Rev.No.	Date	Page	Description of Revision
1.0	2019/8/26		Preliminary

2. Scope

This specification is applied to the siren used for sounder in alarm systems, Please contact us when using this product for any other applications than described in the above.

3. General


- 3.1 Out-Diameter : 23 mm
 3.2 Height : 15 mm
 3.3 Weight : 10 ±3g
 3.4 Operating Temperature range:
 -20~+60℃ without loss of function
 3.5 Store Temperature range:
 -30~+70℃ without loss of function

4. Electrical and Acoustic Characteristics.


Test condition : 15 ~ 35 ℃, 25% ~ 85% RH, 860~1060 mbar

No	Items	Specification
1	Rated Voltage	12V DC
2	Working Voltage	9-15 VDC
3	Max Rated Current	30mA/12VDC
4	Min Sound Pressure Level	80dB/12VDC/20cm
5	Resonant Frequency	400±100Hz
6	Housing Material	ABS
7	Color	Black

5. Dimensions

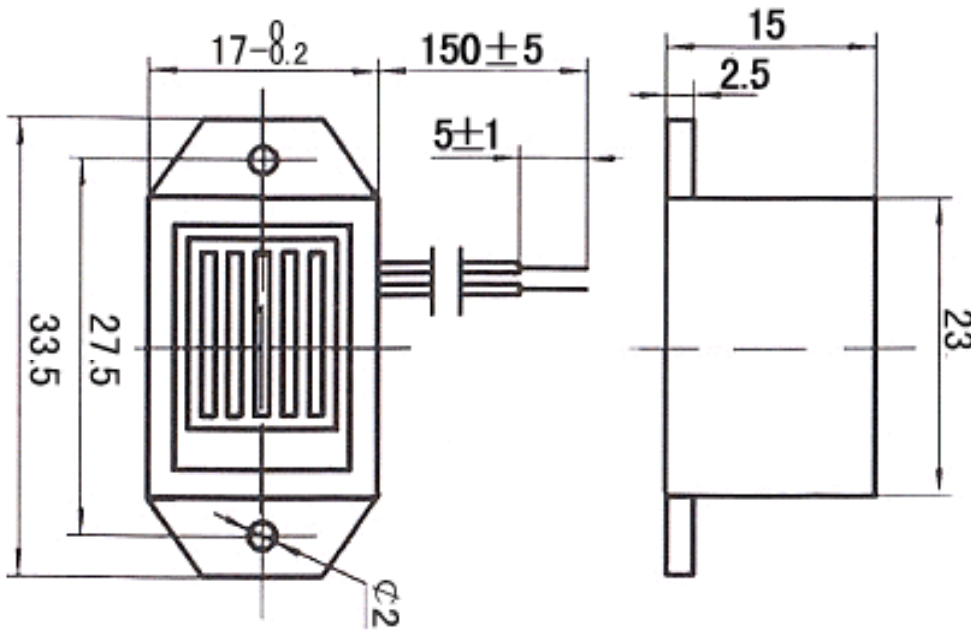

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance : ±1.5

Specification for Piezo Buzzer(Self-drive)	Page	5/5
Model No. : VSMB2312L	Revision No.	1.0
	Drawing No.	VS20190826021
<p>6. Packing</p> <p>Each minimum package unit of products shall be in a carton box and it shall be clearly marked with Part Number ,quantity and outgoing inspection number.</p> <p>There shall be no mechanical damage on products during in storage. .</p> <p style="text-align: right;">Total:200 pcs per box Size:41.5x27x31cm</p>		