

规格书编号

SPEC NO :

产品规格书

SPECIFICATION

CUSTOMER 客 户 : _____

PRODUCT 产 品 : _____ SAW FILTER _____

MODEL NO 型 号 : _____ HDF211T SMD-21 _____

PREPARED 编 制 : _____ CHECKED 审 核 : _____

APPROVED 批 准 : _____ D A T E 日 期 : _____ 2006-5-11 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

更改历史记录

History Record

[illegible]

1. SCOPE

This specification shall cover the characteristics of SAW filter used for IF applications.


2. ELECTRICAL SPECIFICATION

DC Voltage VDC	0V
AC Voltage Vpp	10V50Hz/60Hz
Operation temperature	-40°C to +85°C
Storage temperature	-45°C to +85°C
RF Power Dissipation	0dBm

2-1. Electrical characteristics


Preliminary data					
Characteristics					
Ambient temperance		TA=25°C			
Source impedance		ZS=50Ω			
load impedance		ZL=50Ω			
Characteristics		Minim	Typical	Maxim	Unit
Insertion attenuation 211.50MHz Reference level for the following data			21.0	22.0	dB
Center frequency fc		-	211.5	-	MHz
Pass Bandwidth	BW3	+/-20.0	-	-	MHz
	BW40	-	-	+/-27.0	MHz
Lower side lobe 150.0-180.0MHz		32.0	50.0		dB
Upper side lobe 238.0-268.0MHz		32.0	45.0		dB
Amplitude ripple			1.0	2.0	dB
Group delay Ripple (90% of BW3)			-	+/-100	ns
Temperature coefficient of frequency TC _f			-94		ppm/k

3. TEST CIRCUIT

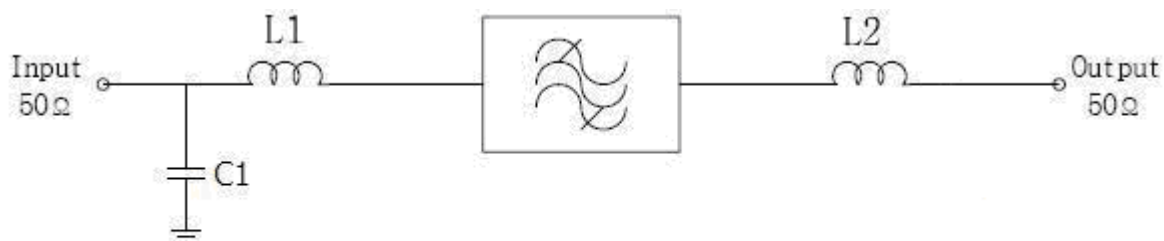

$$L1 = 39 \text{ nH} , L2 = 47 \text{ nH} , C1 = 20 \text{ pF}$$

4. DIMENSION

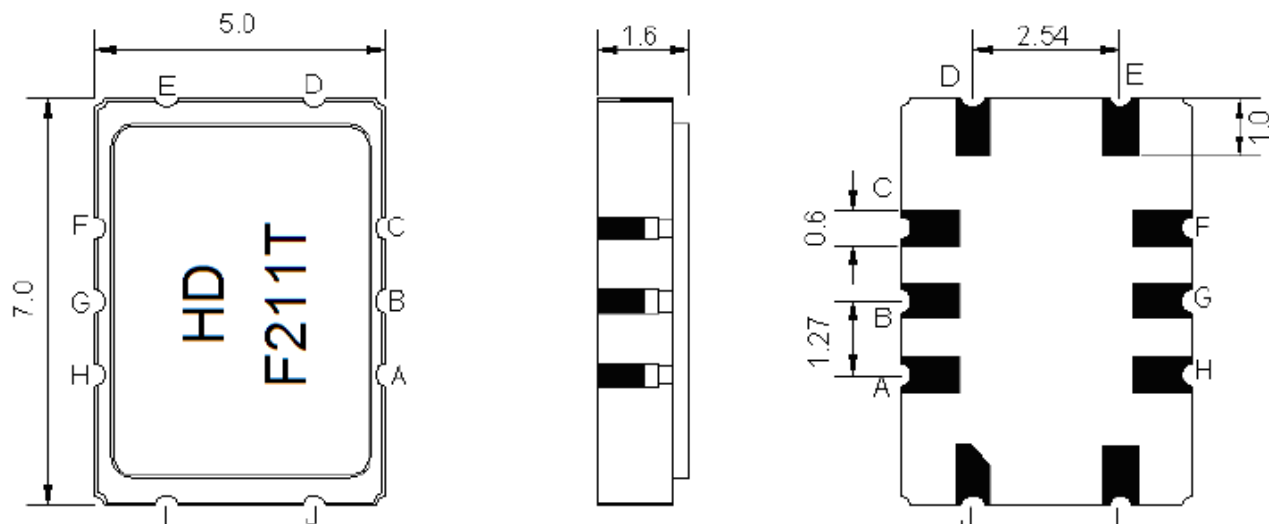

Pin Description	
A,B,C,F,G,H	Ground
I	Input
J	Ground
D	Output
E	Ground

5. ENVIRONMENTAL CHARACTERISTICS

5-1 Temperature cycling

Subject the device to a low temperature of -45°C for 30 minutes. Following by a high temperature of $+25^{\circ}\text{C}$ for 5 Minutes and a higher temperature of $+85^{\circ}\text{C}$ for 30 Minutes. Then release the device into the room conditions for 1 to 2 hours prior to the measurement. It shall meet the specifications in 2-1.

5-2 Resistance to solder heat

Submerge the device terminals into the solder bath at $260^{\circ}\text{C}\pm 5^{\circ}\text{C}$ for 10 ± 1 sec. Then release the device into the room conditions for 4 hours. It shall meet the specifications in 2-1.

5-3 Solderability

Submerge the device terminals into the solder bath at $245^{\circ}\text{C}\pm 5^{\circ}\text{C}$ for 5s, More than 95% area of the soldering pad must be covered with new solder. It shall meet the specifications in 2-1.

5-4 Mechanical shock

Drop the device randomly onto the concrete floor from the height of 1 m 3 times. the filter shall fulfill the specifications in 2-1.

5-5 Vibration

Subject the device to the vibration for 2 hour each in x,y and z axes with the amplitude of 1.5 mm at 10 to 55 hz. The filter shall fulfill the specifications in 2-1.

6. REMARK

6.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

6.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning

6.3 Soldering

Only leads of component may be soldered. Please avoid soldering another part of component.

7. Packing

7.1 Dimensions

(1) Carrier Tape: Figure 1

(2) Reel: Figure 2


(3) The product shall be packed properly not to be damaged during transportation and storage.

7.2 Reeling Quantity

1000 pcs/reel 7"
3000 pcs/reel 13"

7.3 Taping Structure


(1) The tape shall be wound around the reel in the direction shown below.

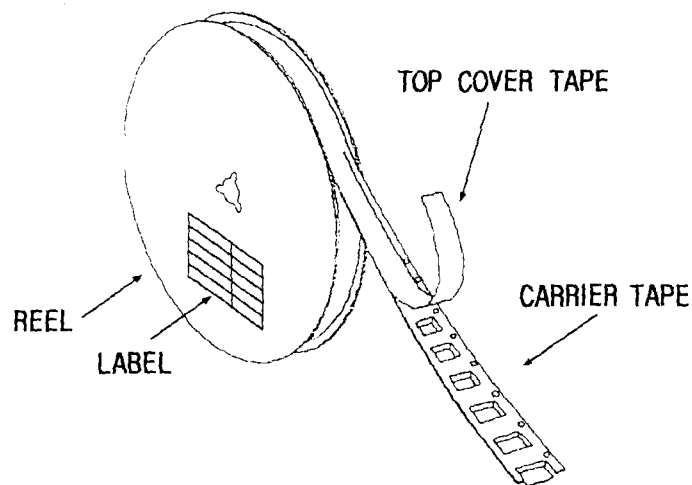

(2) Label

Device Name	
User Product Name	
Quantity	
Lot No.	

(3) Leader part and vacant position specifications.

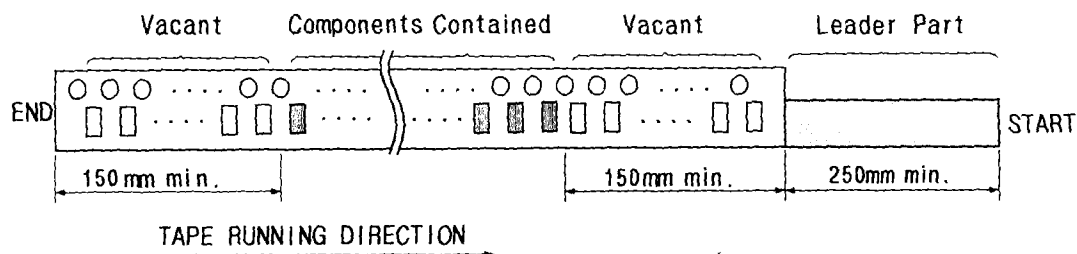


8. TAPE SPECIFICATIONS


8.1 Tensile Strength of Carrier Tape: 4.4N/mm width

8.2 Top Cover Tape Adhesion (See the below figure)

- (1) pull off angle: $0 \sim 15^\circ$
- (2) speed: 300mm/min.
- (3) force: 20~70g

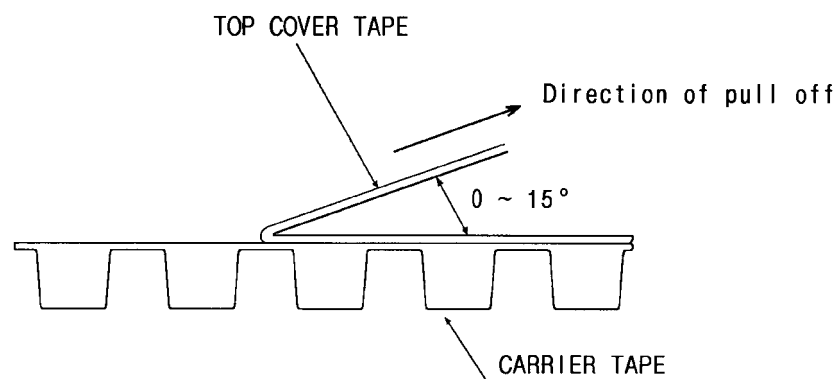

[Figure 1] Carrier Tape Dimensions

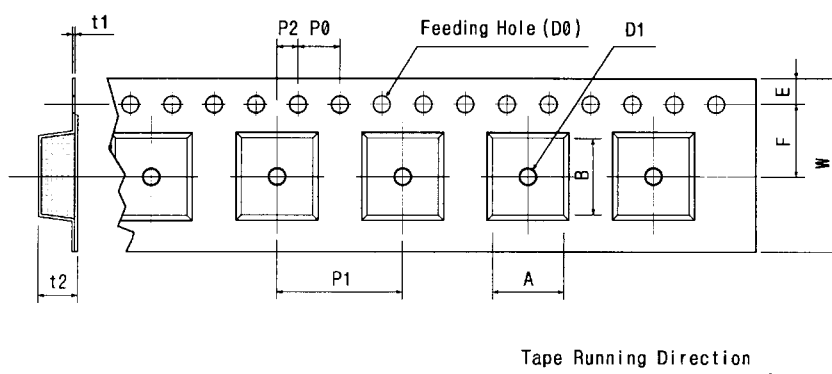


[Unit:mm]

W	F	E	P0	P1	P2	D0	D1	t1	t2	A	B
12.00 ±0.30	7.50 ±0.10	1.75 ±0.10	4.00 ±0.10	8.00 ±0.10	2.00 ±0.10	Ø1.50	Ø1.5 ±0.25	0.25 ±0.05	2.20 ±0.10	5.80 ±0.10	7.30 ±0.10

[Figure 2]

[Unit:mm]

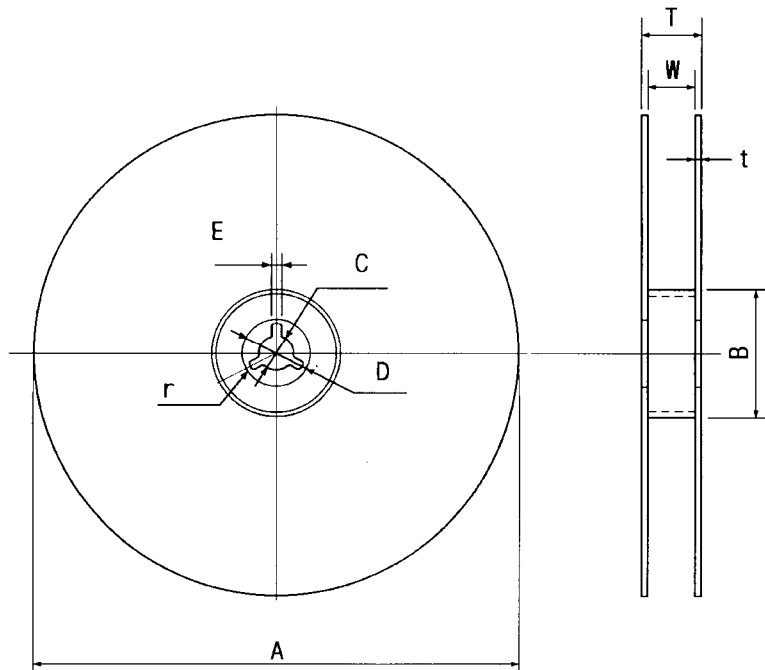

A	B	C	D	E	W	t	r
Ø330	Ø100	Ø13	Ø21	2	16.8	3	1.0
±1.0	±0.5	±0.5	±0.8	±0.5	±0.3	max.	max.

9. CAUTION

- 9-1. This is an electrostatic sensitive device. Please avoid static voltage during operation and storage.
- 9-2. Sudden change of temperature shall be avoided ,deterioration If the characteristics can occur.
- 9-3. Ultrasonic vibration may cause deterioration and destruction of the components Please avoid ultrasonic cleaning.