

规格书编号

SPEC NO :

产品规格书


SPECIFICATION

CUSTOMER 客户: _____
PRODUCT 产品: _____ SAW FILTER _____
MODEL NO 型号: _____ HDF632E4-S4 _____
MARKING 印字: _____ HDF4633 _____
PREPARED 编制: _____ CHECKED 审核: _____
APPROVED 批准: _____ D A T E 日期: _____ 2016-05-12 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

1. Package Dimension

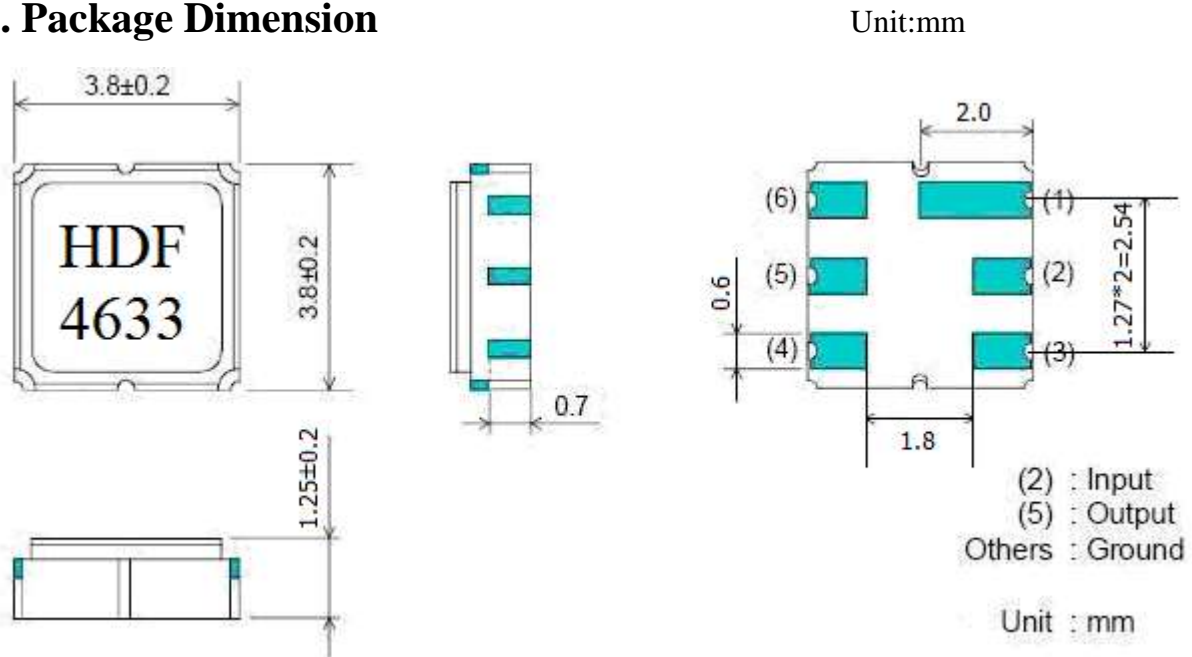

2. Performance

2.1 Maximum Rating


Items	Rating	unit
Maximum Working Voltage	10	V _{dc}
Maximum Working Power	10	dBm
Operating Temperature Range	-40 ~ +85	°C
Storage Temperature Range	-40 ~ +85	°C

2.2 Electronic Characteristics

(at 25°C ± 5°C)

	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	632	-
Insertion Loss (In Fc +/- 10MHz)	dB		2.5	3.5
Amplitude Ripple (In Fc +/- 10MHz)	dB		1.0	2.0
Relative Attenuation				
10 ~ 572 MHz	dB	40	50	-
692 ~ 1000 MHz		40	50	
Input/Output Impedance	Ohms		50	

2.3 Frequency Characteristics

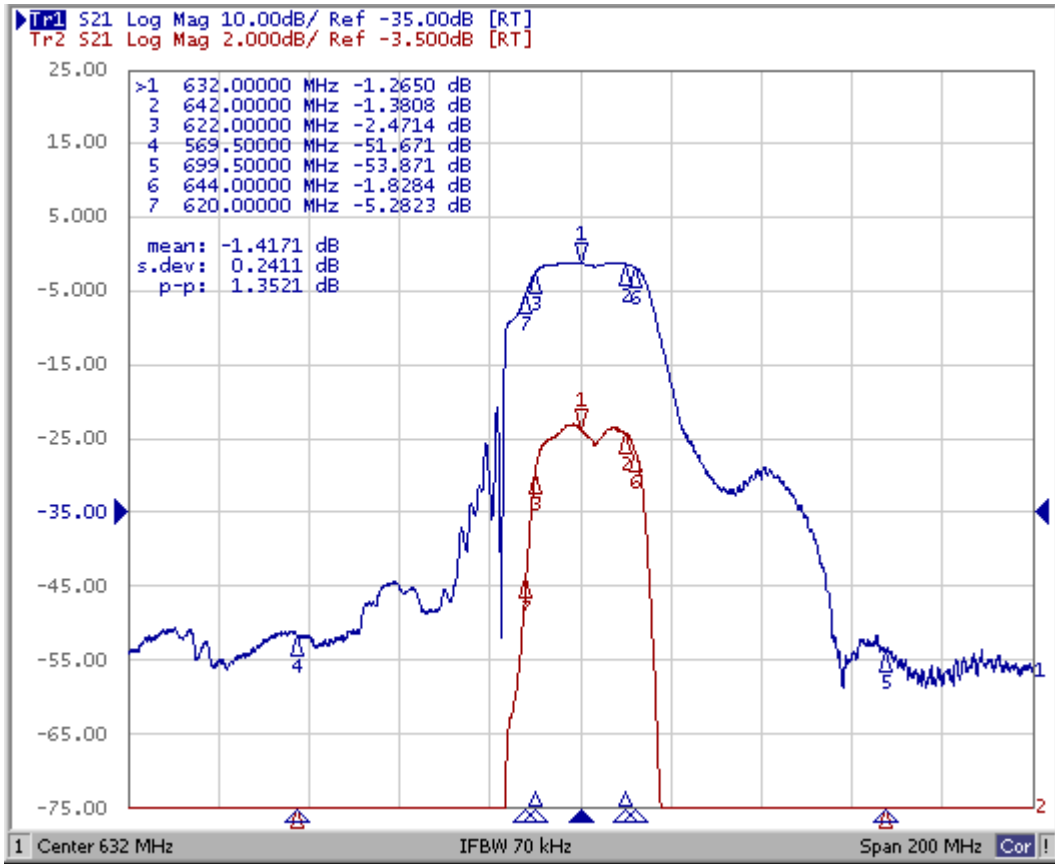

3. Test Circuit

